

Arco

wall light

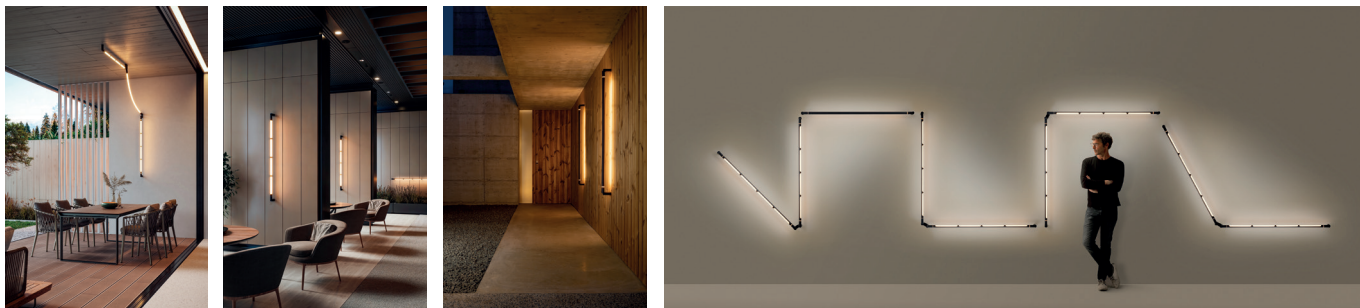


Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & Accessories	Page 3
5. Photometric data and technical information	Page 3
6. Installation	Page 3
7. Ordering codes	Page 4
8. Certifications & standards	Page 6
9. Maintenance & Cleaning	Page 6

Versions



ARC_4000X
Page 4



ARC_4000X2
Page 4



ARC_4000X3
Page 5

Arco

wall light

1. Product overview


Wall light featuring an illuminated silicone tube housed within a metal structure that allows rotation to direct light, offering both direct and indirect lighting.

Ideal for creating compositions of up to three units powered by a single remote driver. The remote driver must be installed in an IP65-rated box or a dry location, up to 15 meters from the fixture.

An optional surface canopy with an IP65 junction box to house the driver is available. Finished with a double-layer coating for high resistance to corrosion, making it suitable for maritime environments.



2. Finishes and Materials



Tube: Silicone

Metal: 96 Anthracite

3. Light Source & Dimming

Lamping per head:

LED 12W (2700K / Ang. 120° / >90 CRI / 24V)

230V / Typ 1092 lumens

*Integrated LED module (included).

Remote driver required

Dimming options:

Standard: TRIAC


Optional: DALI

Arco

wall light


4. Functionality & Accessories

Accessory: surface canopy with IP/65 j-box to fit the driver. Code: 114002960




Direct light:

Indirect light:

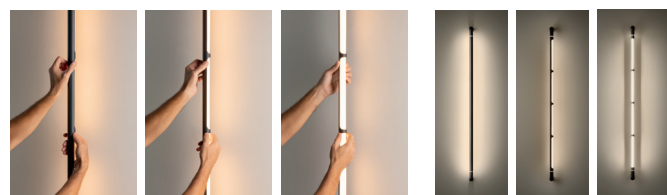


Possible shapes: possibility to create compositions with up to three units using a single driver.

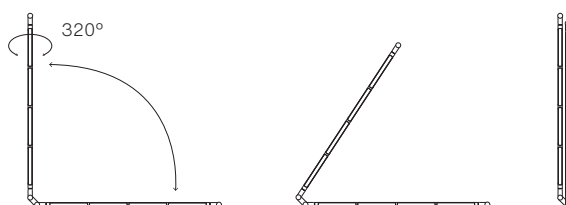

5. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.
Access to photometric files in download area.


2D / 3D / BIM Files available.
Access to files in download area here



6. Installation


Remote driver

It must be placed in an IP/65 box or in a dry location, maximum 15m from the lamp.



Optional Surface Canopy

Accessory: surface canopy with IP/65 j-box to fit the driver.

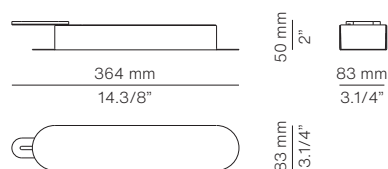

Code: 114002960

7. Ordering Codes

Lamping 4000X

LED 12W (2700K / Ang. 120° / >90 CRI / 24V)
230V / Typ 1092 lumens
*Integrated LED module (included).
Remote driver required


Finishes:

Tube: Silicone
Metal: 96 Anthracite

DIM: TRIAC (Optional: DALI)

Drawing

ARC_4000X
IP65

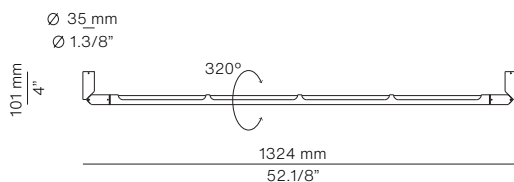

Finish

Anthracite

Ordering Code

ARC_4000X_96W

Lamping 4000X2

LED 2x12W (2700K / Ang. 120° / >90 CRI / 24V)
230V / Typ 2x1092 lumens
*Integrated LED module (included).
Remote driver required


Finishes:

Tube: Silicone
Metal: 96 Anthracite

DIM: TRIAC (Optional: DALI)

Drawing

ARC_4000X2
IP65

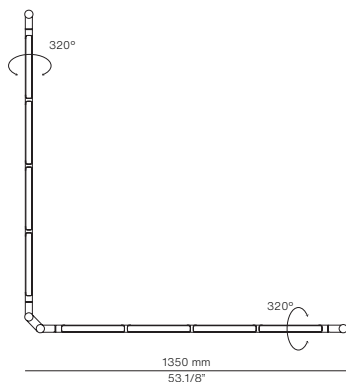


Finish

Anthracite

Ordering Code

ARC_4000X2_96W



Arco

wall light

7. Ordering Codes

Lamping 4000X3

LED 3x12W (2700K / Ang. 120° / >90 CRI / 24V)

230V / Typ 3x1092 lumens

*Integrated LED module (included).

Remote driver required

Finishes:

Tube: Silicone

Metal: 96 Anthracite




DIM: TRIAC (Optional: DALI)

Drawing

ARC_4000X3

IP65

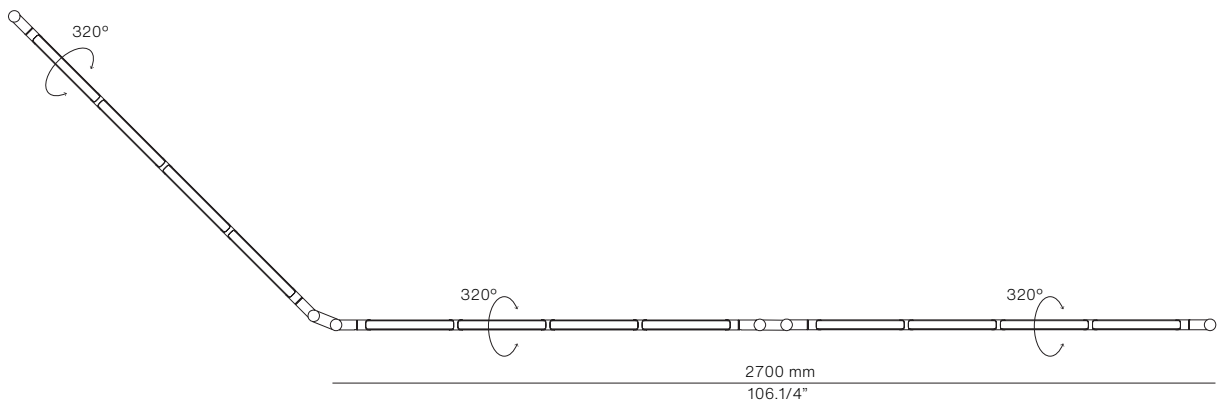

Finish

Anthracite

Ordering Code

ARC_4000X3_96W

8. Certifications & Standards



Warranty: 2 years

100% made in Spain

9. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.