



Application: offices, shops, entrance lobbies, apartments
Housing: cast aluminum
The color of the housing: Black / White
Lifetime Lxx Bxx: L70B50@60.000h
Color rendering index: 80
Color temperature: 3000 K
Type of control: DALI
Power Supply: electronic, to be ordered separately (DALI)
Other: Input voltage - 48V DC




Code	36.0146.31.830.DALI
Family	INSIGHT SPOT
Length L	116 mm
Luminaire luminous flux	1600 lm
Luminaire power	21 W
Luminaire luminous efficacy	76 lm/W
Color rendering index	80
Color temperature	3000 K
Supply voltage	48V DC
Distribution angle	34 °
IP (top/bottom)	IP20

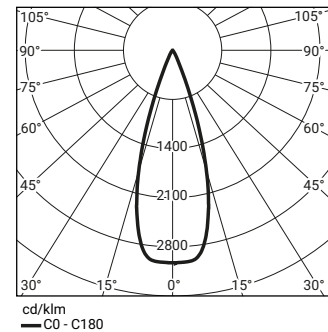

The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.

[mm]

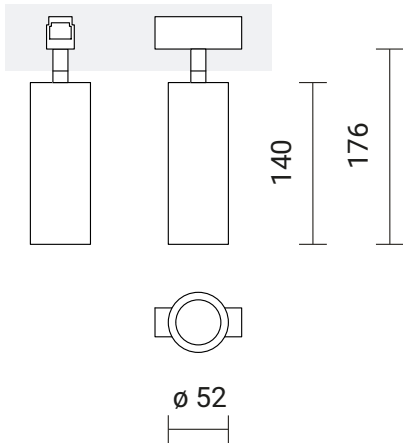

The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.