




## LLS-C

LLS-C, of 35/ 55mm luminous surface, is available in any diameters and any radians. It can be spliced with 20m/ roll flexible diffuser and twisted 90°/ 180° to form creative 3D styling.

# Product Overview


AS3535 Series

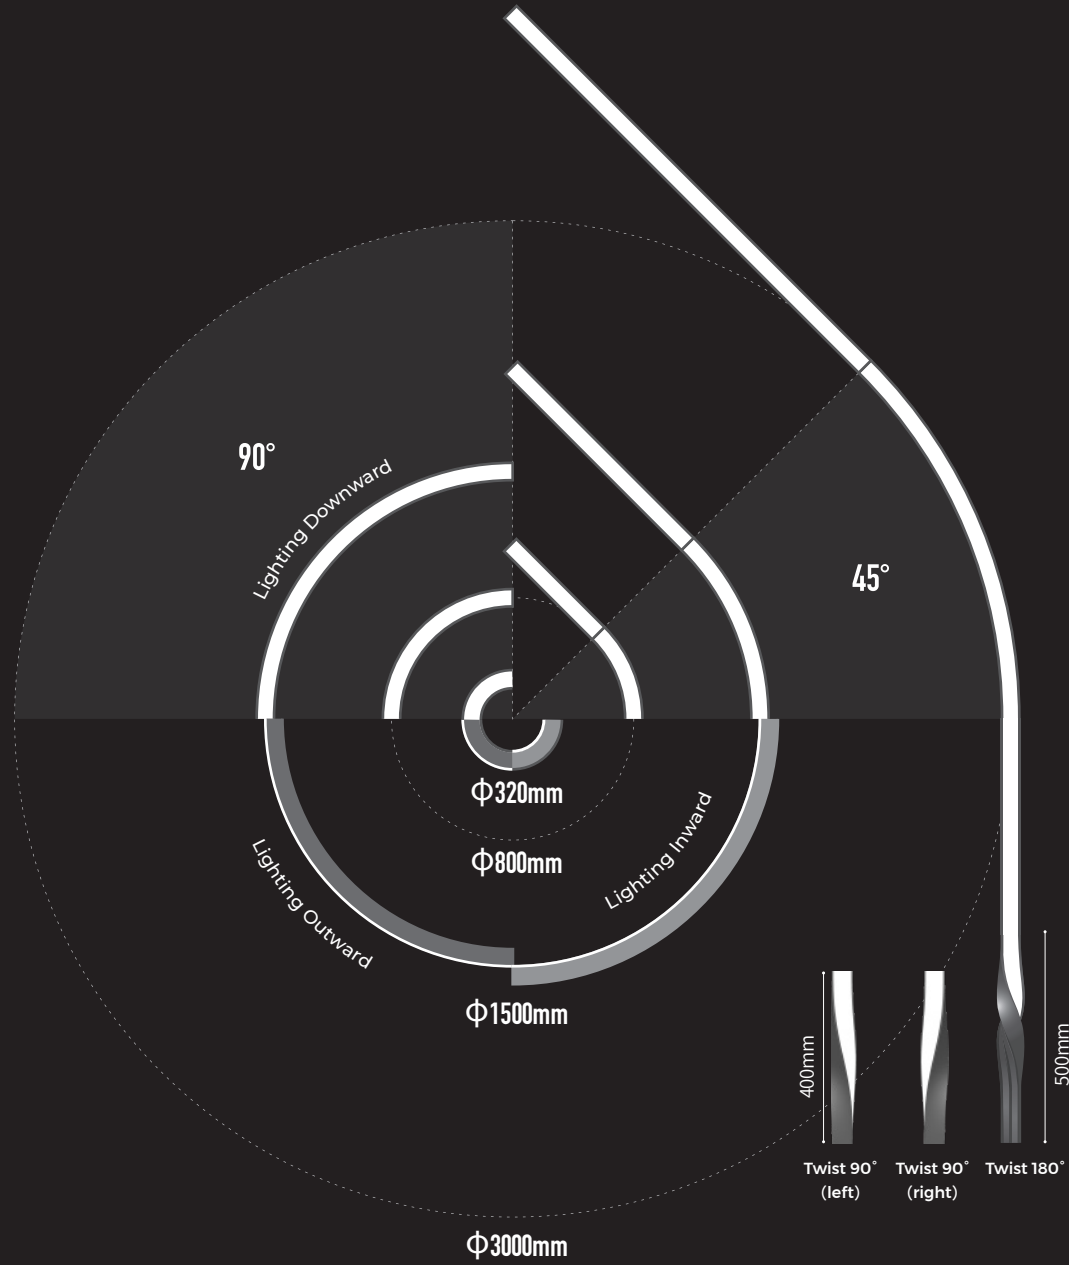

- φ800mm, Curve 90° (Lighting Downward), 45° Rigid Modular
- φ800mm, Curve 45° (Lighting Downward), 45° Rigid Modular
- φ1500mm, Curve 90° (Lighting Downward), 45° Rigid Modular
- φ1500mm, Curve 45° (Lighting Downward), 45° Rigid Modular
- φ1500mm, Curve 90° (Lighting Inward), Flexible Strip
- φ1500mm, Curve 90° (Lighting Outward), Flexible Strip
- φ3000mm, Curve 45° (Lighting Downward), 22.5° Rigid Modular
- Straight Line (2500mm), Rigid Module (499mm)
- φ320mm, Curve 90° (Lighting Downward), 90° Rigid Modular
- φ320mm, Curve 90° (Lighting Outward), Flexible Strip
- φ320mm, Curve 90° (Lighting Inward), Flexible Strip
- 400mm, Twist 90° (left), Flexible Strip
- 400mm, Twist 90° (right), Flexible Strip
- 500mm Twist 180°, Flexible Strip

# Product Overview

AH5060 Series

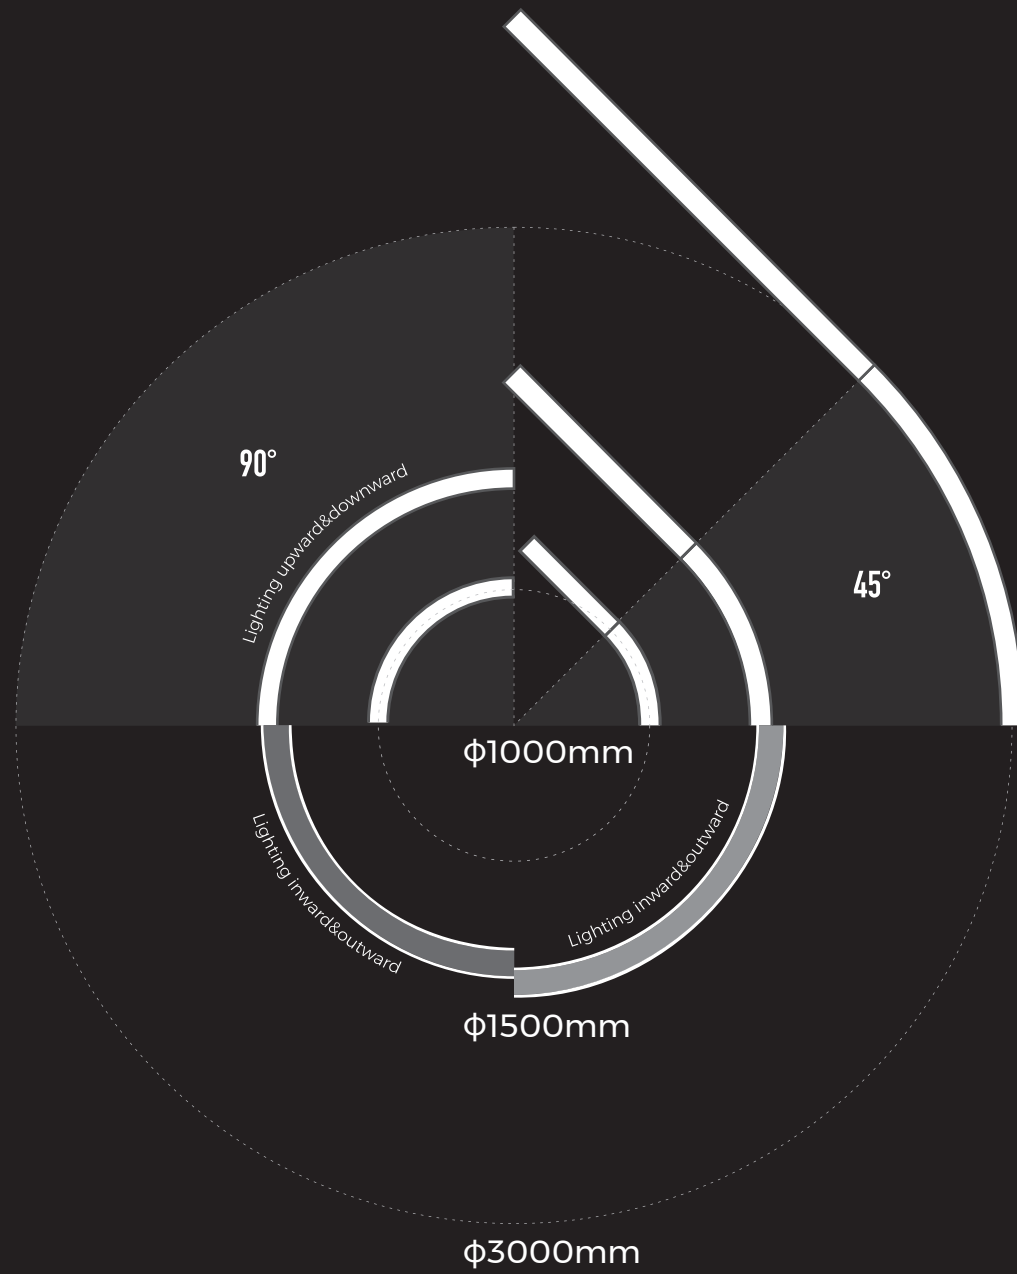

φ1000mm, Curve 90° (Lighting upward&downward),  
45° Rigid Module



φ1000mm, Curve 45° (Lighting upward&downward),  
45° Rigid Module



φ1500mm, Curve 90° (Lighting upward&downward),  
45° Rigid Module



φ1500mm, Curve 45° (Lighting upward&downward),  
45° Rigid Module



φ1500mm, Curve 90° (Lighting inward&outward),  
Flexible Strip



φ1500mm, Curve 90° (Lighting inward&outward),  
Flexible Strip



φ3000mm, Curve 45° (Lighting upward&downward),  
22.5° Rigid Module



Straight Line (2500mm),  
Rigid Module (499mm)












# AS3535-2500

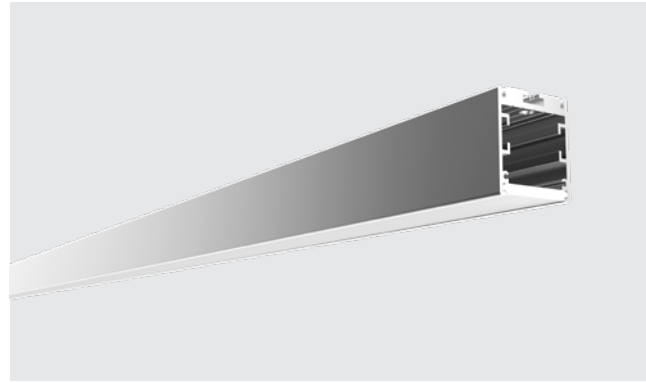


## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-2500 35x35x2500mm	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	



## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm	
Trimless recessed accessory	RE-13 78x34x15mm	

## Interconnection Accessory


Splicing bar	EX-26 25x23.5x4.6mm	
--------------	------------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

## Rigid module

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm	>80 >90	1440LM/pcs	24V	9.6W/ pcs	499x20x5.8mm	80LEDs	100mm / 16LEDs

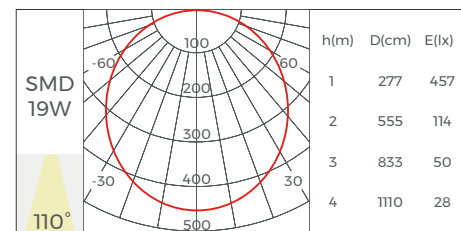

# AS3535-03A90




## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-03A90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

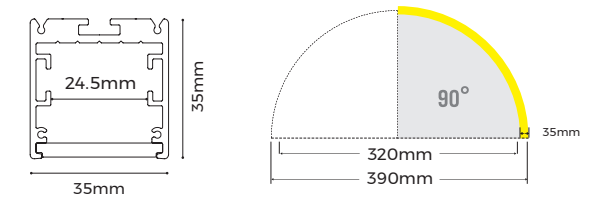


## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm	
Trimless recessed accessory	RE-13 78x34x15mm	

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-03A90	>80 >90	810LM/M	24V	5.4W/m	D320x90°x20x5.8mm	48LEDs	16LEDs

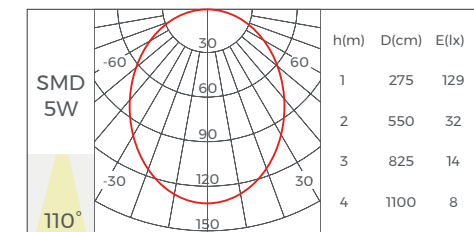

# AS3535-03N90




## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Inward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


## Profile components

Profile	AS3535-03N90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

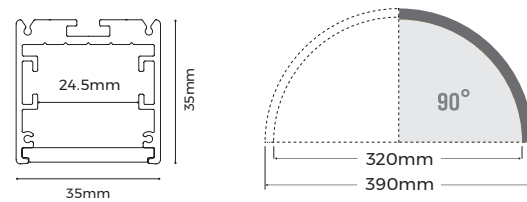

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm	

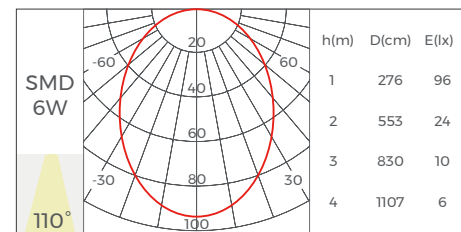

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

## Control

Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

# AS3535-03W90




## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Outward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


## Profile components

Profile	AS3535-03W90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

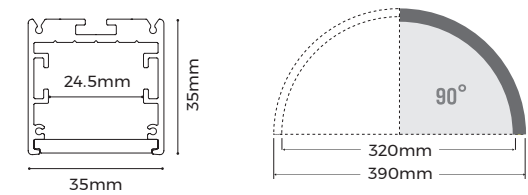

## Installation Accessory


Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm	

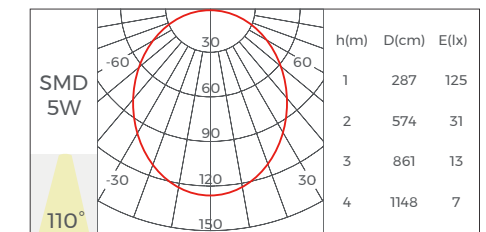

## Light Source


Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

# AS3535-08A45/90

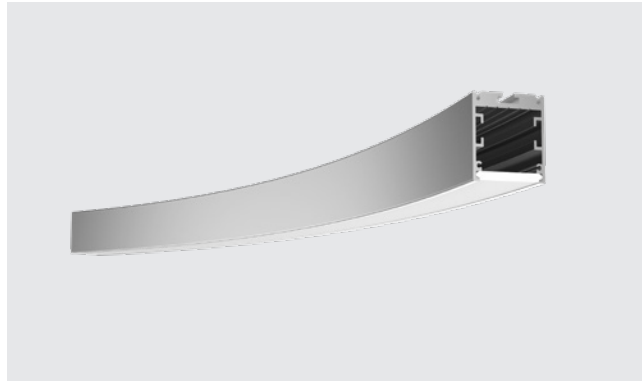

## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


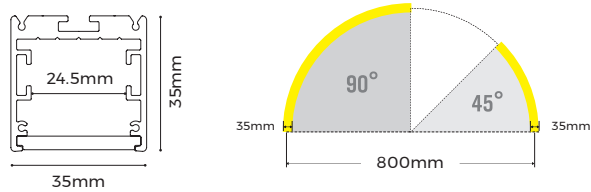


## Profile components

Profile	AS3535-08A45/90 35x35mm, D800mm, 45/90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ250x20x0.6mm	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm	
Trimless recessed accessory	RE-13 78x34x15mm	

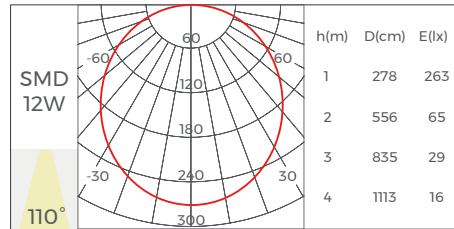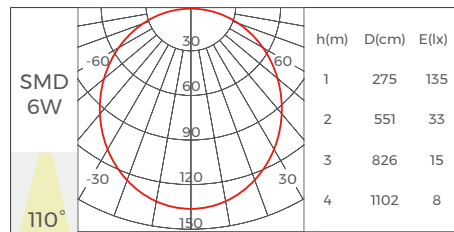


## Interconnection Accessory

Splicing bar	EX-26 30x23.5x4.6mm	
--------------	------------------------	--

## Light Source


Model	CRI	Lumens (4000K)	Voltage	Typ. power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-08A45	>80 >90	870LM/ pcs	24V	5.8W/ pcs	D800x45x20x5.8mm	48LEDs	16LEDs

# AS3535-15A45/90

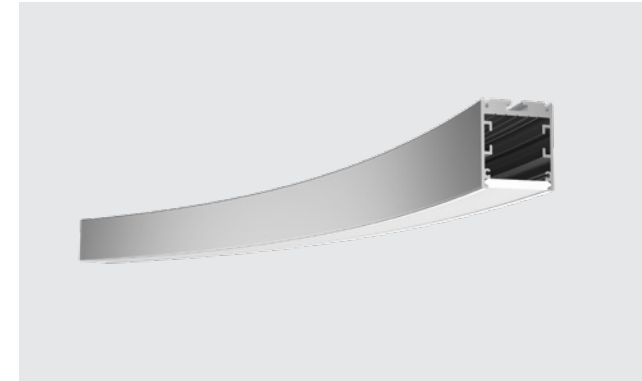

## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


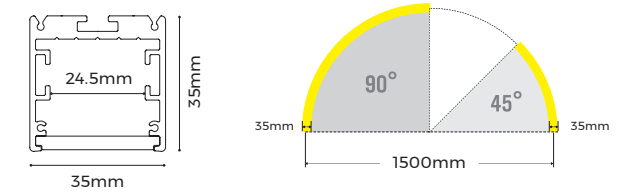


## Profile components

Profile	AS3535-15A45/90 35x35mm, D1500mm, 45/90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ350x20x0.6mm	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm	
Trimless recessed accessory	RE-13 78x34x15mm	

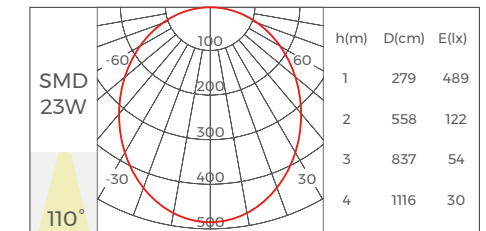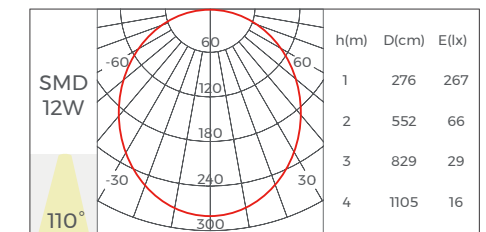

## Interconnection Accessory


Splicing bar	EX-26 L30x23.5x4.6mm	
--------------	-------------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ. power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-15A45	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D1500x45x20x5.8mm	96LEDs	16LEDs



# AS3535-15N90

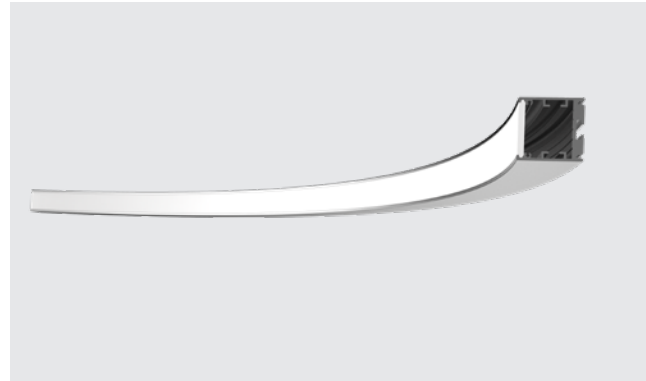


## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Inward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-15N90 35x35mm, D1500mm, 90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

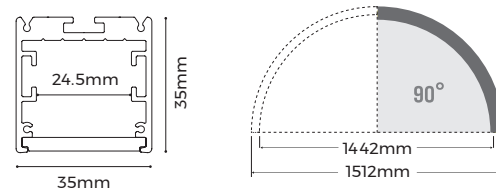

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ350x20x0.6mm	
Mounting clip	CL-O4	
Screw set	CL-O1 M3.5x40mm	

## Control


Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

## Interconnection Accessory

Splicing bar	EX-26 L30x23.5x4.6mm	
--------------	-------------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

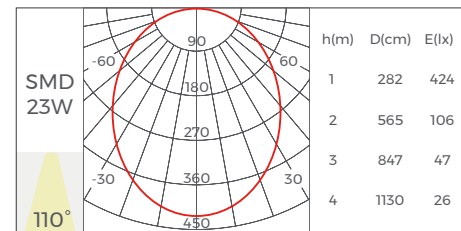

# AS3535-15W90




## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Outward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-15W90 35x35mm, D1500mm, 90°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

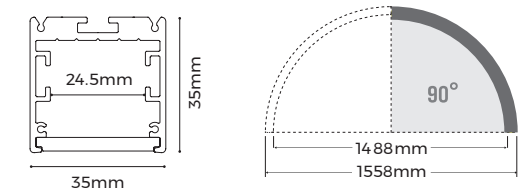

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ350x20x0.6mm	
Mounting clip	CL-O4	
Screw set	CL-O1 M3.5x40mm	

## Control


Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

## Interconnection Accessory


Splicing bar	EX-26 L30x23.5x4.6mm	
--------------	-------------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

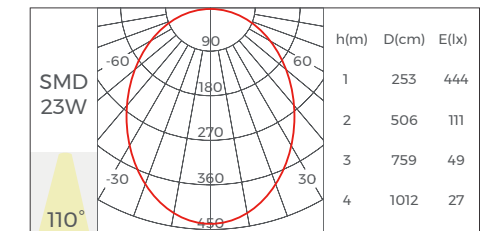

# AS3535-30A45

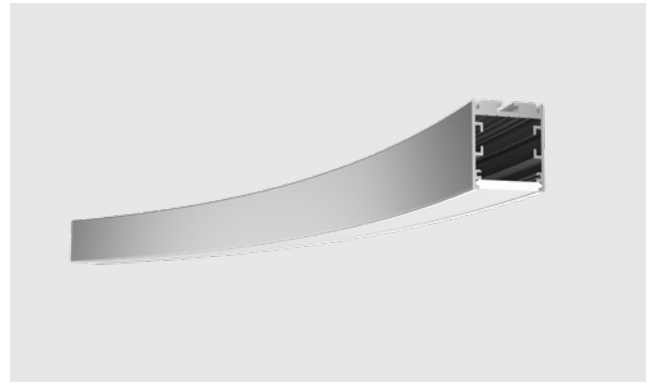

## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-30A45 35x35mm, D3000mm, 45°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory



Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm	
Trimless recessed accessory	RE-13 78x34x15mm	

## Interconnection Accessory

Splicing bar	EX-26 L30x23.5x4.6mm	
--------------	-------------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ. power	Size	LEDs/pcs	Cutting unit
DY8160-24V-20mm-30A23	>80 >90	1740LM/pcs	24V	11.6W/pcs	D3000x22.5x20x5.8mm	96LEDs	16LEDs

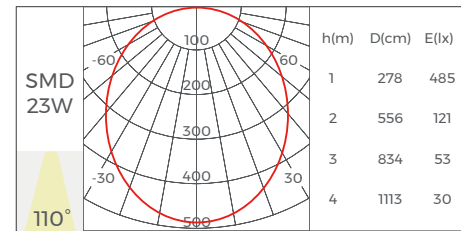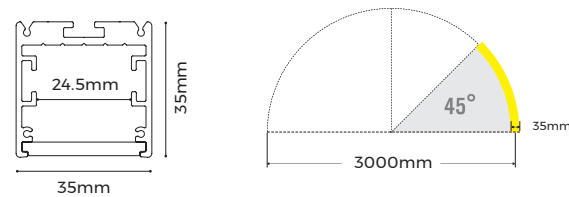

# AS3535-04T90L



## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-04T90L 35x35x400mm, twist 90° left	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory



Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ. power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

## Control

Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

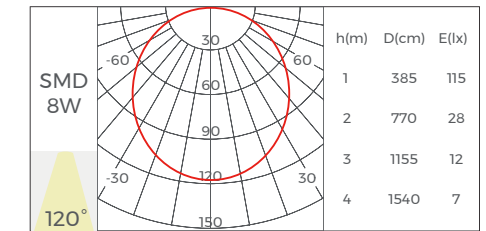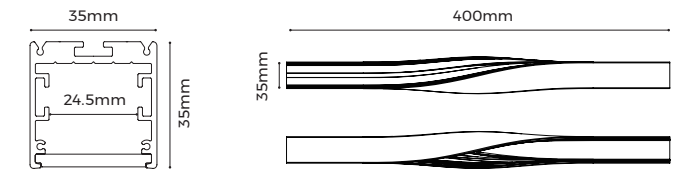



# AS3535-04T90R



## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-04T90R 35x35x400mm, twist 90° right	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory



Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

## Control

Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

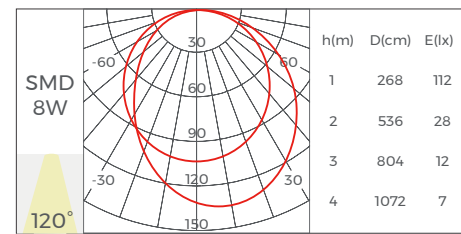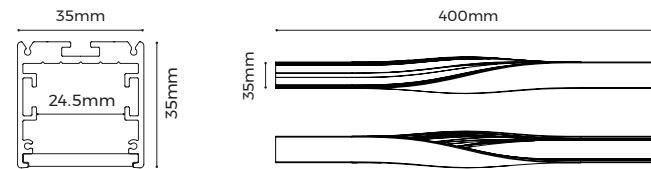

# AS3535-05T180



## Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

## Profile components

Profile	AS3535-05T180 35x35x500mm, twist 180°	
Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AS3535 35x35x1.5mm	

## Installation Accessory



Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	

## Light Source


Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

## Control

Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

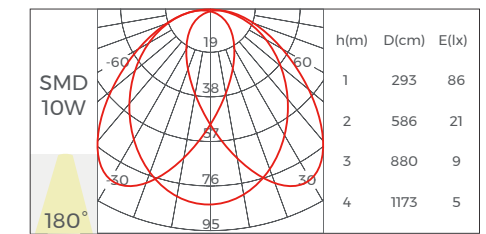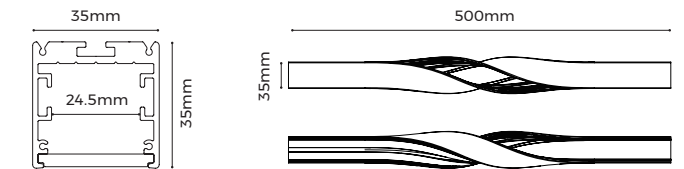


# AH5060-2500

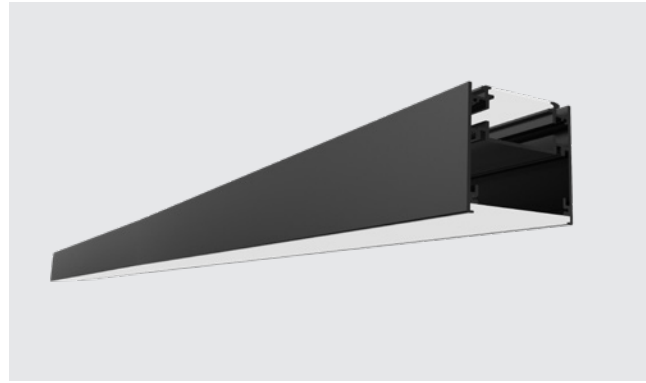

## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



## Profile components

Profile	AH5060-2500 L2500×W50×H60mm	
50 Diffuser	CV-AH5060FD L20000×W47×H4mm	
35 Diffuser	CV-AS3535FD L20000×W32×H3.5mm	
End cap	EC-AH5060 L60×W50×H2mm	

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5×20×12mm	
Mounted Screw	CL-15 M3.5×50mm	

## Interconnection Accessory


Splicing bar	EX-25 25×32×8.5mm	
--------------	----------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm /8LEDs
DMA120-24V-15MM	/	720LM/M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm /6LEDs
DA168-24V-15MM	/	815LM/M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm /6LEDs
DS8320-24V-15MM	>80 >90	2880LM/M	24V	38.4W/m	4000x20x1.5mm	320LEDs	50mm /8LEDs

## Rigid Module

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8160-24V-20mm	>80 >90	1440LM/pcs	24V	9.6W/pcs	499x20x5.8mm	80LEDs	100mm /16LEDs

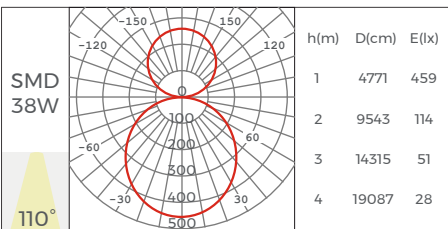


# AH5060-10A45/90



## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

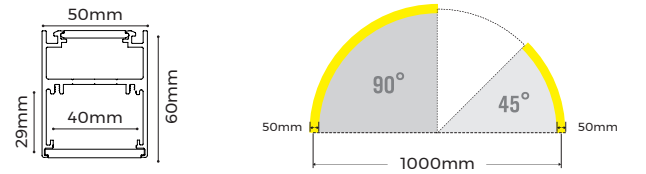

## Profile components

Profile	AH5060-10A45/90 50×60,D1000mm,45°/90°	
50 Diffuser	CV-AH5060FD L20000×W47×H4mm	
35 Diffuser	CV-AS3535FD L20000×W32×H3.5mm	
End cap	EC-AH5060 L60×W50×H2mm	

## Installation Accessory



Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5×20×12mm	
Mounted Screw	CL-15 M3.5×50mm	

## Interconnection Accessory

Splicing bar	EX-25 39.5×20×12mm	
--------------	-----------------------	--

## Light Source

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8160-24V-20mm-10A45	>80 >90	11125LM/pcs	24V	7.5W/pcs	D1000x45°x20x5.8mm	64LEDs	16LEDs

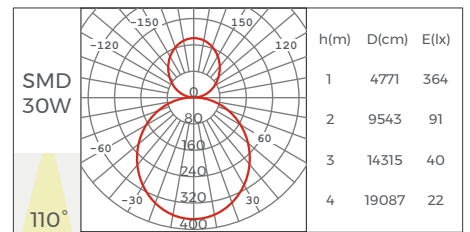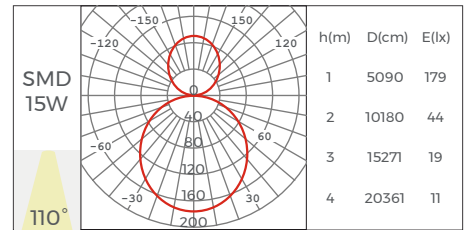




# AH5060-15A45/90



## Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

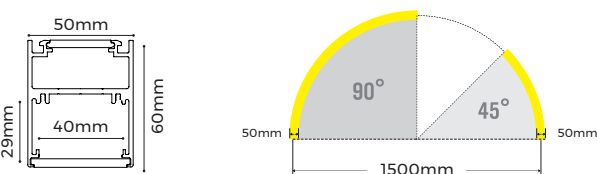

## Profile components

Profile	AH5060-15A45/90 50x60,D1500mm,45°/90°	
50 Diffuser	CV-AH5060FD L20000xW47xH4mm	
35 Diffuser	CV-AS3535FD L20000xW32xH3.5mm	
End cap	EC-AH5060 L60xW50xH2mm	

## Installation Accessory

Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5x20x12mm	
Mounted Screw	CL-15 M3.5x50mm	

## Interconnection Accessory

Splicing bar	EX-25 39.5x20x12mm	
--------------	-----------------------	--

## Light Source

Rigid Module								
		2700K	3000K	3500K	4000K	5000K	6500K	
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit	
DY8160-24V-20mm-15A45	>80 >90	1125LM/ pcs	24V	11.6W/ pcs	D1500x45x20x5.8mm	64LEDs	16LEDs	

