

# ILLIMITÉ MINI MT15 SERIES




# ILLIMITÉ MINI

MT15

## Ultra-Thin

ILLIMITÉ MINI lighting system offers a highly flexible and adaptable solution for creating dynamic lighting environments. Track lighting with modular components, these systems allow for the repositioning and customization of light modules, enabling users to design and change lighting settings as needed.

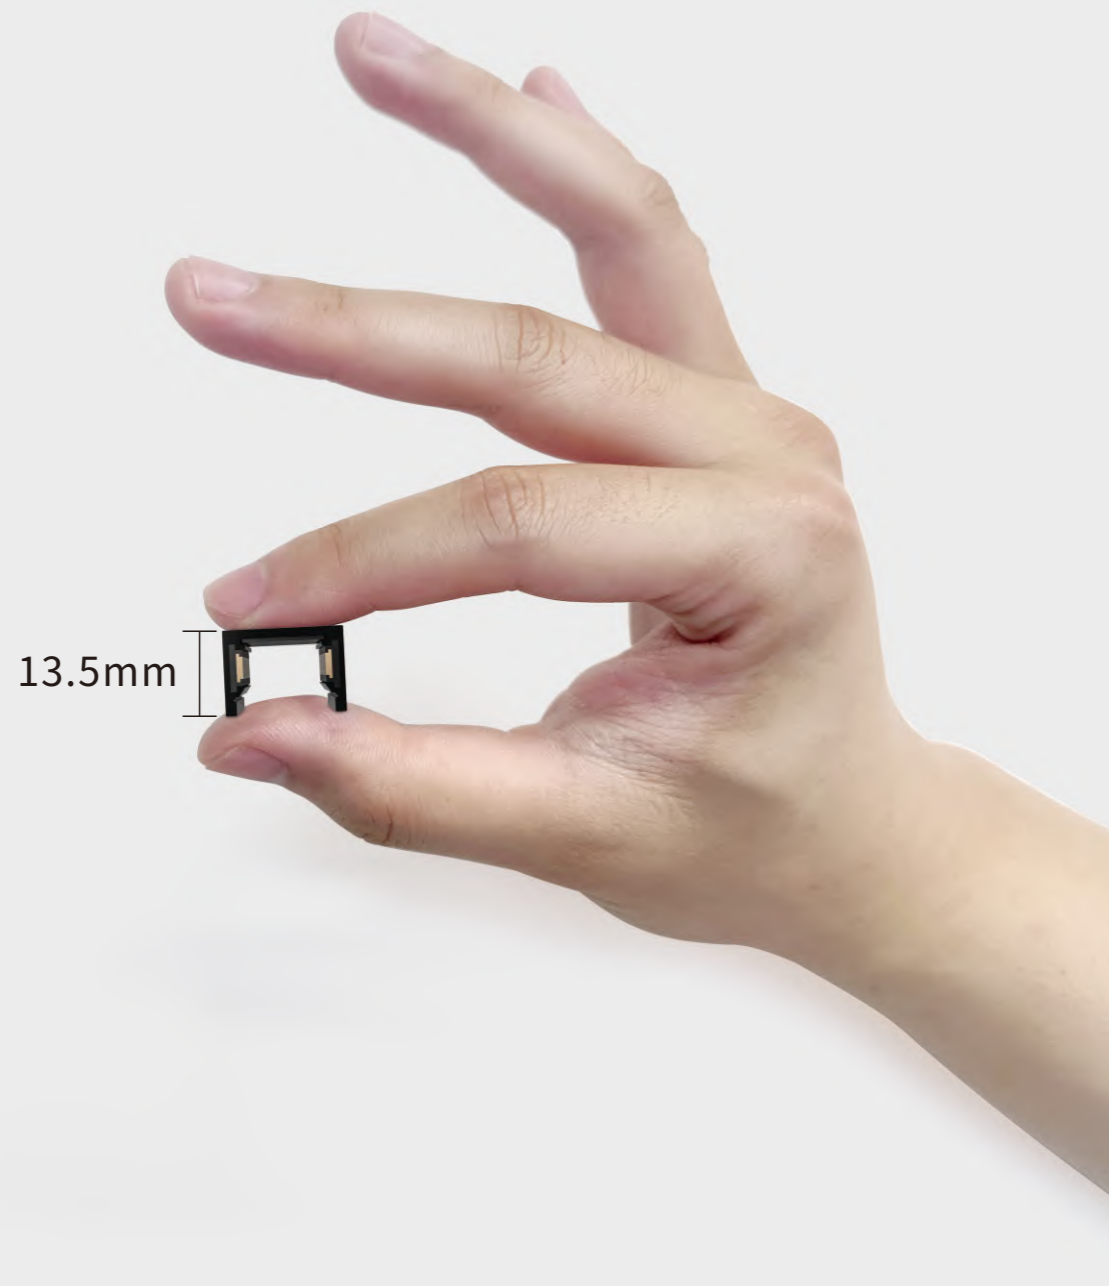



**Ultra thin profiles**

The track rail features an ultra-slim design with a height of just 13.5mm, offering seamless integration into walls or ceilings. Its versatile installation options include corner connectors to accommodate various layouts, enabling architects and designers to explore more creative and dynamic interior designs. This system not only enhances functionality but also allows for an innovative approach to spatial aesthetics, making it an ideal solution for contemporary interior spaces.



Our simple, slim track system offers effortless installation and endless design possibilities. Its sleek, minimalist design seamlessly integrates into various interior styles, bringing a modern aesthetic to any space.


Flexible Design  
Multi-Directional Setup  
Aesthetic

**Track standard specification**


3000mm      2000mm      1000mm




MT15S - Surface mount





MT15R - recessed mount

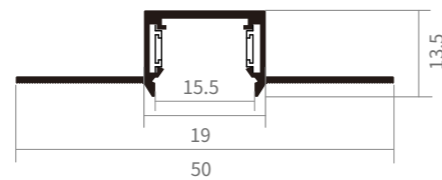


MT15-SPS pre-buried mount

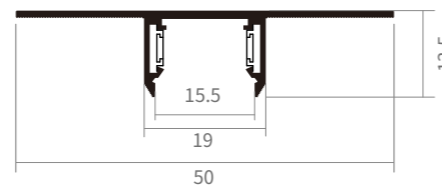

MT15-RSSS round hanging mount

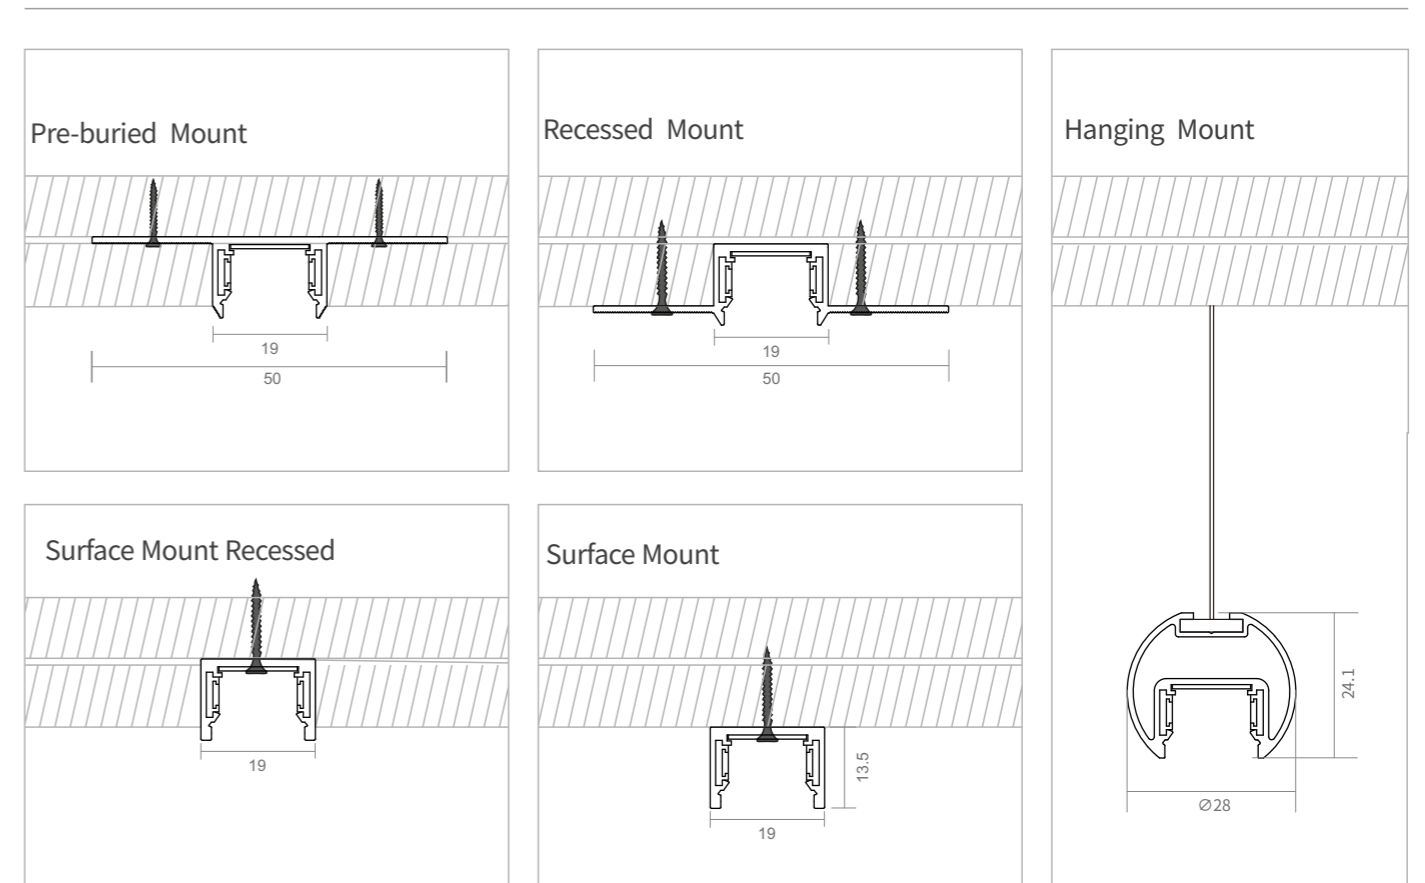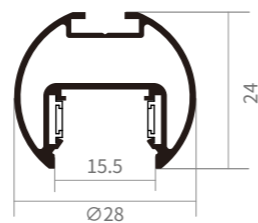



**A** CN15-SSSHO  
Horizontal Corner  
Of Surface Mount  
Black



**B** AS15-JT04  
Horizontal Corner  
Energized connector  
Black



**C** CN15-SSSIN  
Inner corner Of  
Surface Mount  
Black



**D** AS15-JT03  
Flexible Energized  
connector Black



**E** CN15-SPSHO  
Horizontal Corner  
Of Pre-buried Track  
Black




**B** AS15-JT04  
Horizontal Corner  
Energized connector  
Black



**F** CN15-SPSIN  
Inner Corner Of  
Pre-buried Track  
Black



**D** AS15-JT03  
Flexible Energized  
connector Black



**E** CN15-SPSHO  
Horizontal Corner  
Of recessed track  
Black



**B** AS15-JT04  
Horizontal Corner  
Energized connector  
Black



**F** CN15-SPSIN  
Inner Corner Of  
recessed track  
Black



**D** AS15-JT03  
Flexible Energized  
connector Black



MT15-RSS  
Round Suspended  
Track Black



**A** CN15-SPSHO  
Horizontal Corner Of  
Round Suspended Track  
Black



**B** AS15-JT04  
Horizontal Angle  
Energized connector  
Black















# Colors





## MODULES

-  **A** Grille Linear Light Black  
M15-GL06;M15-GL12
-  **B** Flood Linear Light Black  
M15-FL30;M15-FL60
-  **C** Anti-glare GrilleLight Black  
M15-CG06;M15-CG12
-  **D** Adjustable Grille Light Black  
M15-AG08;M15-AG16
-  **E** Grille Light Black  
M15-GO08;M15-GO16
-  **F** Global Light Black  
M15-LG80;M15-LGS80
-  **G** Spotlight Black  
M15-SP20;M15-SP30  
M15-SP40;
-  **H** Circular Atmosphere light Black  
M15-RL01
-  **J** Square Atmosphere light Black  
M15-RL02
-  **K** Global pendant light Black  
M15-SU02;M15-SU03
-  **L** Global pendant light Frost  
M15-SU01
-  **M** Conical pendant light Black  
M15-SU04







# M15 Luminaire Features

Strong Magnetic



Independent Development of Optical system

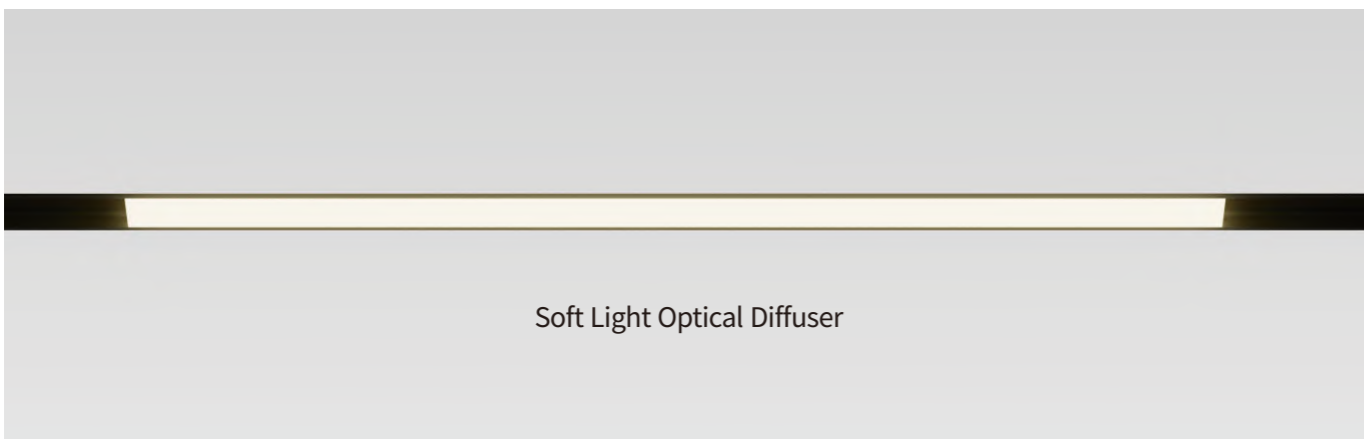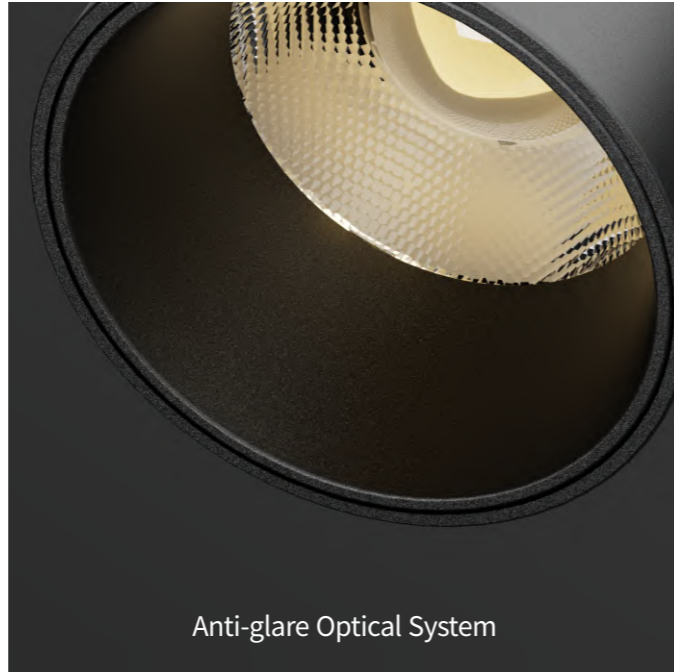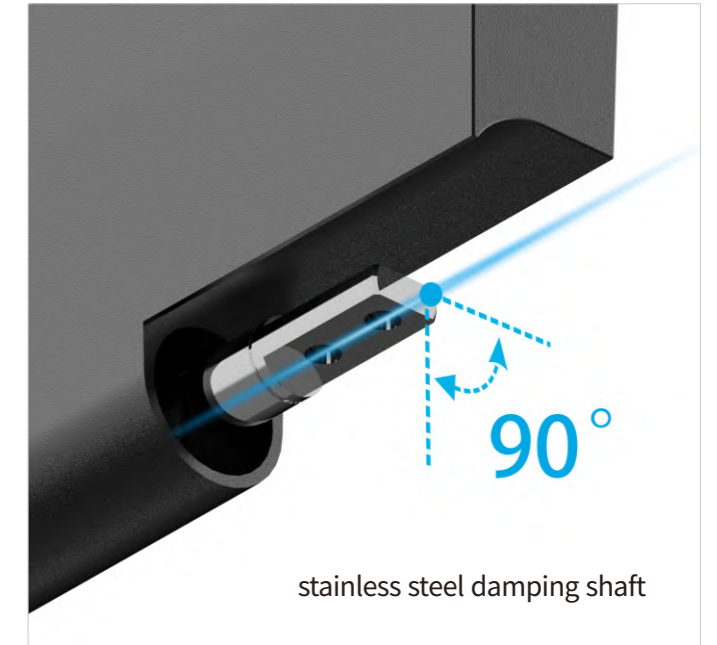
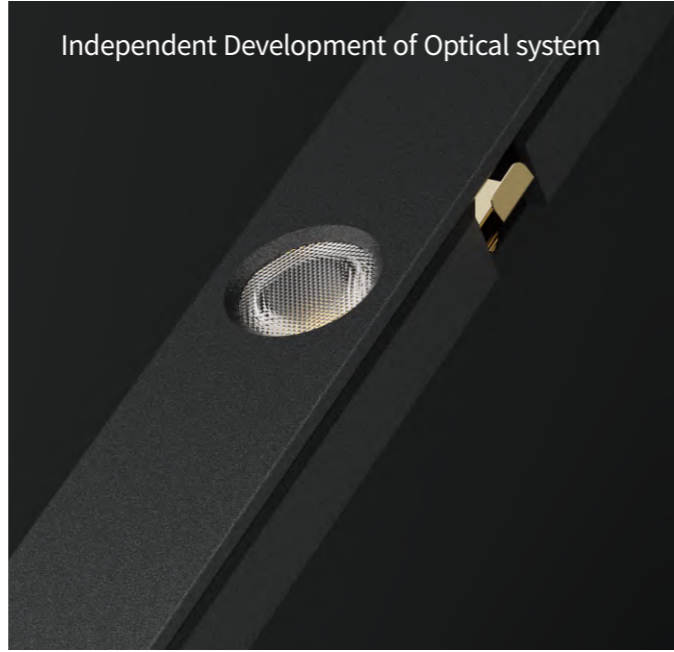




# M15-FL Line Flood Light




## PERFECT CONNECTION BETWEEN THE TWO LAMP BODIES

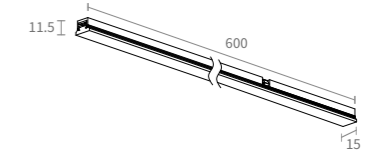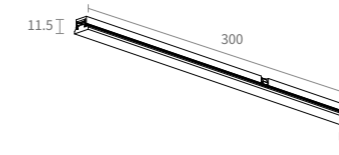


MODEL	M15-FL30	M15-FL60
POWER	6W	12W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE	110°	
LUMINOUS FLUX (24° 3000K)	160lm	320lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	

M15-FL30 110° 3000K

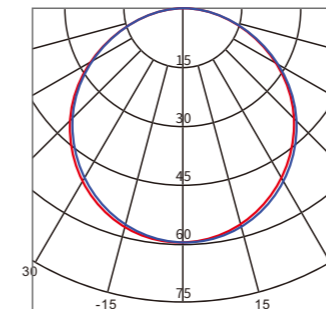

M15-FL60 110° 3000K

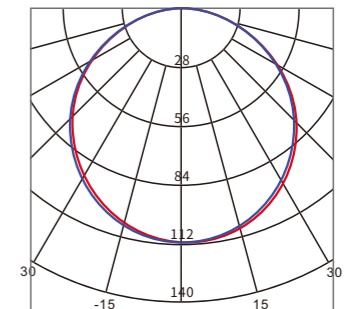









## M15-GL Dot Light



MODEL	M15-GL06	M15-GL12
POWER	6W	12W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE	 36°	 45°
LUMINOUS FLUX (24° 3000K)	483lm	966lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	

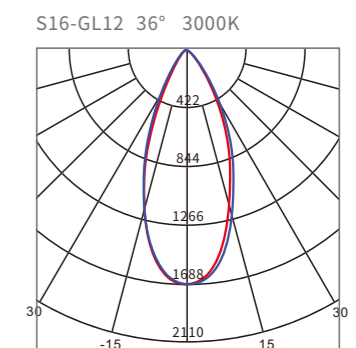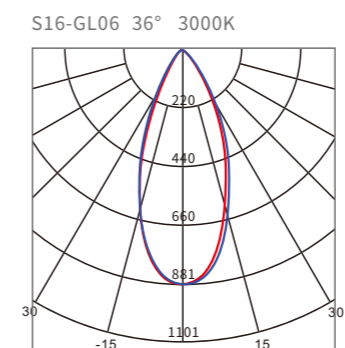










### M15-CG Spot Anti-Glare Grille




MODEL	M15-CG06	M15-CG12
POWER	6W	12W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE	 36°	 45°
LUMINOUS FLUX (24° 3000K)	408lm	821lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	


S16-CG06 36° 3000K

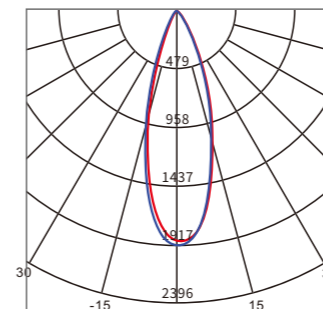

S16-CG12 36° 3000K

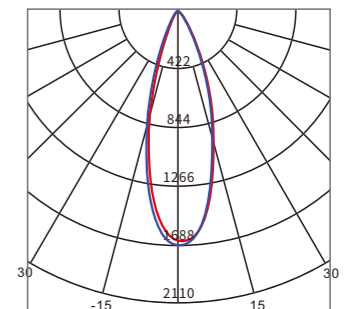




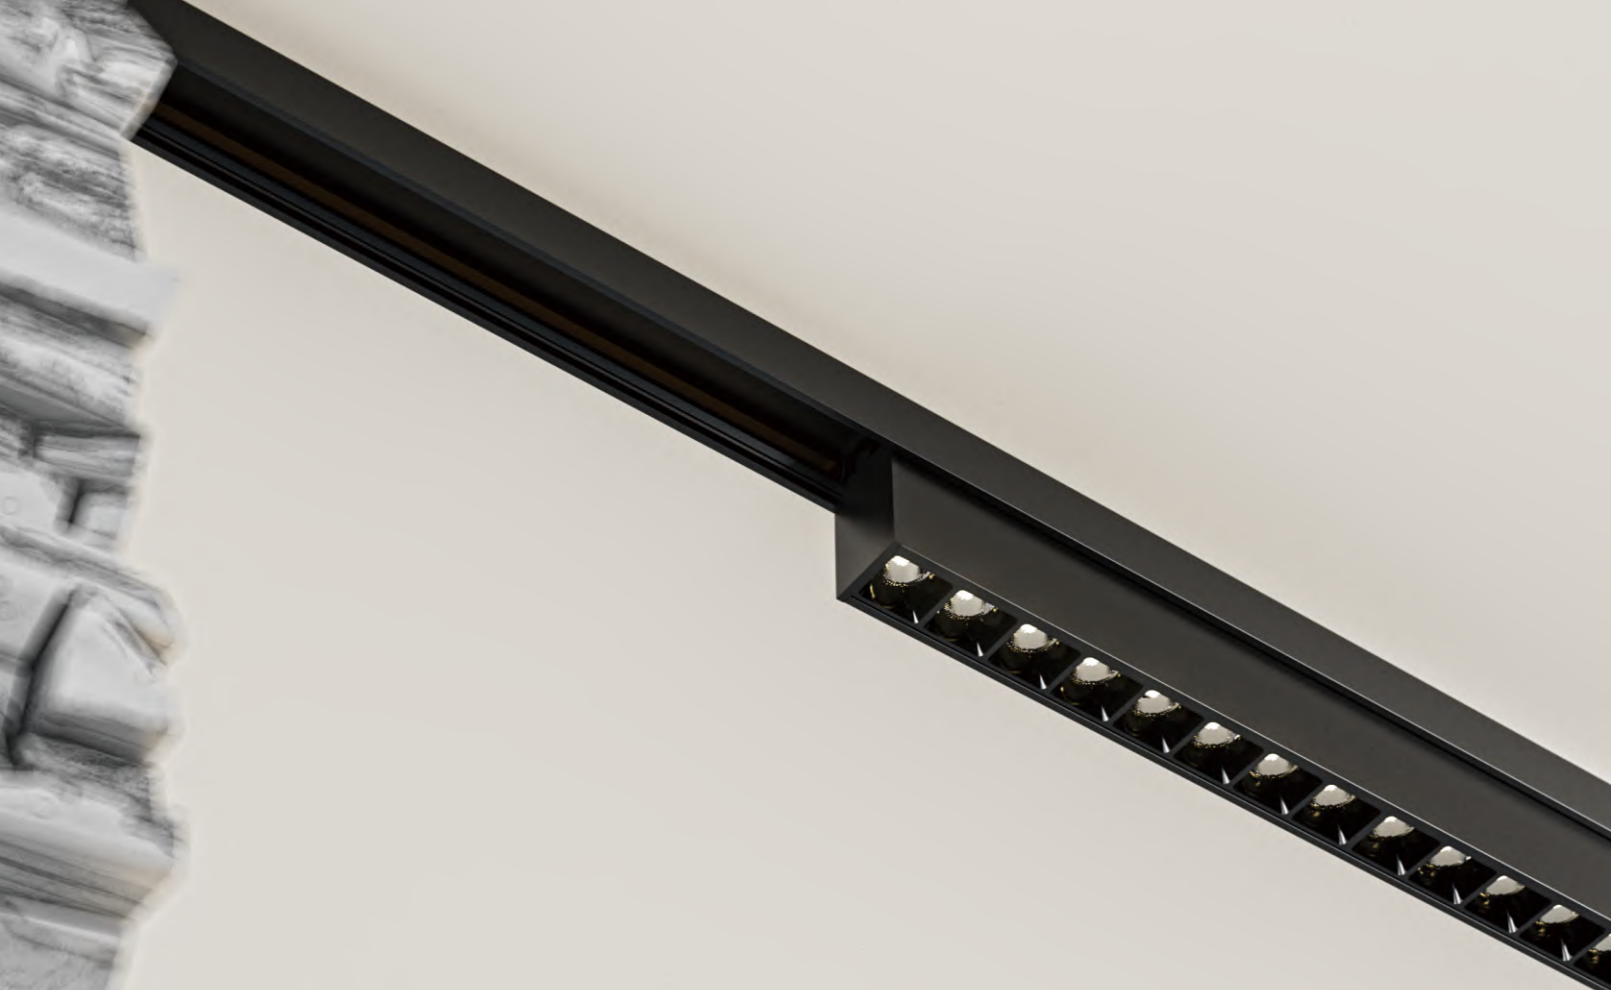


## M15-GO Darklight Linear Grille Light



NEW
CRI>90
RS>50



Risk0
850°
IP20

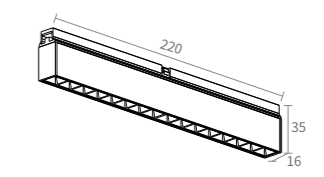

MODEL	M15-GO08	M15-GO16
POWER	8W	16W
VOLTAGE	48VDC   36VDC   24VDC	48VDC
CCT	2700 K	3000 K
	4000 K	
BEAM ANGLE	24°	40°
LUMINOUS FLUX (24° 3000K)	648lm	1232lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	

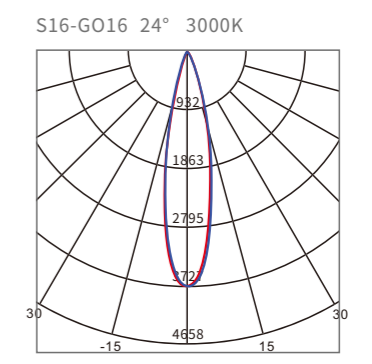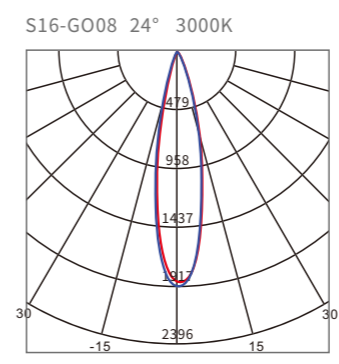



Intergrated Grille Diffuser



Ice Blue




Ruby Red




Black



Clear


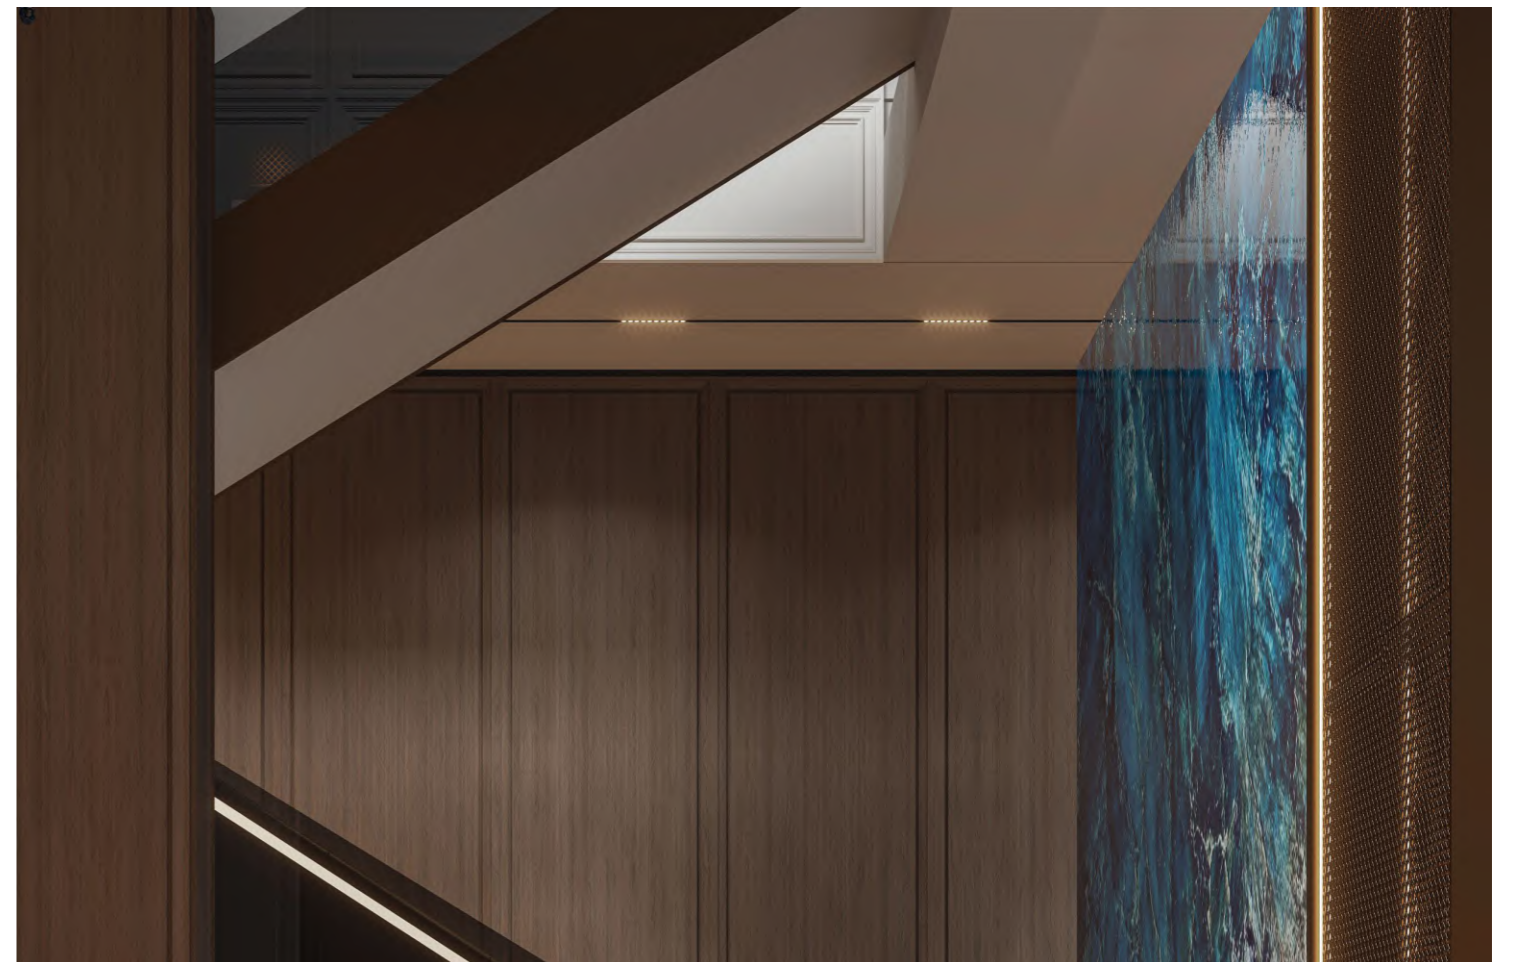


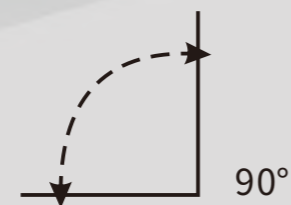



90 Degree adjustable grille light

## M15-AG Darklight flexx adjustable grille light


NEW
CRI>90 R9>50
✂
🏠
⚠
Risk0
850°
IP20

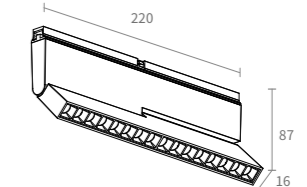

MODEL	M15-AG08	M15-AG16
POWER	8W	16W
VOLTAGE	48VDC   36VDC   24VDC	48VDC
CCT	2700 K	3000 K
	3000 K	4000 K
BEAM ANGLE	24°	40°
LUMINOUS FLUX (24° 3000K)	648lm	1232lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	

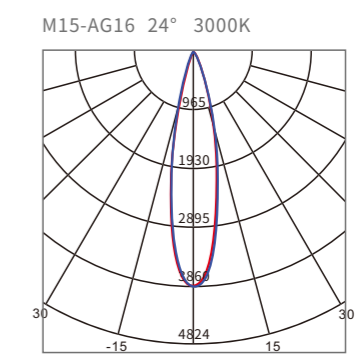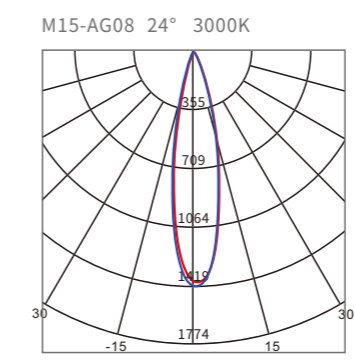



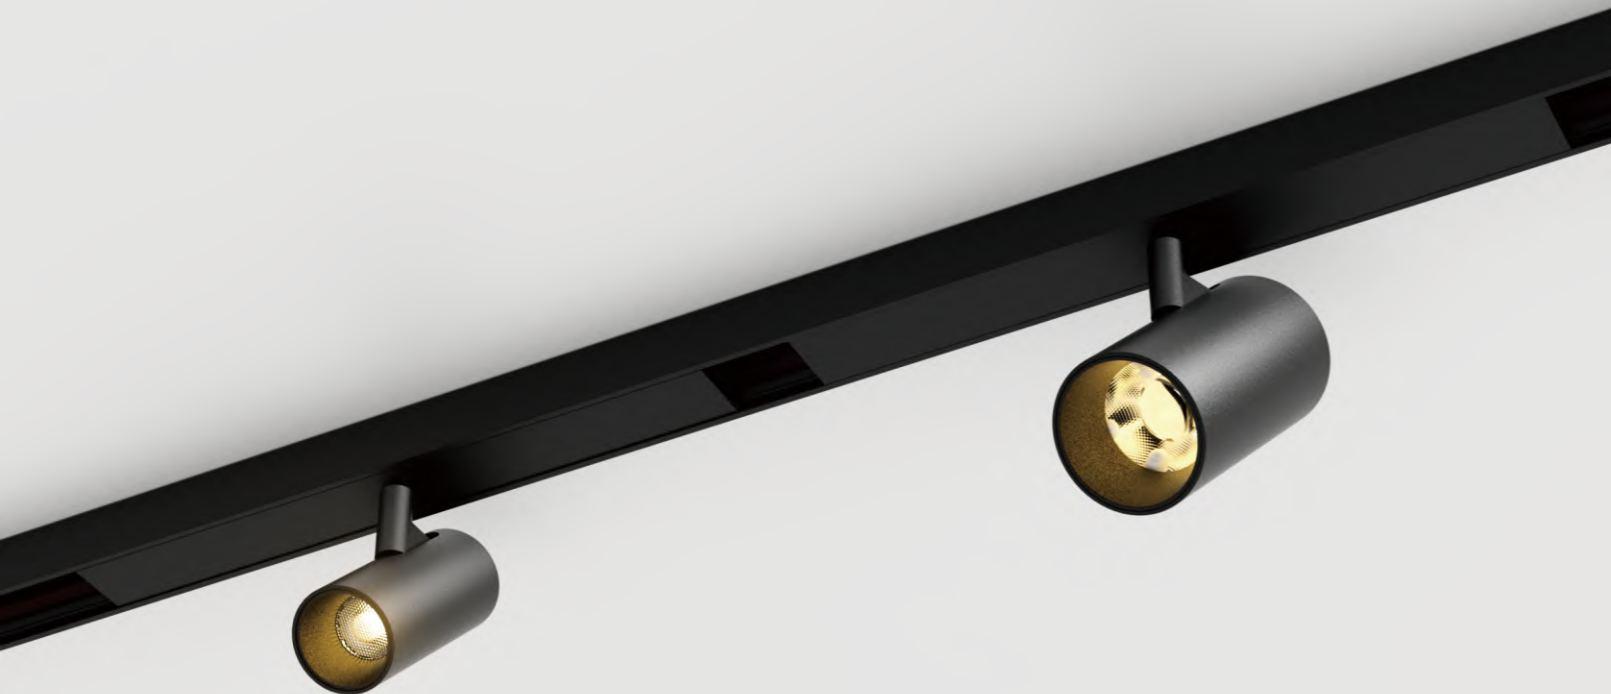


## M15-SP Spot




MODEL	M15-SP20	M15-SP30	M15-SP40
POWER	3W	5W	7W
VOLTAGE	48VDC   36VDC   24VDC		
CCT	2700 K	3000 K	4000 K
BEAM ANGLE	24°	36°	
LUMINOUS FLUX (24° 3000K)	200lm	326lm	684lm
FINISH	BLACK   WHITE		
CONTROL	ON/OFF		


M15-SP20 24° 3000K

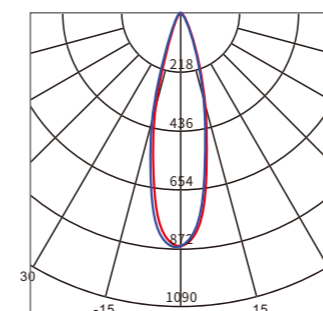


M15-SP30 24° 3000K

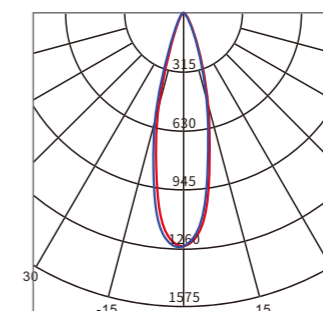


M15-SP40 24° 3000K

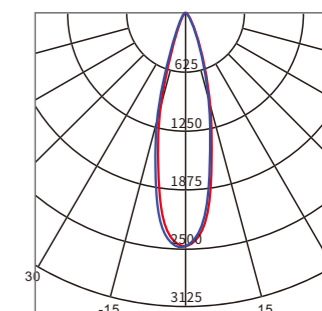






MODEL	M15-SP75
POWER	7W
VOLTAGE	48VDC   36VDC   24VDC
CCT	2700 K   3000 K   4000 K
BEAM ANGLE	24°   36°
LUMINOUS FLUX (24° 3000K)	684lm
FINISH	BLACK   WHITE
CONTROL	ON/OFF

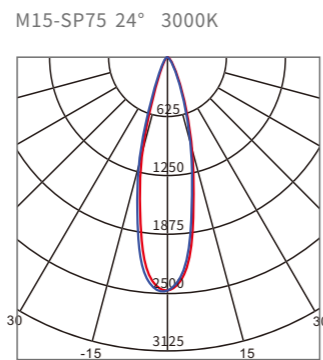

Horizontal Position 355 degrees rotation  
 Vertical 0 degree to 90 degree adjustable  
 Modelling arbitrary created


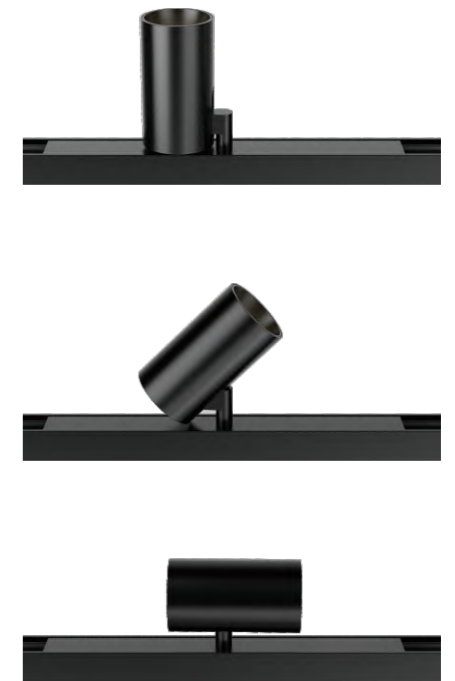











## M15-Double Spot





MODEL	M15-DS20	M15-DS30
POWER	2*3W	2*5W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE	 24°	 36°
LUMINOUS FLUX (24° 3000K)	398lm	613lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	


M15-DS20 24° 3000K

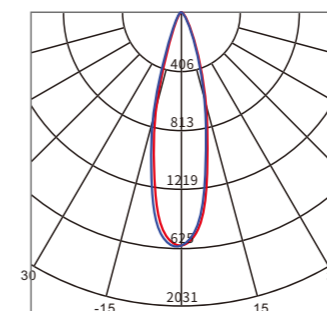

M15-DS30 24° 3000K

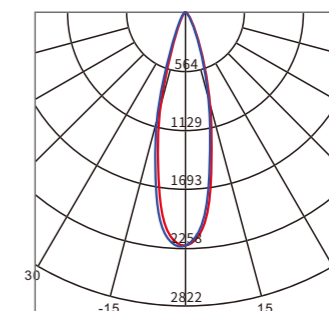

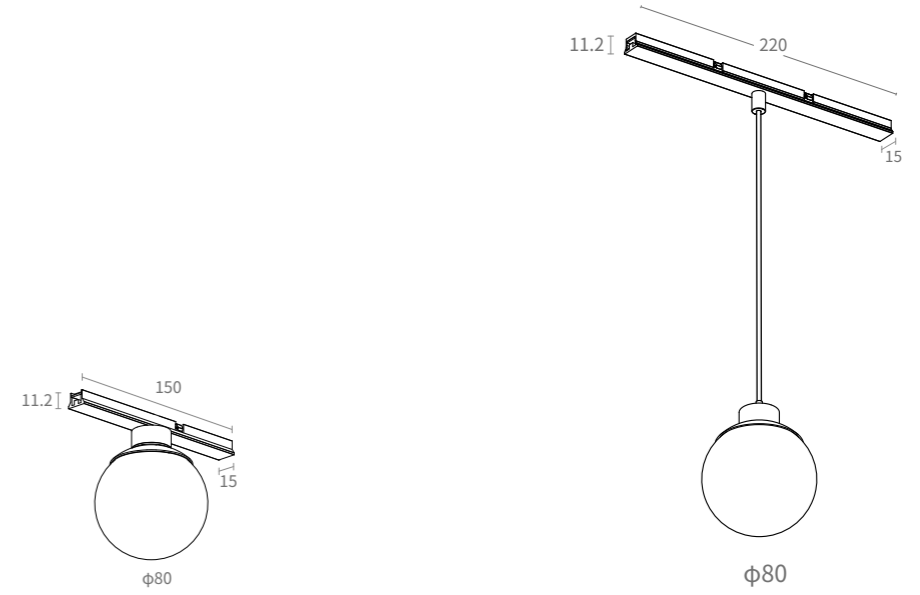

<b>MODEL</b>	M15-LG80	M15-LGS80
<b>POWER</b>	4W	4W
<b>VOLTAGE</b>	48VDC   36VDC   24VDC	
<b>CCT</b>	2700 K	3000 K   4000 K
<b>BEAM ANGLE</b>	 80°	
<b>LUMINOUS FLUX (24° 3000K)</b>	200lm	200lm
<b>FINISH</b>	BLACK   WHITE	
<b>CONTROL</b>	ON/OFF	



## M15-LG Globe










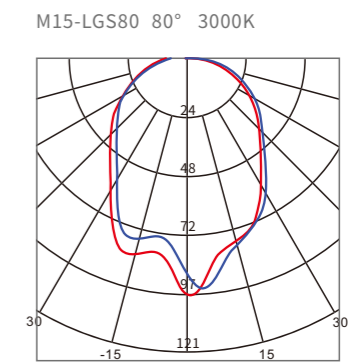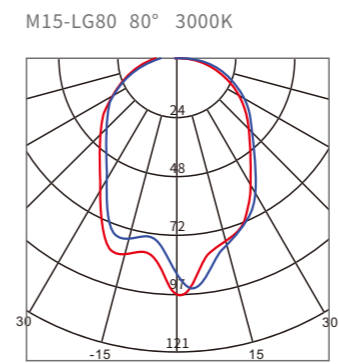


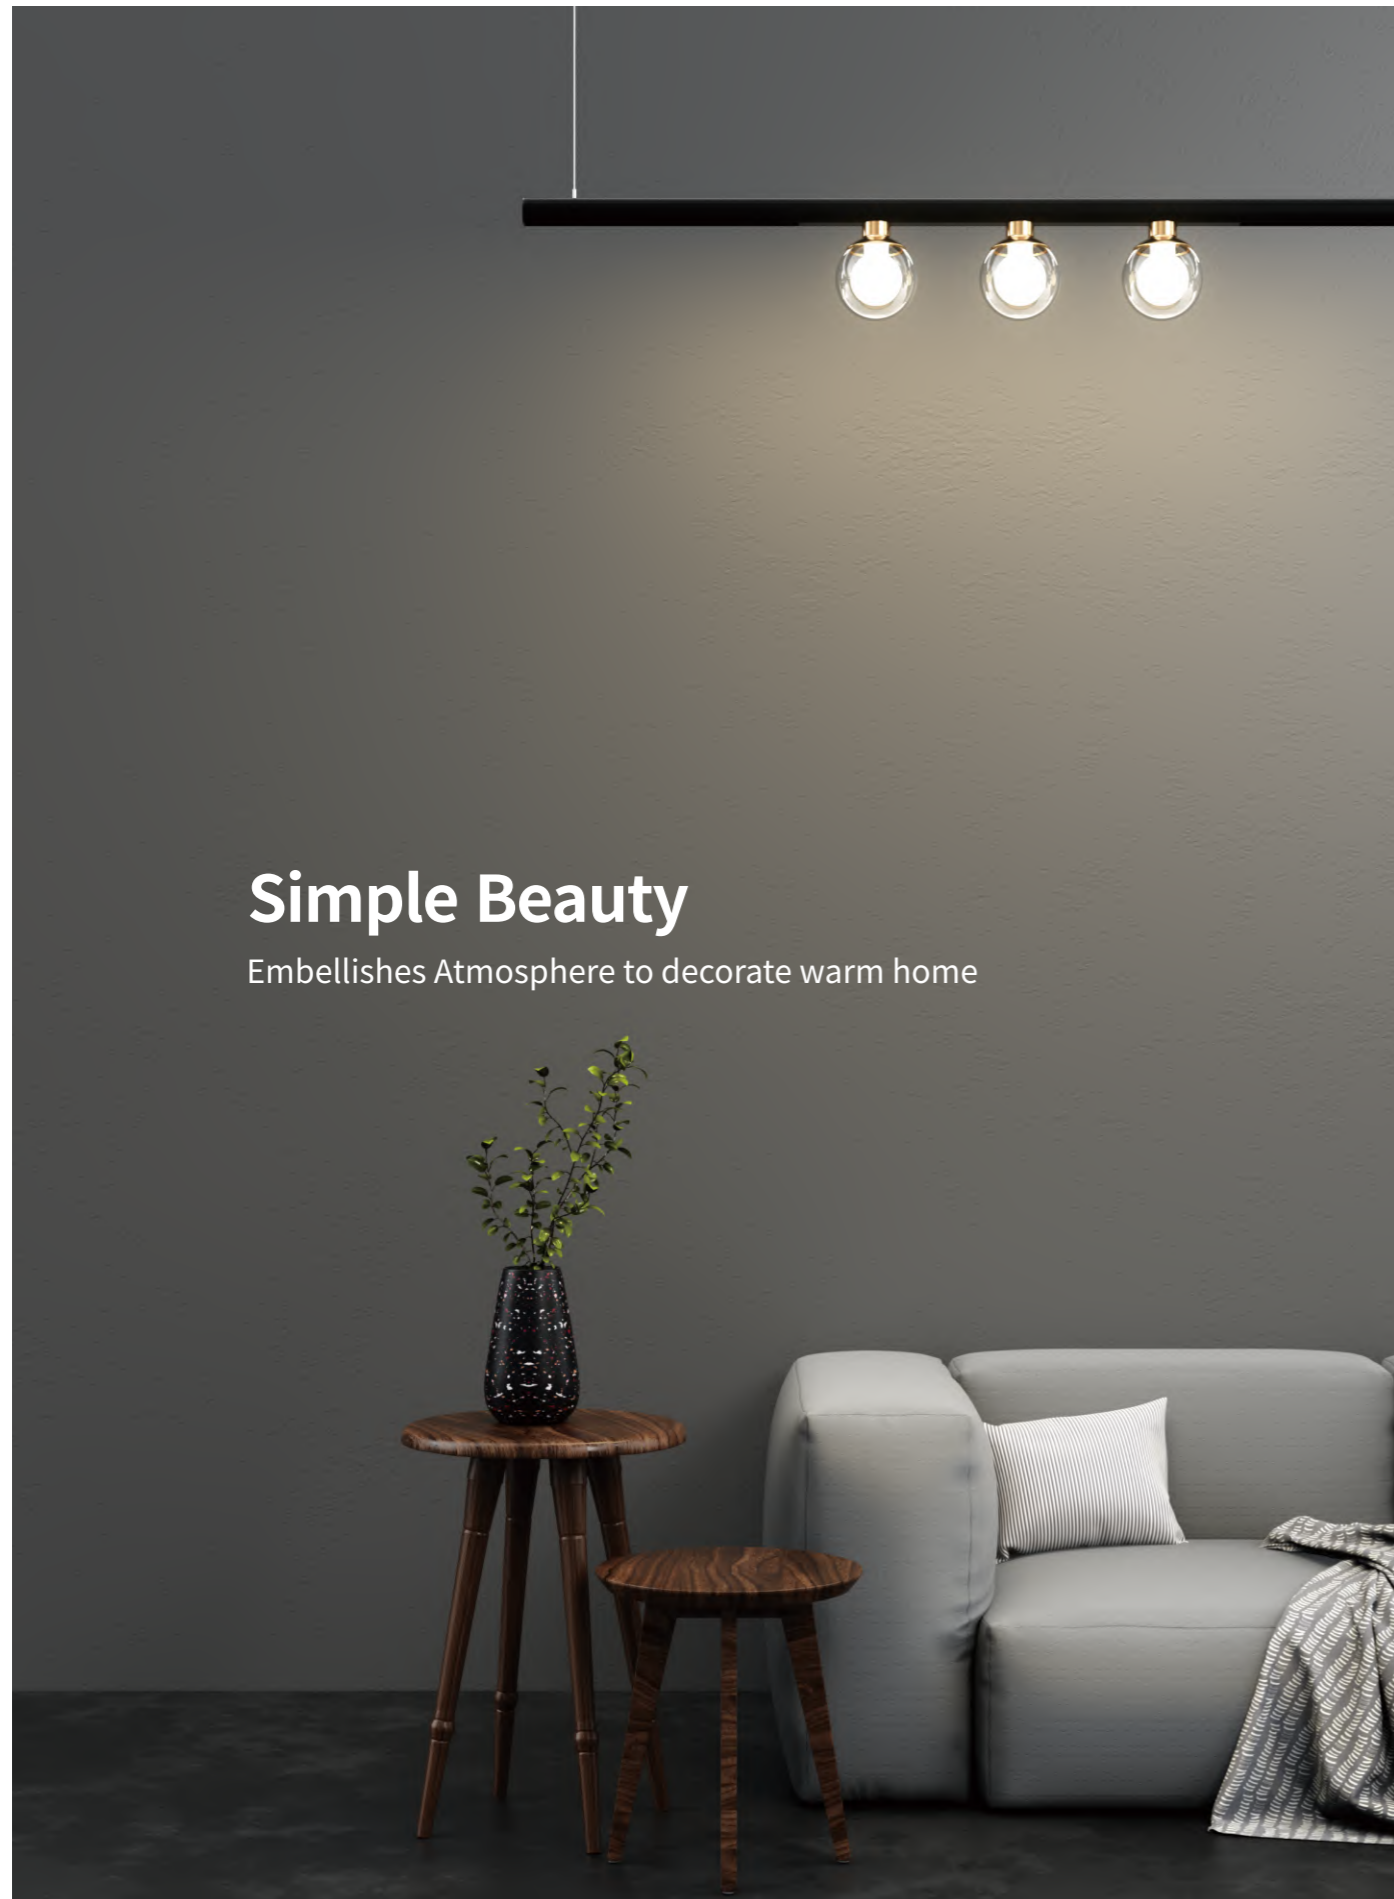

## Simple Beauty

Embellishes Atmosphere to decorate warm home



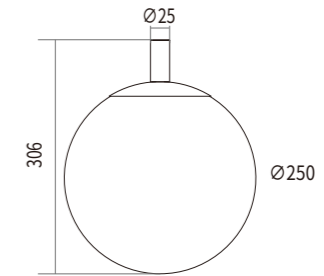



MODEL	M15-SU01
POWER	5W
VOLTAGE	48VDC   36VDC   24VDC
CCT	2700 K   3000 K   4000 K
BEAM ANGLE	330°
LUMINOUS FLUX (24° 3000K)	684lm
FINISH	BLACK   WHITE
CONTROL	ON/OFF

## M15-SU Sphere





# M15-SU Pendant Lamp




MODEL	M15-SU02	M15-SU03
POWER	6W	6W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE	24°	40°
LUMINOUS FLUX (24° 3000K)	352lm	352lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	






# M15-SU04 Pendant lamp



MODEL	M15-SU04
POWER	8W
VOLTAGE	48VDC   36VDC   24VDC
CCT	2700 K   3000 K   4000 K
BEAM ANGLE	24°   40°
LUMINOUS FLUX (24° 3000K)	420lm
FINISH	BLACK   WHITE
CONTROL	ON/OFF   PHASE   0-10V   DALI   BLUETOOTH


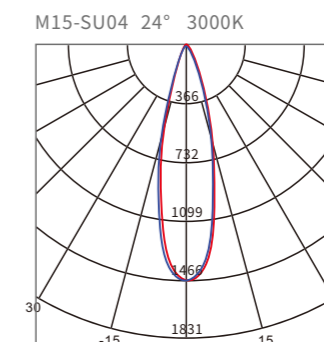
















# M15-RL Atmosphere

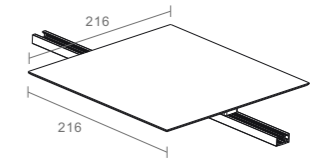


MODEL	M15-RL01	M15-RL02
POWER	5W	5W
VOLTAGE	48VDC   36VDC   24VDC	
CCT	2700 K	3000 K   4000 K
BEAM ANGLE		
LUMINOUS FLUX (24° 3000K)	352lm	352lm
FINISH	BLACK   WHITE	
CONTROL	ON/OFF	




# MT15 Space Application Combination

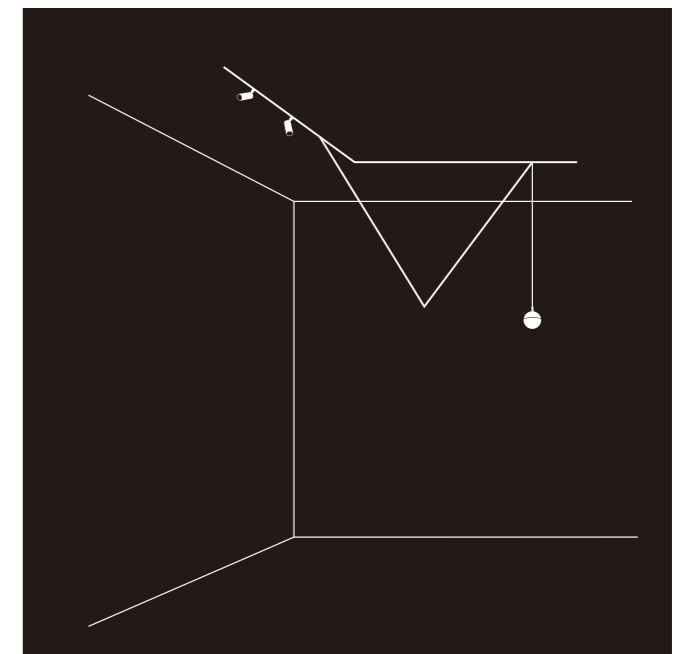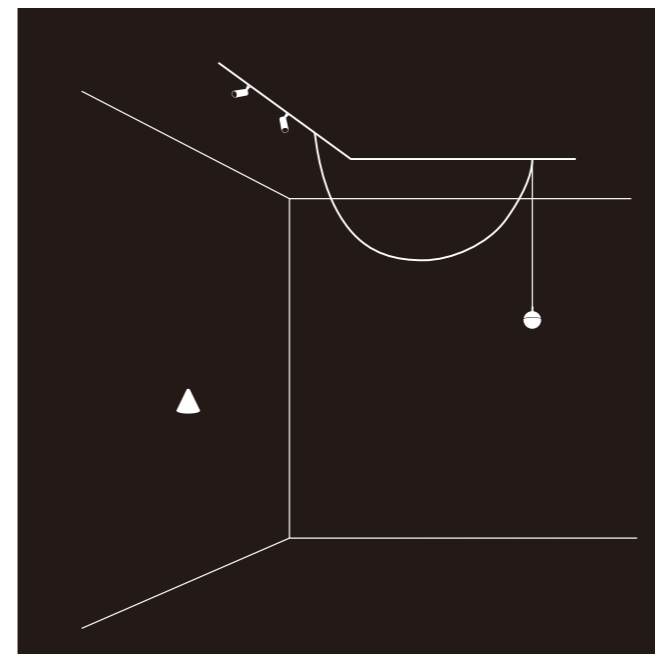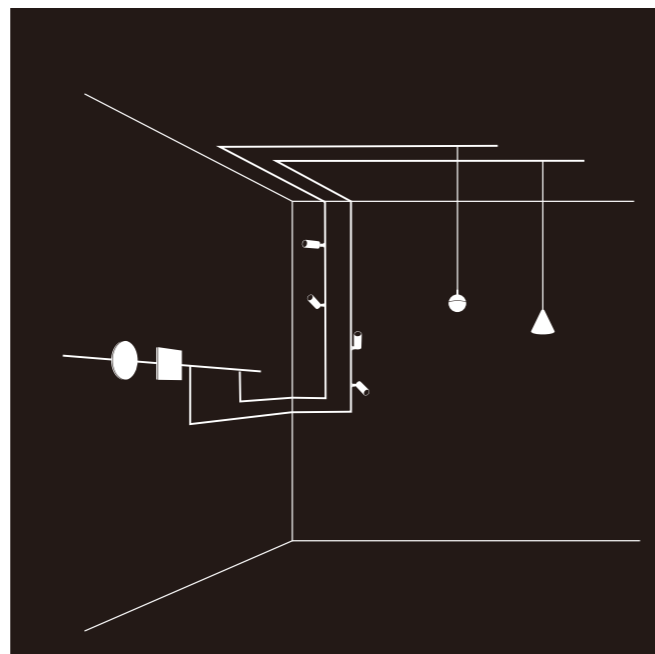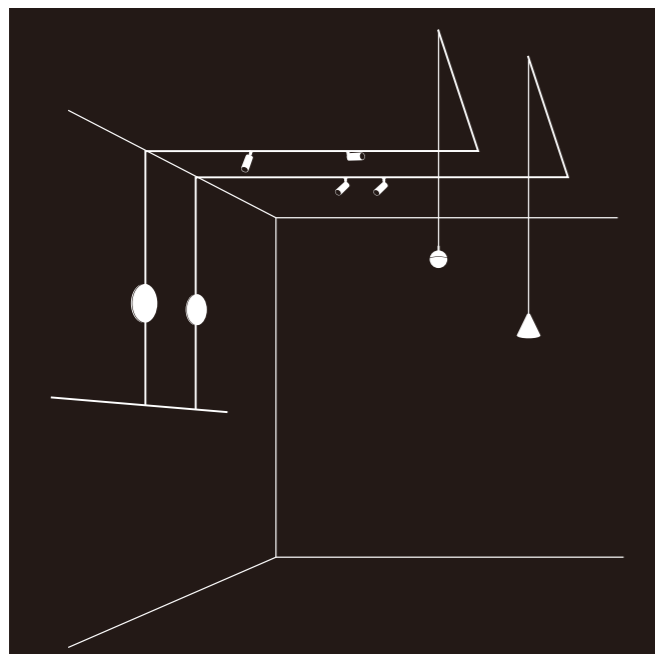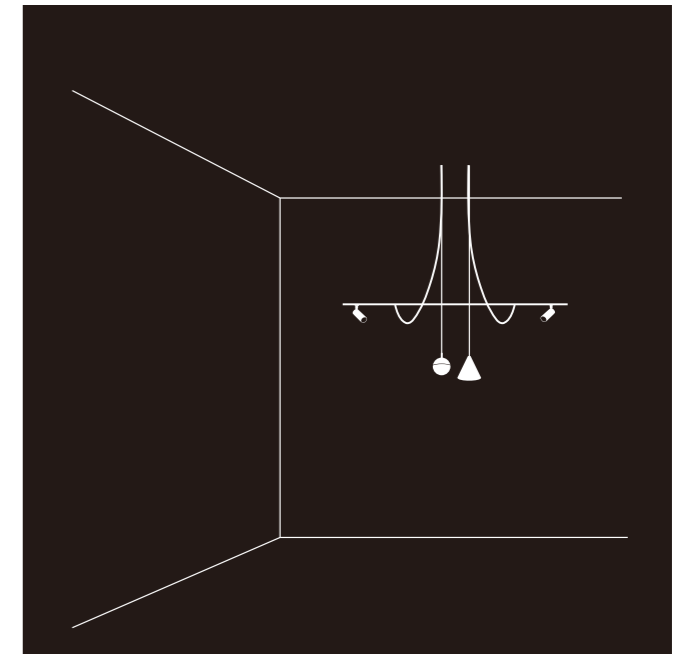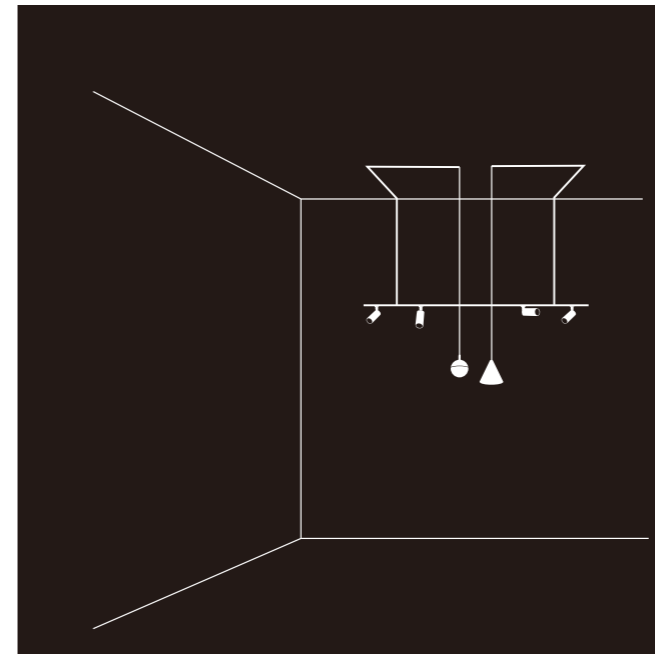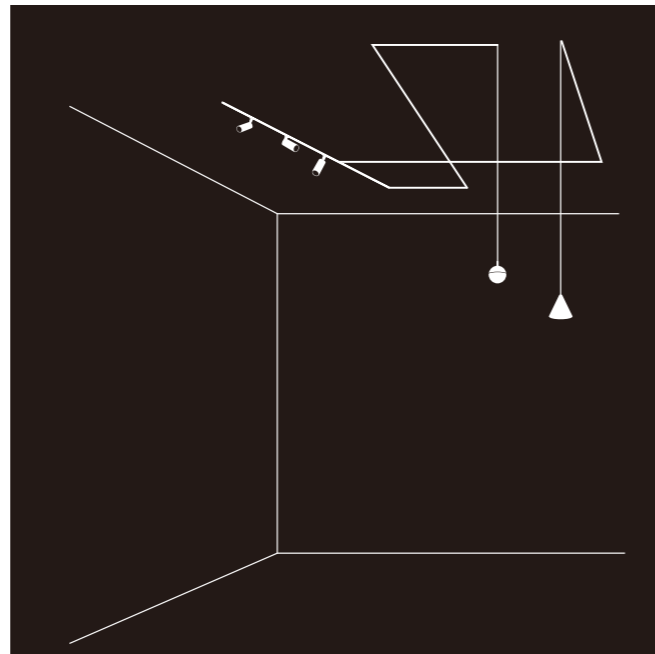
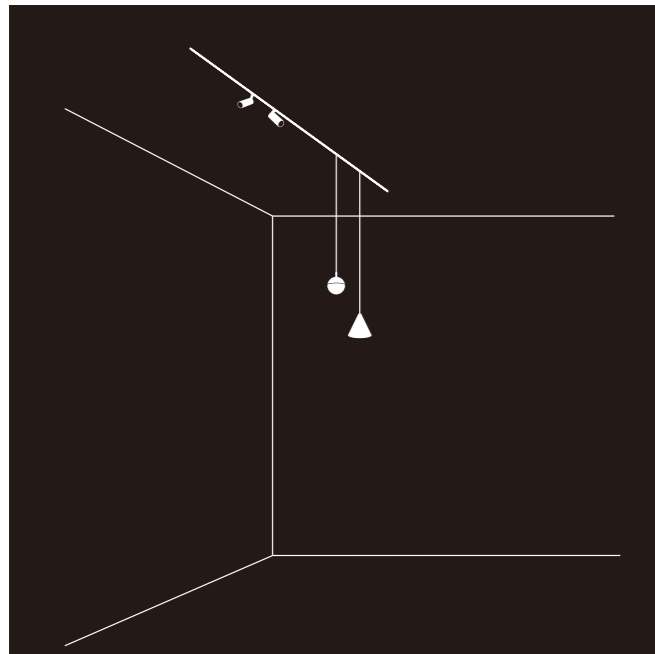


Channel Control Display

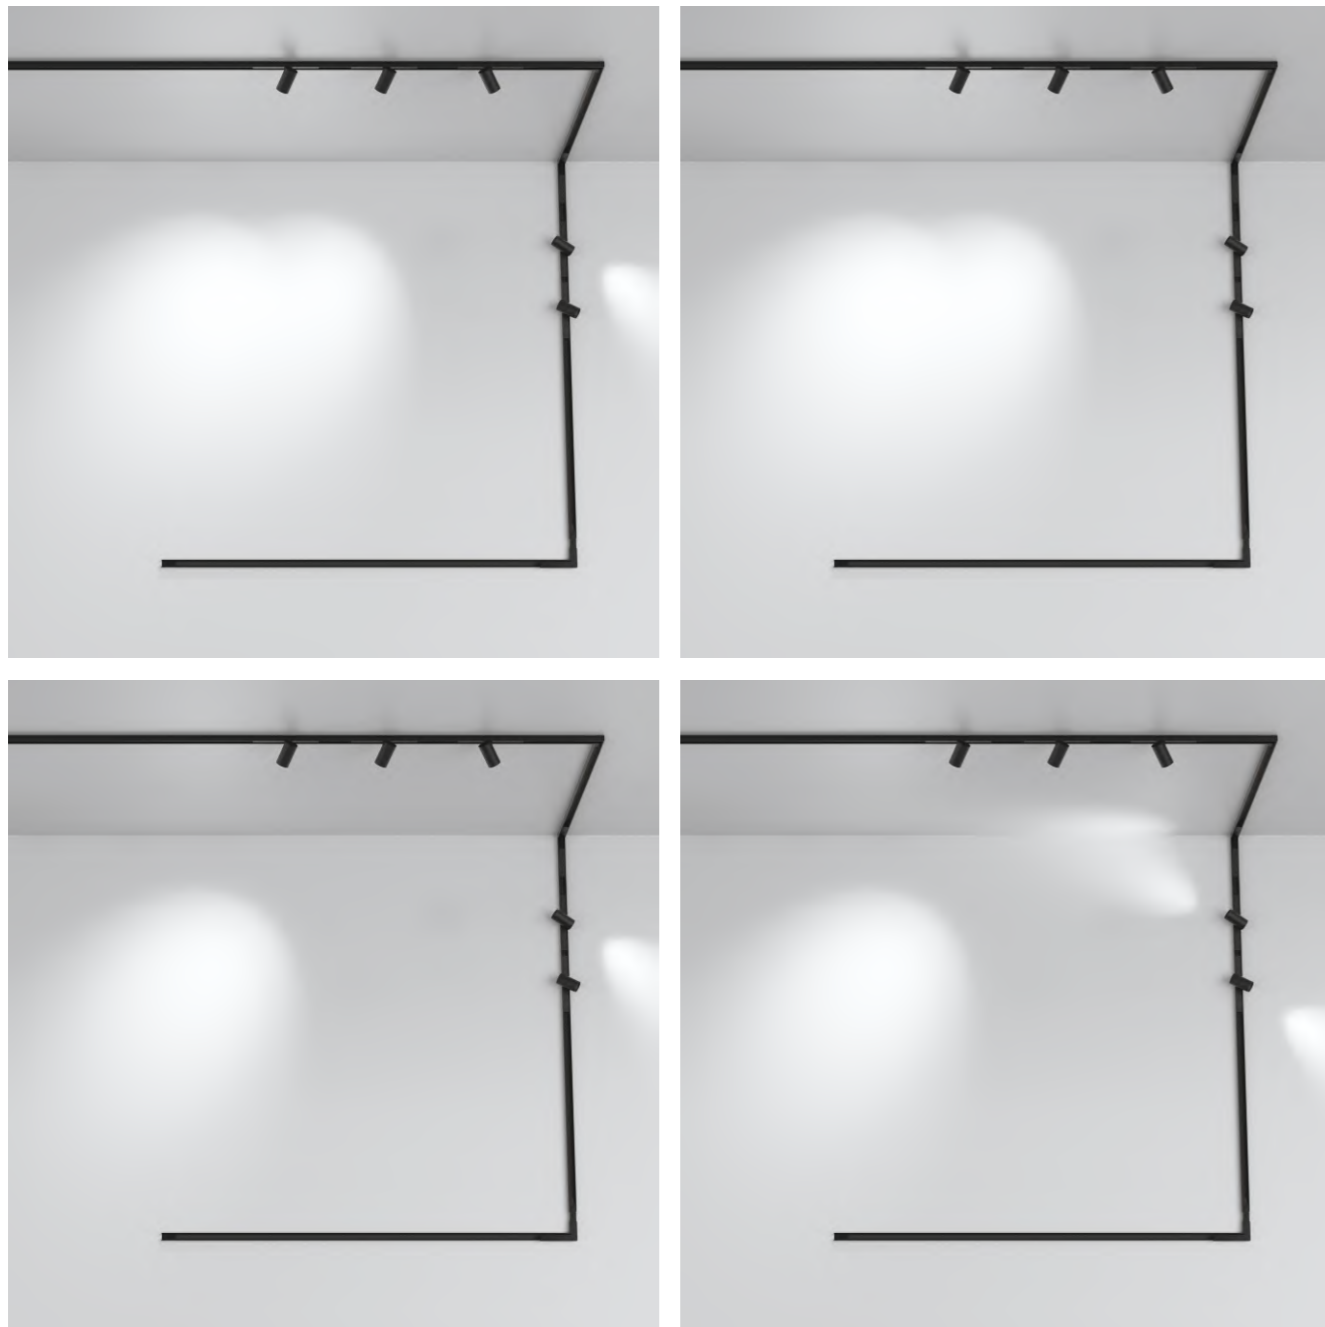

CCT changes Control Display

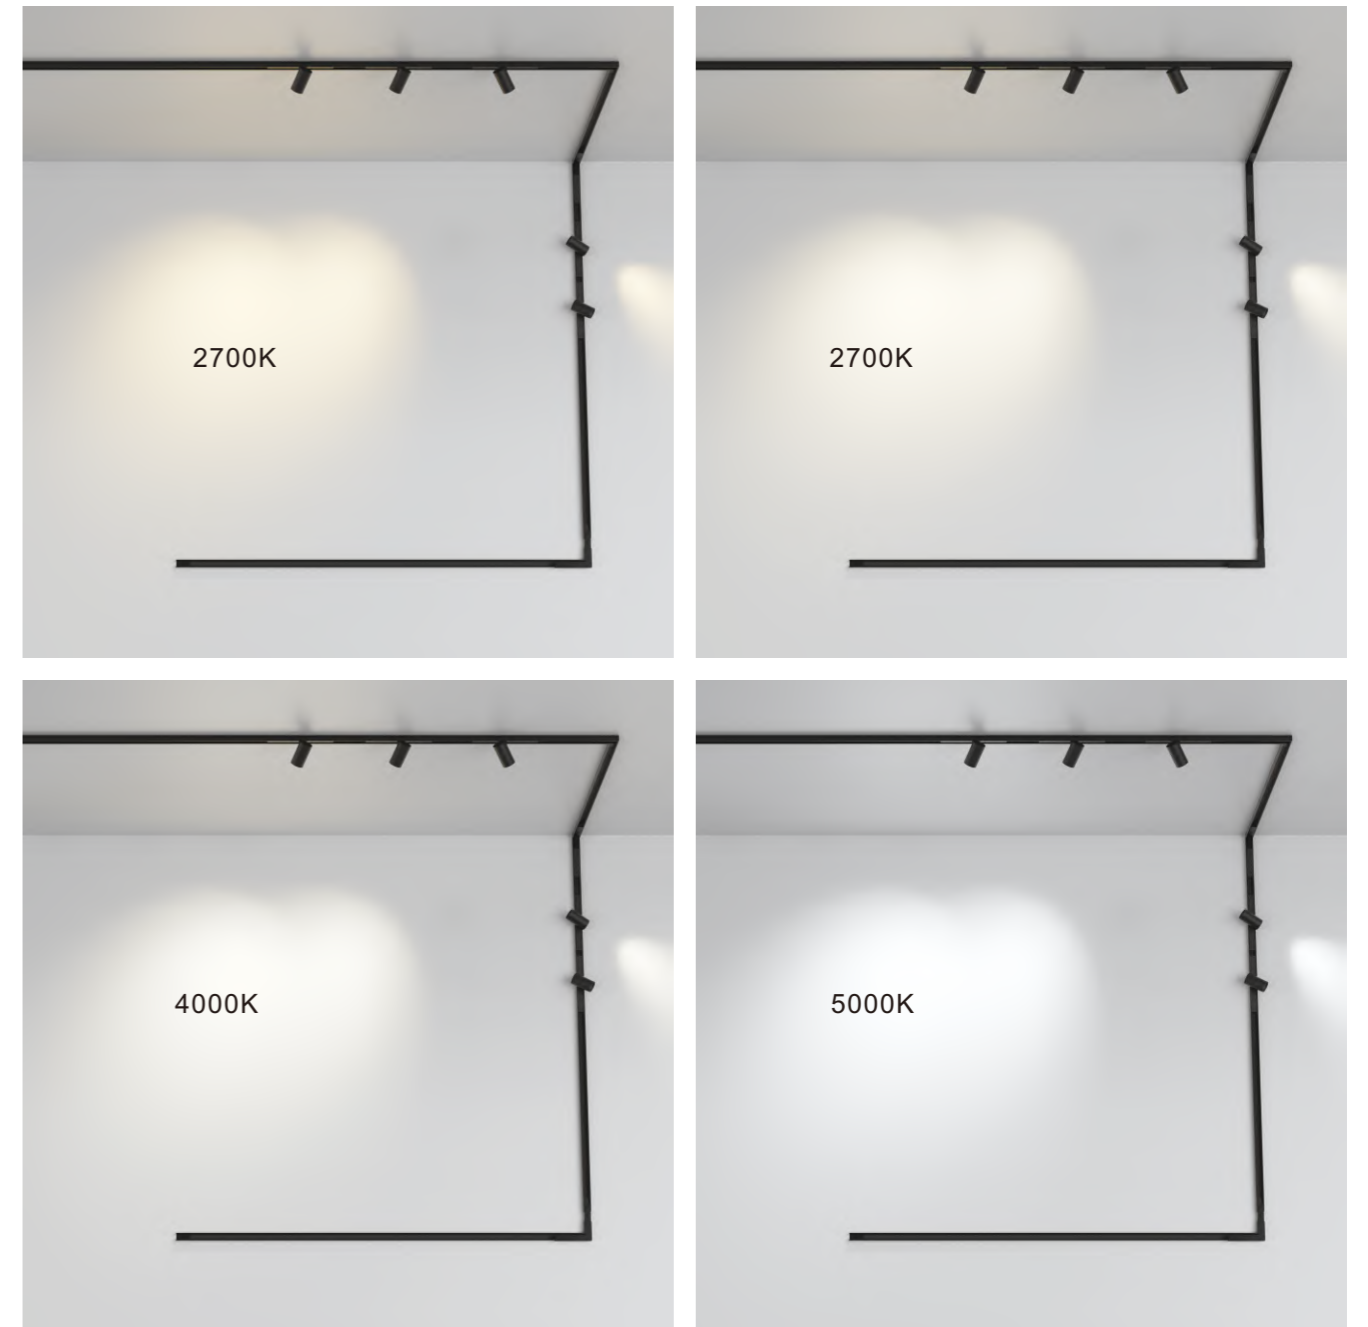

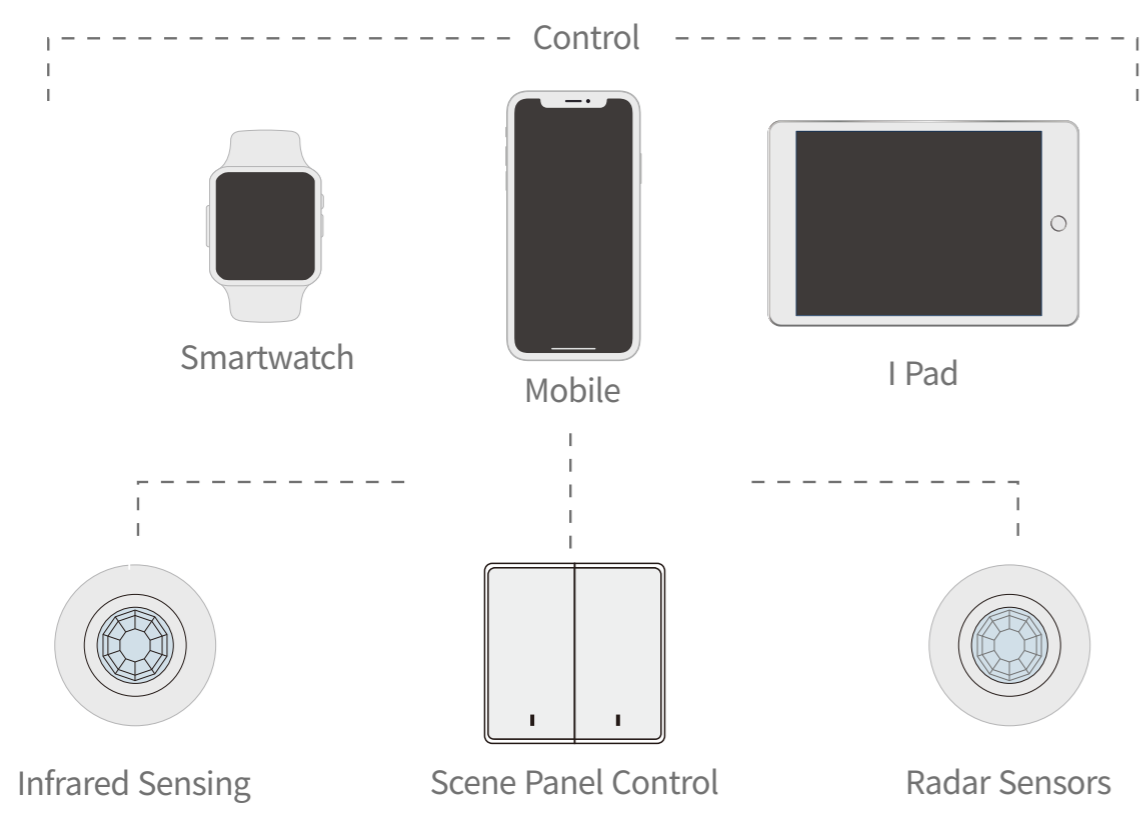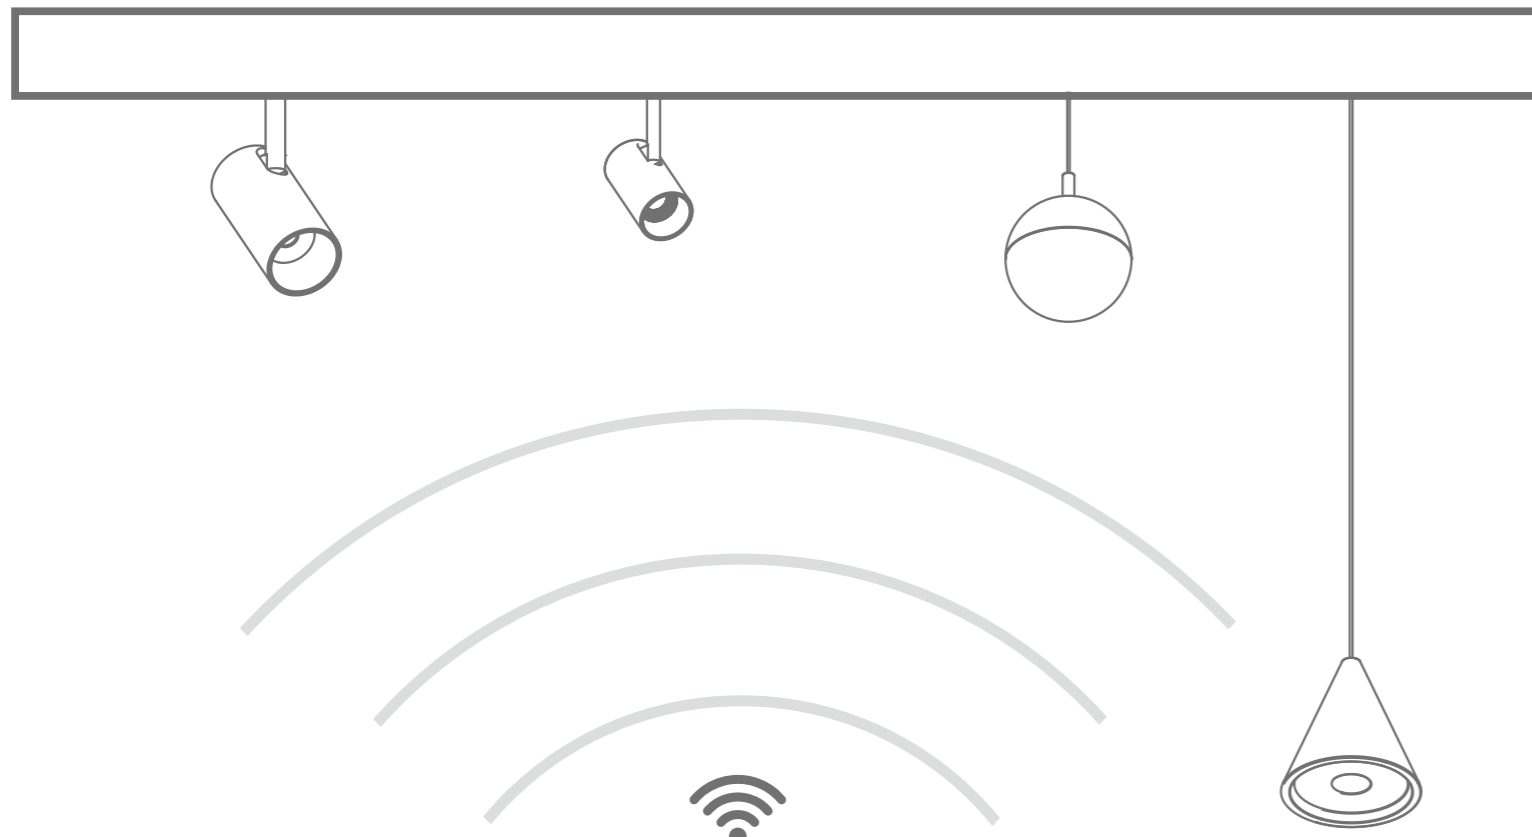

### Intelligent Control Wiring Mode

