



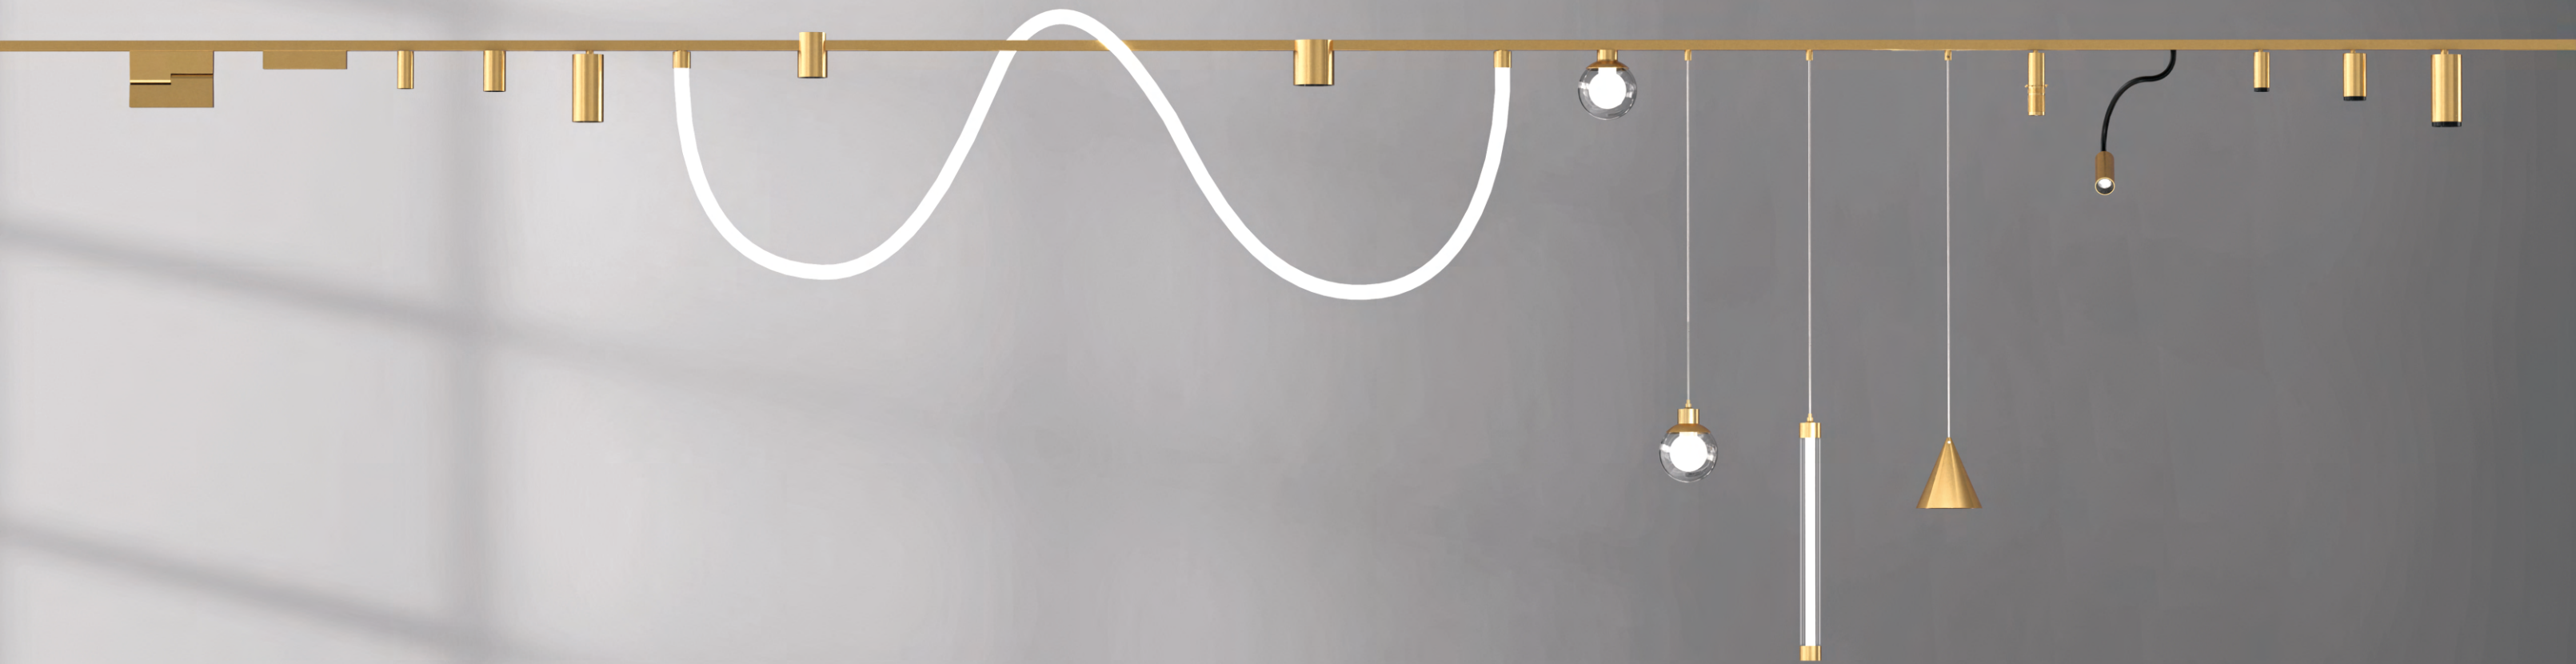

MT15[®]
Ultra- Thin Mini Magnet Track System

Ultra-Thin Magnet Lamp

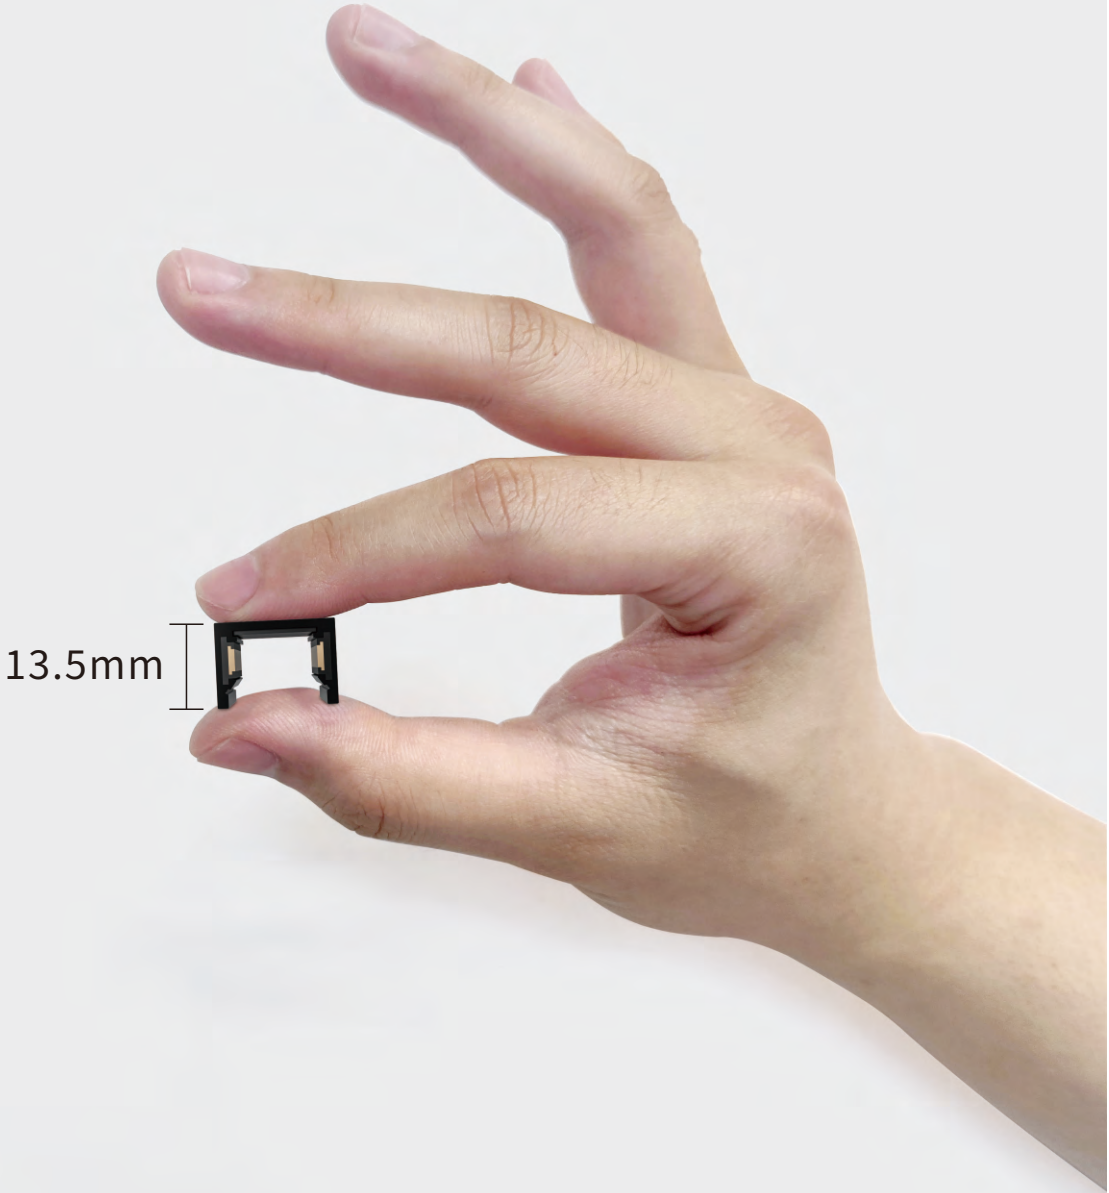

Ultra- Thin Mini
Magnet Track System
Track Rail Section


Four kinds of track rail




Track Standard Specification




Surface Mount









Recessed Mount

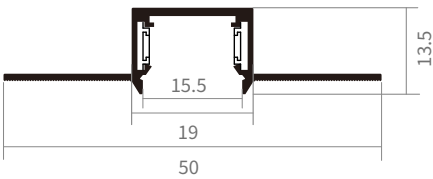

Pre-buried Mount

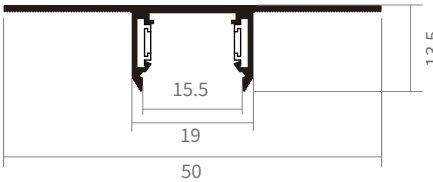

Round Hanging Mount

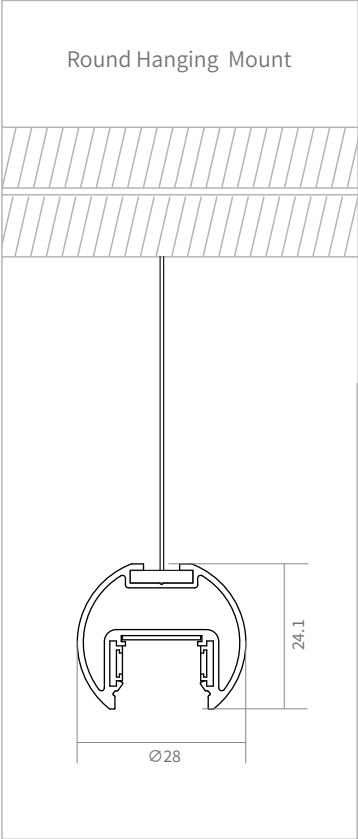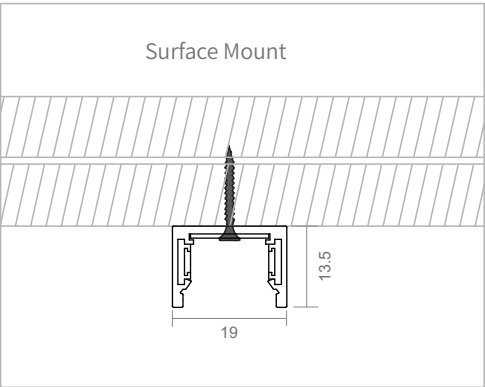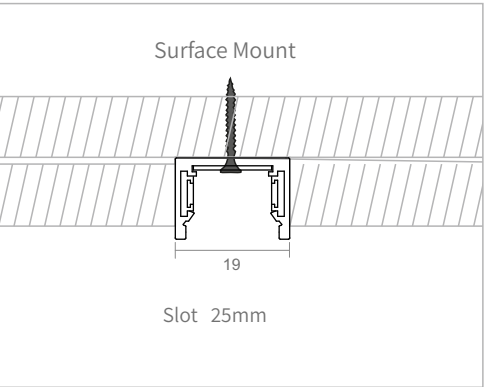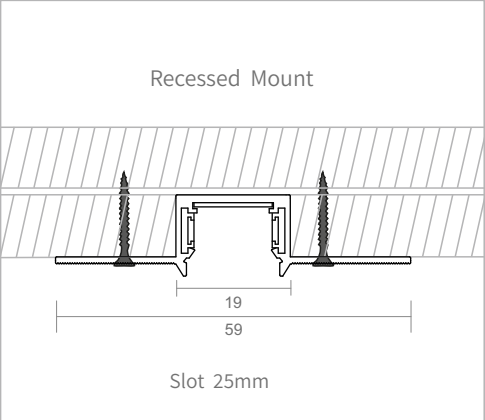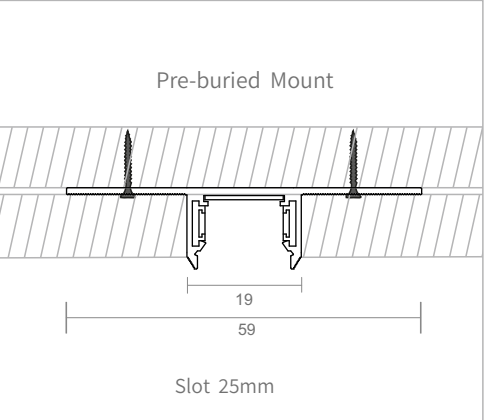



Surface Mount
color:black
Model : MT15-SSS



A Horizontal Corner Of Surface Mount
color:black
Model : CN15-SSSHO




B Horizontal Corner Energized connector
color:black
Model : AS15-JT04



C Inner corner Of Surface Mount
color:black
Model : CN15-SSSIN



D Flexible Energized connector
color:black
Model : AS15-JT03



Pre-buried Mount Black
color:black
Model : MT15-SPS



E Horizontal Corner Of Pre-buried Track
color:black
Model : CN15-SPSHO



B Horizontal Corner Energized connector
color:black
Model : AS15-JT04



F Inner Corner Of Pre-buried Track
color:black
Model : CN15-SPSIN




D Flexible Energized connector
color:black
Model : AS15-JT03

★The Splicing Method Recessed Track Is The Same As Pre-buried Track, when Splicing, The Corresponding Accessories Can Be Stated According To Their Marks.



Recessed Mount Black
color:black
Model : MT15-STS



E Horizontal Corner Of recessed track
color:black
Model : CN15-STSHO




B Horizontal Corner Energized connector
color:black
Model : AS15-JT04



F Inner Corner Of recessed track
color:black
Model : CN15-STSIN



D Flexible Energized connector
color:black
Model : AS15-JT03



Round Suspended Track
Color:black
Model:MT15-RSS



A Horizontal Corner Of
Round Suspended Track

Color:black
Model:CN15-RSSH0



B Horizontal Corner
Energized connector

Color:black
Model:AS15-JT04



Ultra-thin Mini
Magnet Track System
Lamp Module



A Grille Linear Light
M15-GL06;M15-GL12



B Flood Linear Light
M15-FL30;M15-FL60



C Anti-glare GrilleLight
M15-CG06;M15-CG12



D Adjustable Grille Light
M15-AG08;M15-AG16



E Grille Light
M15-GO08;M15-GO16



F Global Light
M15-LG80;M15-LGS80



G Spotlight
M15-SP20;M15-SP30
M15-SP40;



M Conical pendant light
M15-SU04






MT15 Series

Flood Linear Light

M15-FL30;M15-FL60;

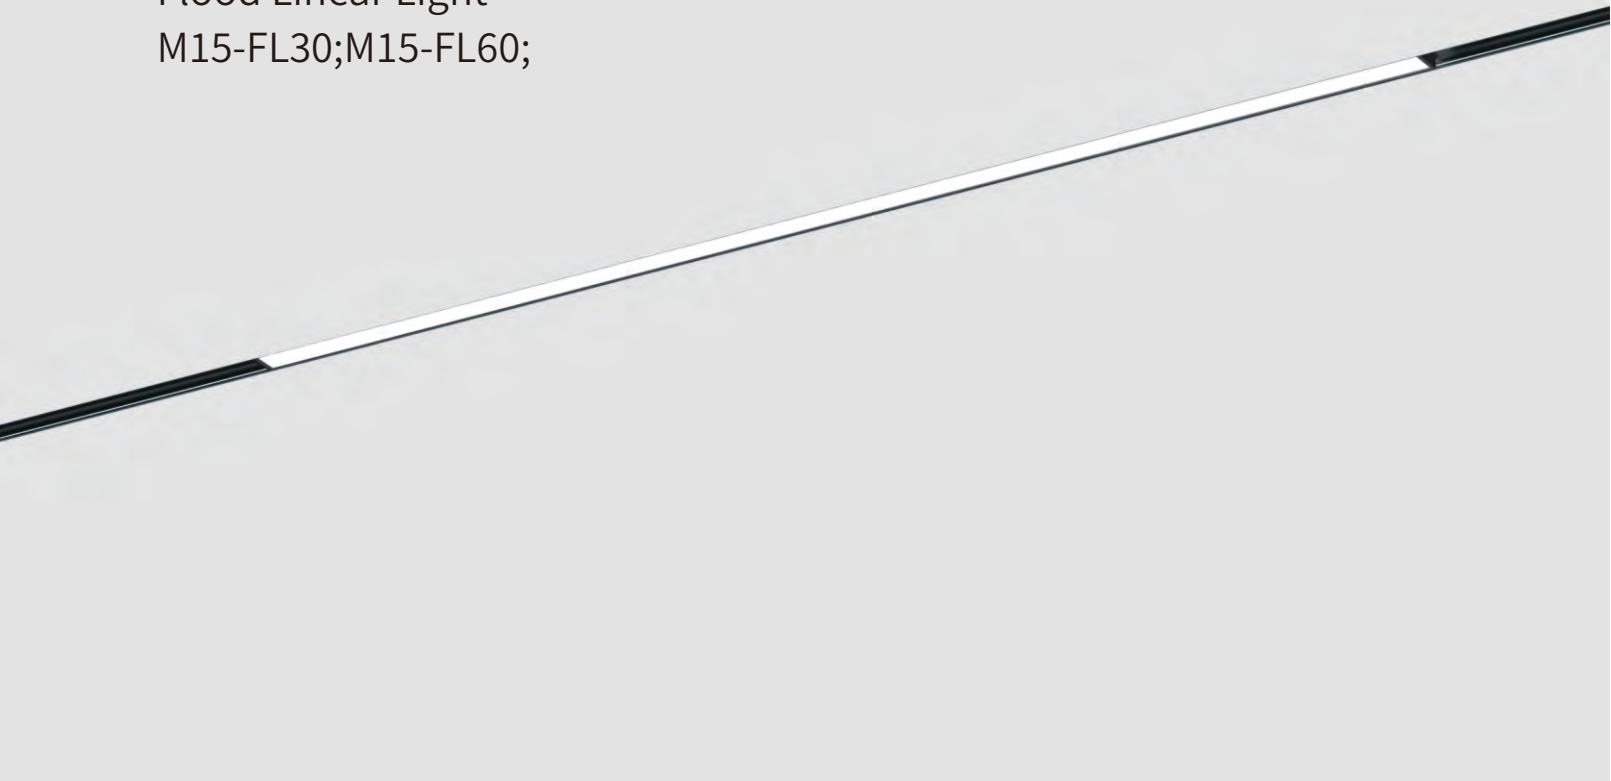

Standard configuration

COLOUR TEMPERATURE
3000K
3500K
4000K
CONTROL
ON/OFF
Beam angle
110°
COLOUR(housing)
Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
6W	48V/24V	3000K/3500K/4000K	600 lm(110° 3000K)
12W	48V/24V	3000K/3500K/4000K	1200lm(110° 3000K)

LUMINOUS FLUX

BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

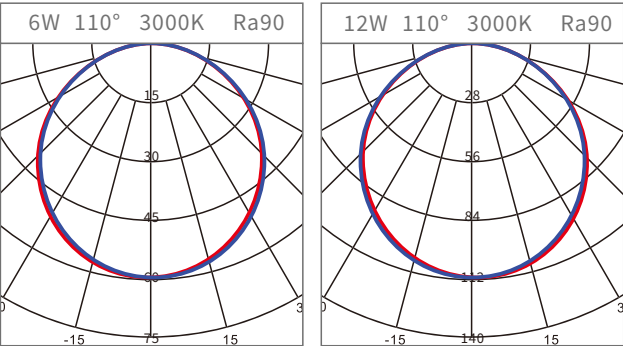

Quickinfo

GENERAL
Magnetic suction installation
IP20
LED
BRIDGELUX
6W,12W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3
OPTICAL
Direct illumination
Beam angle 110°
Optical accessories
ELECTRICAL
ON/OFF,Tuya Zigbee
0-10V,Phase DIM,DALI DIM
PHYSICAL
Aluminum



RoHS



Available Colors




White




Golden

Light effect

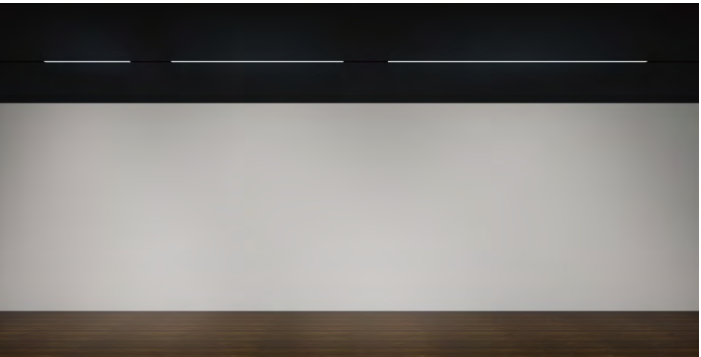

Technical drawing

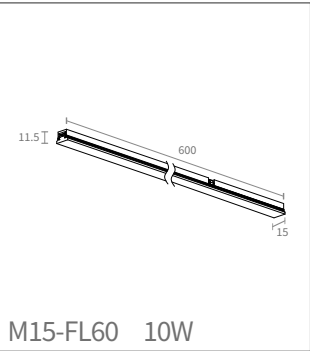

Physical photos



M15-FL30 5W



M15-FL60 10W

MT15 Series

Grille Linear Light
M15-GL06;M15-GL12



Standard configuration


COLOUR TEMPERATURE
3000K
3500K
4000K
CONTROL
ON/OFF
Beam angle
36°/45°
COLOUR(housing)
Black
White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
6W	48V/24V	3000K/3500K/4000K	483 lm(36° 3000K)
12W	48V/24V	3000K/3500K/4000K	966 lm(36° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

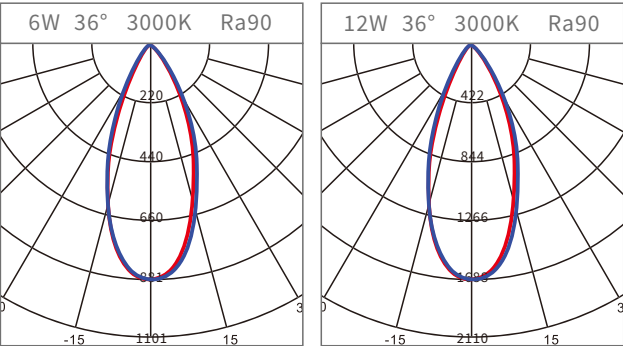

Quickinfo


GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 6W,12W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 36°/45° Optical accessories
ELECTRICAL
ON/OFF,Tuya Zigbee 0-10V,Phase DIM,DALI DIM
PHYSICAL
Aluminum




Physical photos




Available Colors

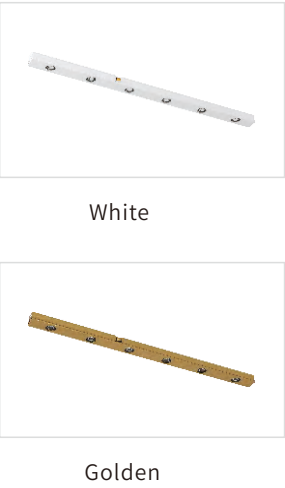

Light effect

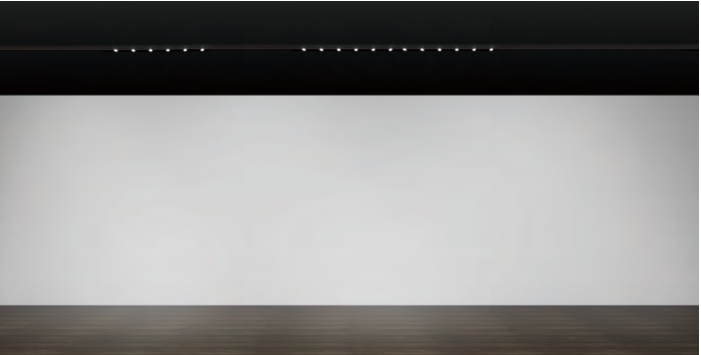

Technical drawing

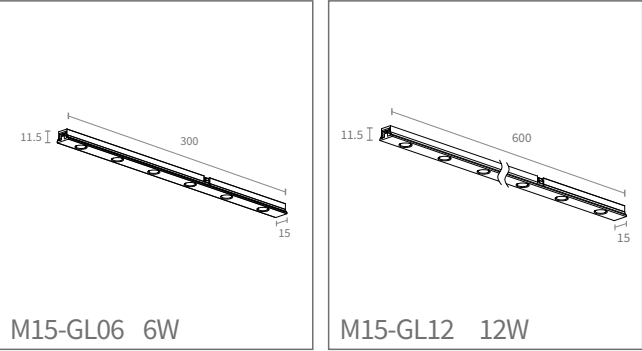

MT15 Series

Anti-glare GrilleLight
M15-CG06;M15-CG12



Standard configuration


COLOUR TEMPERATURE
3000K
3500K
4000K
CONTROL
ON/OFF
Beam angle
36°/45°
COLOUR(housing)
Black
White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
6W	48V/24V	3000K/3500K/4000K	408lm(36° 3000K)
12W	48V/24V	3000K/3500K/4000K	821 lm(36° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

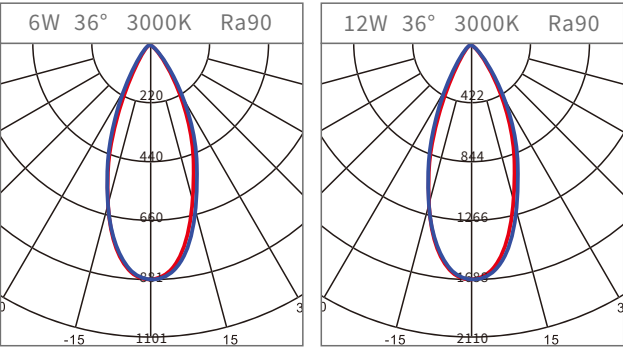

Quickinfo

GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 6W,12W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 36°/45° Optical accessories
ELECTRICAL
ON/OFF,Tuya Zigbee 0-10V,Phase DIM,DALI DIM
PHYSICAL
Aluminum



Physical photos



M15-CG06 6W



M15-CG12 12W

Available Colors




White




Golden


Light effect

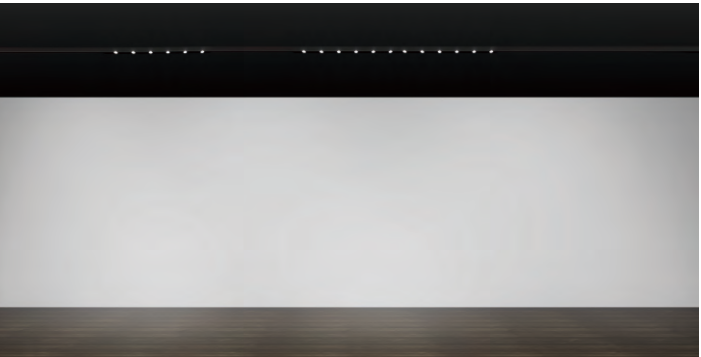

Technical drawing

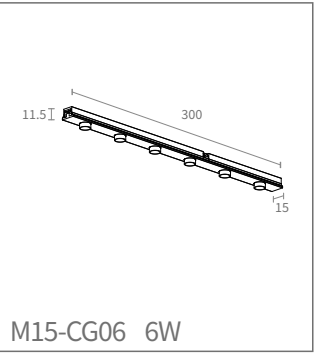

M15-CG06 6W

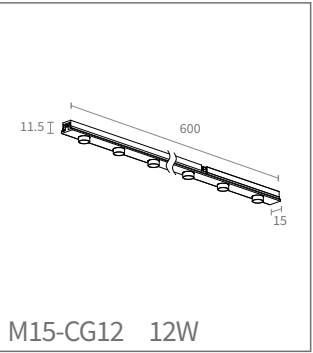

M15-CG12 12W

MT15 Series

Adjustable Grille Light

M15-AG08

Grille Light:

M15-GO08



Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

24°/36°

COLOUR(housing)

Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
8W	48V/24V	3000K/3500K/4000K	661 lm(24° 3000K)

LUMINOUS FLUX

BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
8W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



Available Colors




White





Golden

Light effect

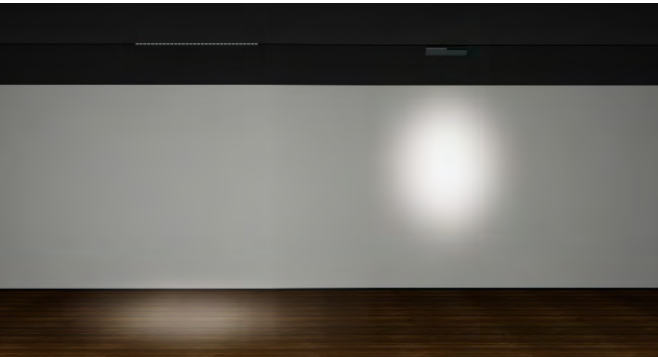

Technical drawing

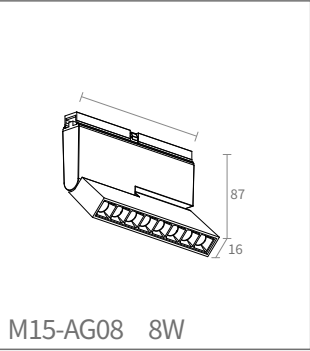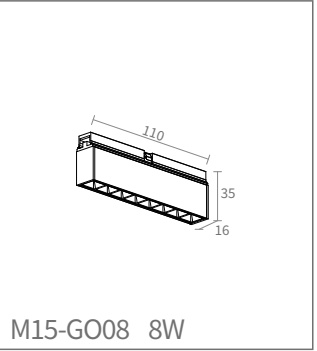

MT15 Series

Spotlight
M15-SP20;M15-SP30;M15-SP40



Quickinfo

GENERAL
Magnetic suction installation
IP20

LED
BRIDGELUX
3W, 5W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL
Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL
ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM
PHYSICAL
Aluminum



Physical photos



M15-SP20 3W



M15-SP30 5W



M15-SP40 7W

Standard configuration

COLOUR TEMPERATURE
3000K 3500K 4000K
CONTROL
ON/OFF
Beam angle
24°/36°
COLOUR(housing)
Black White

Available Colors



White




Golden

Parameters


POWER	VOLTAGE	CCT	LUMINOUS FLUX
3W	48V/24V	3000K/3500K/4000K	200 lm(24° 3000K)
5W	48V/24V	3000K/3500K/4000K	326 lm(24° 3000K)
7W	48V/24V	3000K/3500K/4000K	700 lm(24° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.


Light Distribution

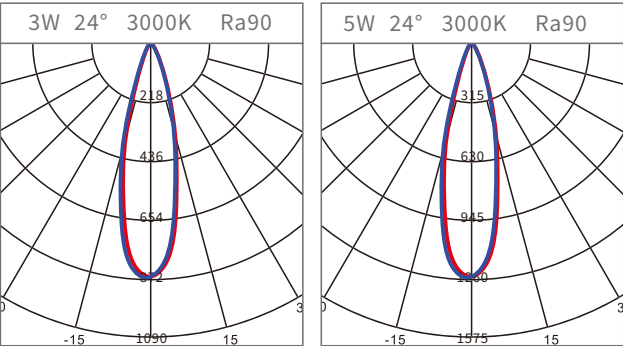


Light effect

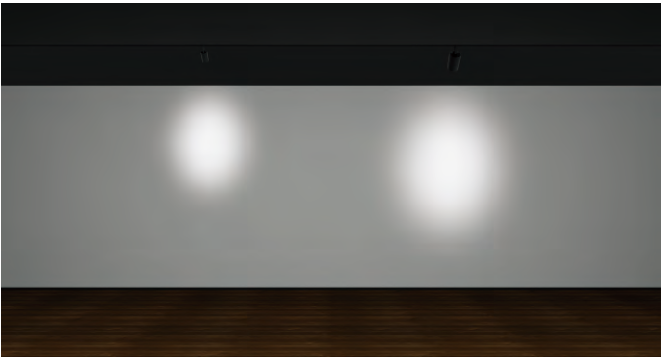


Technical drawing

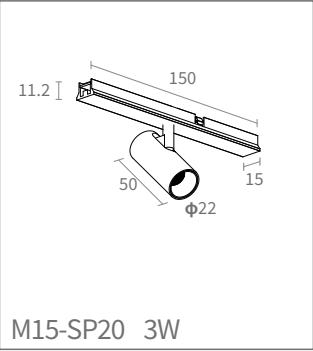

M15-SP20 3W

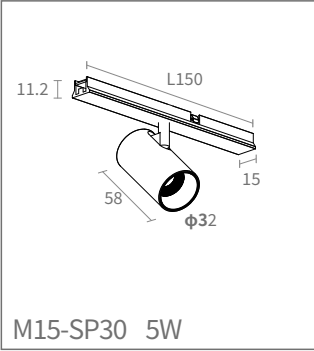

M15-SP30 5W

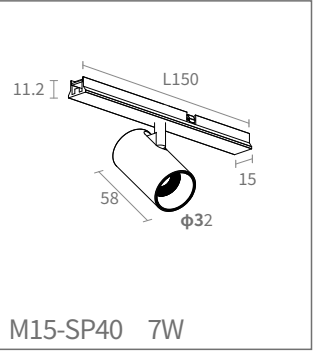

M15-SP40 7W

MT15 Series

Spotlight

M15-DS20;M15-DS30



Standard configuration


COLOUR TEMPERATURE
3000K
3500K
4000K
CONTROL
ON/OFF
Beam angle
24°/36°
COLOUR(housing)
Black
White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
2*3W	48V/24V	3000K/3500K/4000K	395 lm(24° 3000K)
2*5W	48V/24V	3000K/3500K/4000K	613 lm(24° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

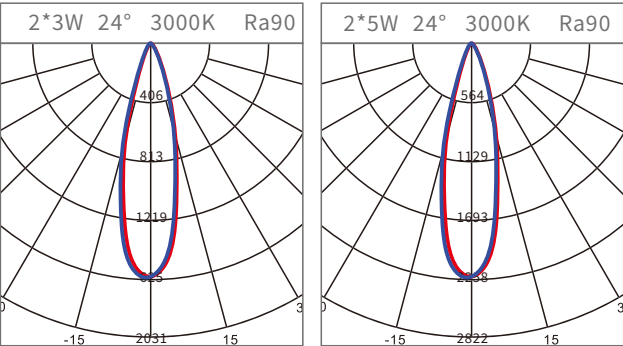

Quickinfo

GENERAL
Magnetic suction installation
IP20
LED
BRIDGELUX
2*3W, 2*5W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3
OPTICAL
Direct illumination
Beam angle 24°/36°
Optical accessories
ELECTRICAL
ON/OFF,Tuya Zigbee
0-10V,Phase DIM,DALI DIM
PHYSICAL
Aluminum



Physical photos



M15-DS20 2*3W



M15-DS30 2*5W

Available Colors




White




Golden


Light effect

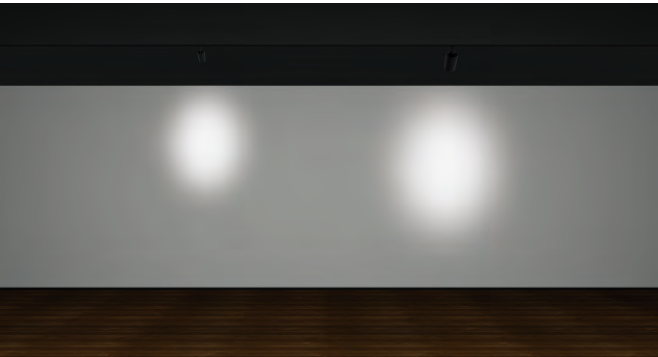


Technical drawing

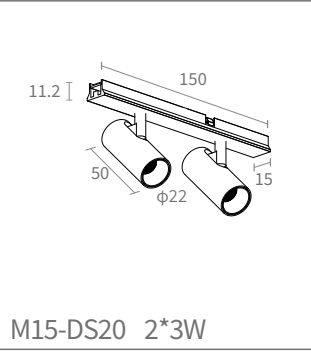

M15-DS20 2*3W

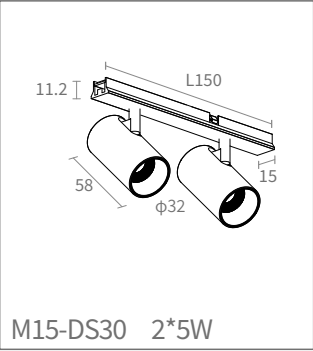

M15-DS30 2*5W

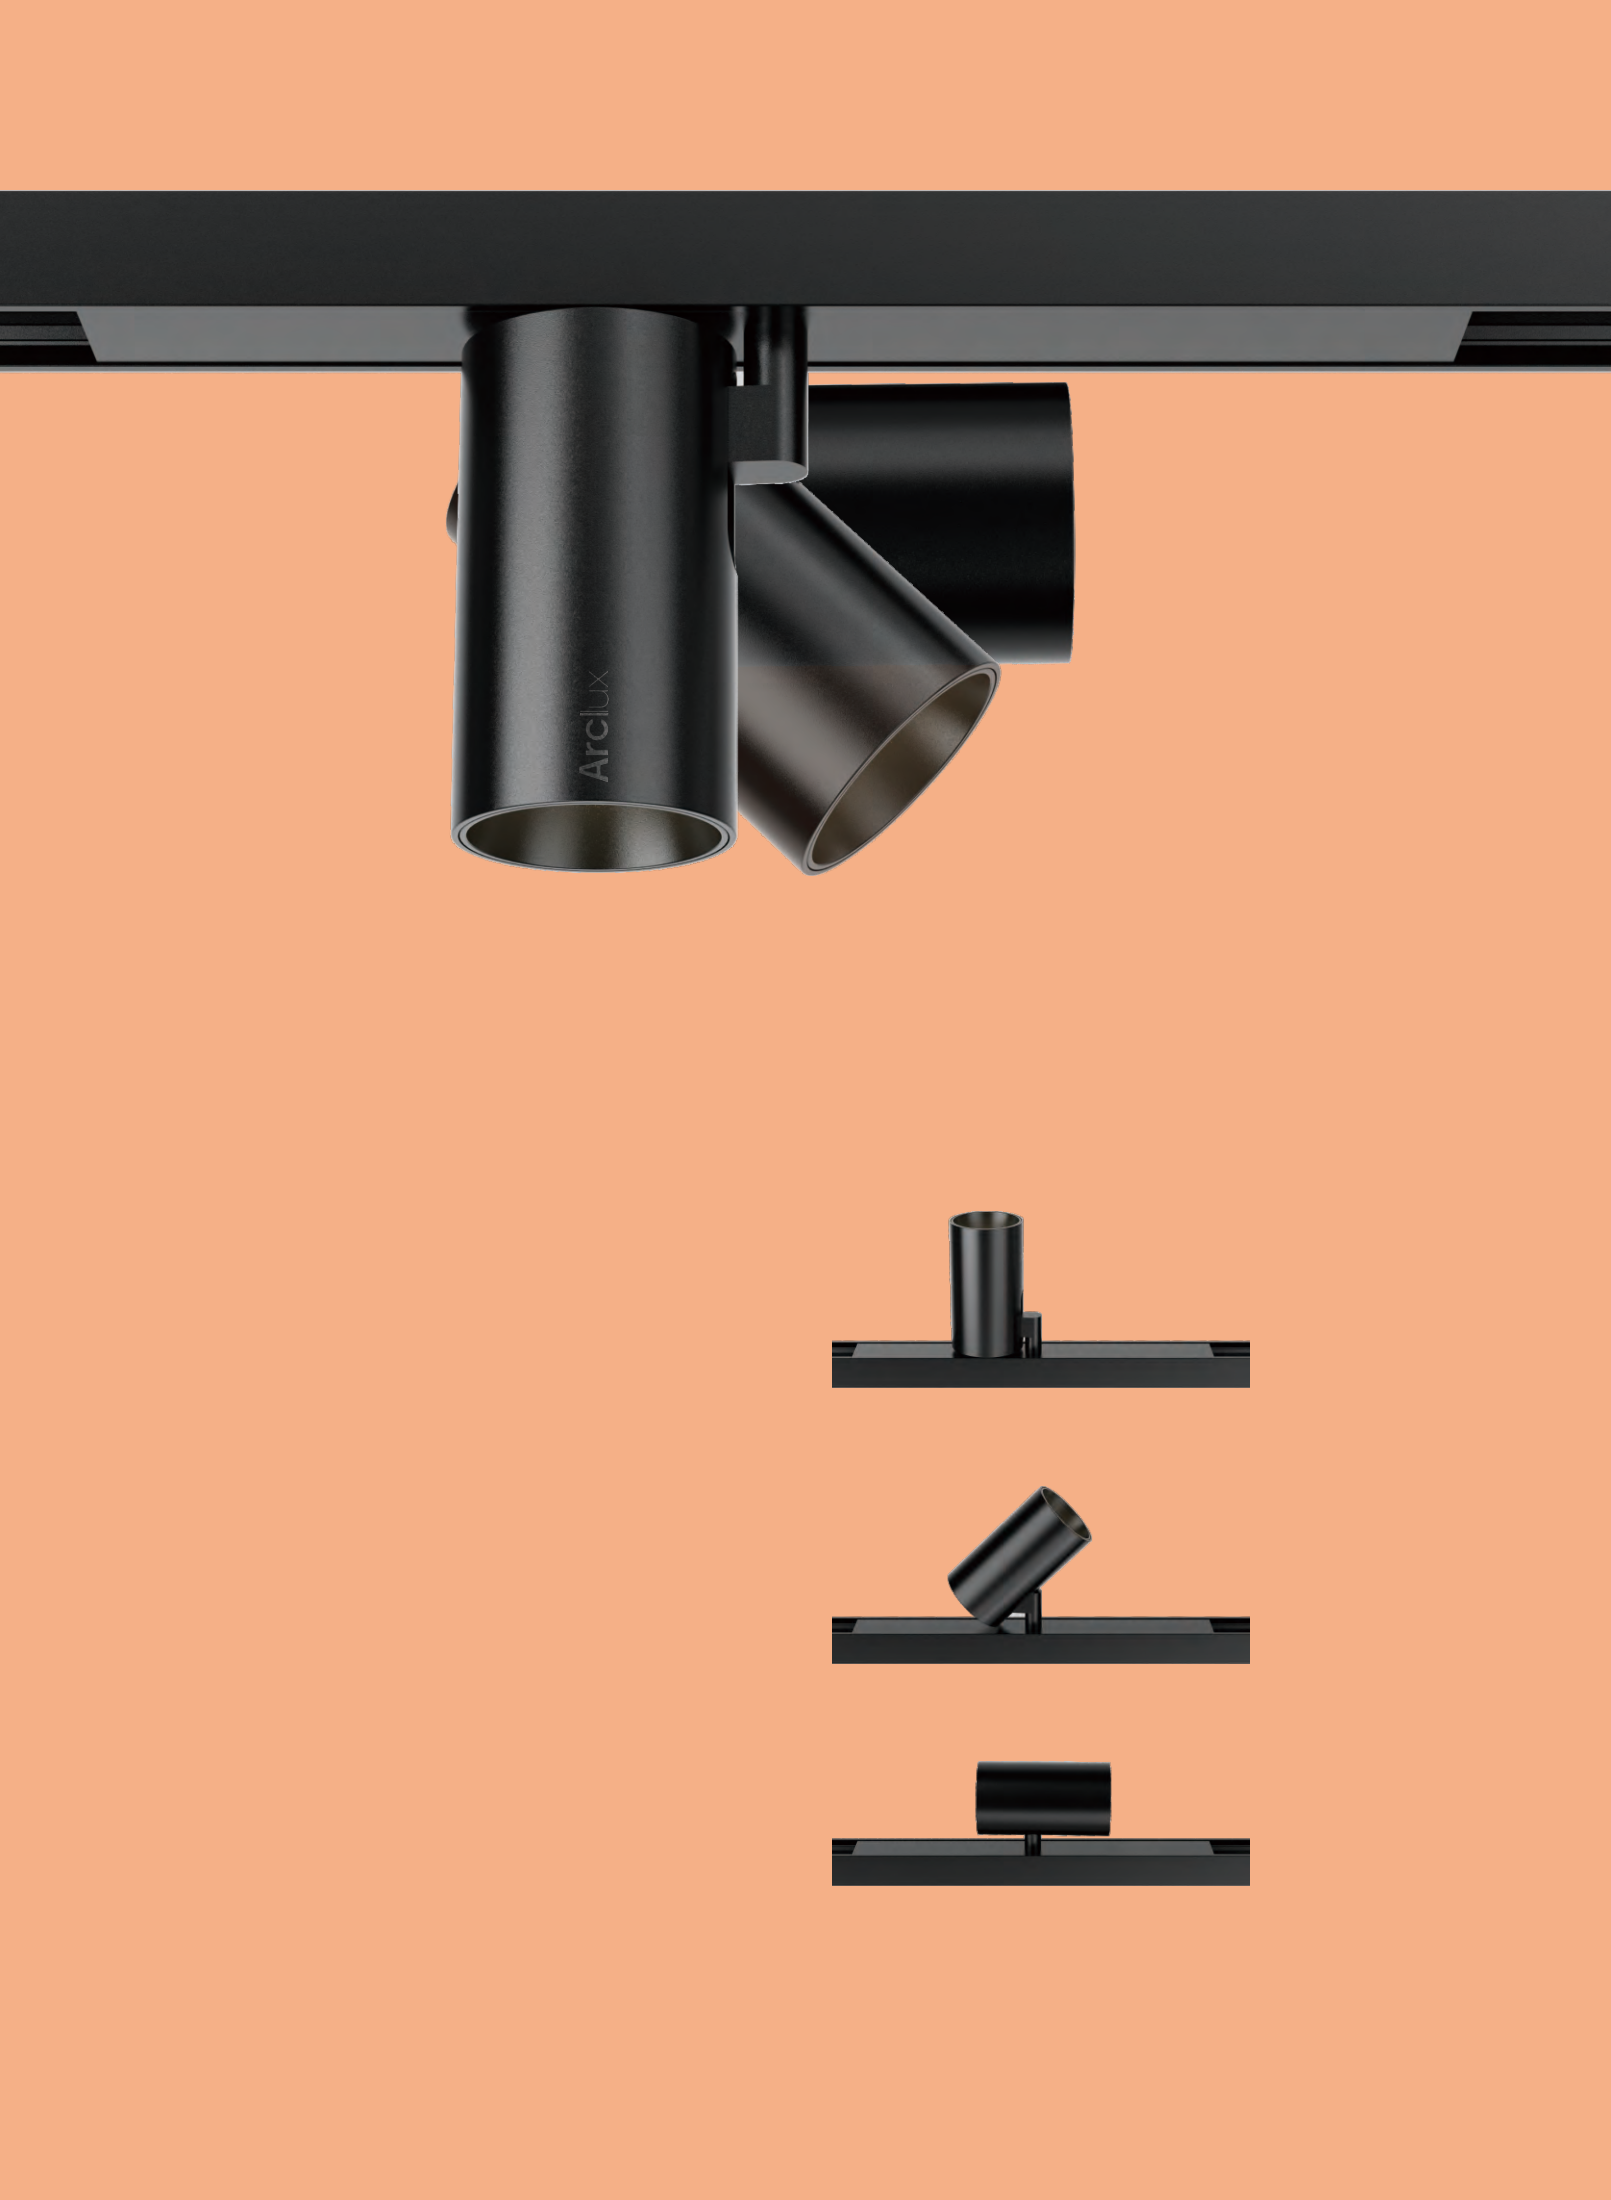



MT15 Series

Double eyelid spotlight
M15-SP20A;M15-SP30A;M15-SP40A



Quickinfo

GENERAL
Magnetic suction installation
IP20

LED
BRIDGELUX
3W, 5W, 7W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL
Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL
ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM

PHYSICAL
Aluminum



RoHS



Physical photos



Standard configuration

COLOUR TEMPERATURE
3000K
3500K
4000K

CONTROL
ON/OFF

Beam angle
24°/36°

COLOUR(housing)
Black
White

Available Colors



White




Golden

Parameters


POWER	VOLTAGE	CCT	LUMINOUS FLUX
3W	48V/24V	3000K/3500K/4000K	200 lm(24° 3000K)
5W	48V/24V	3000K/3500K/4000K	326 lm(24° 3000K)
7W	48V/24V	3000K/3500K/4000K	700 lm(24° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.




Light Distribution

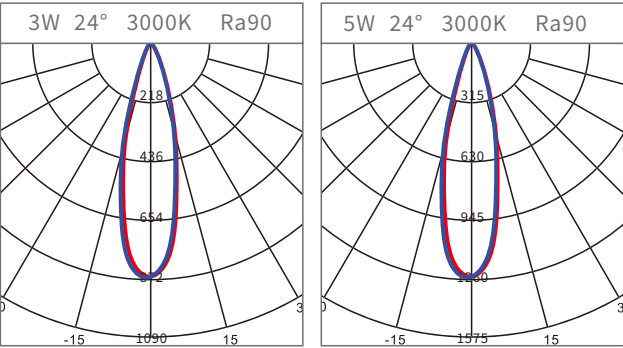


Light effect

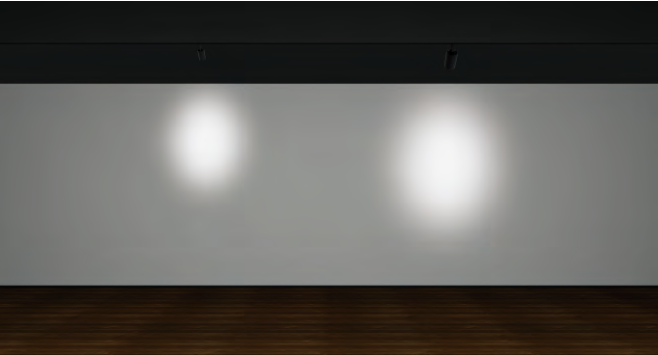

Technical drawing

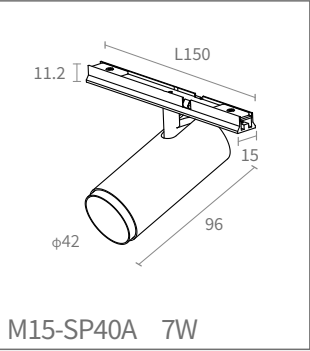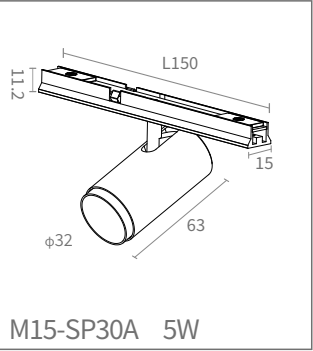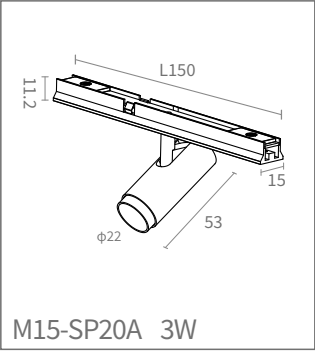

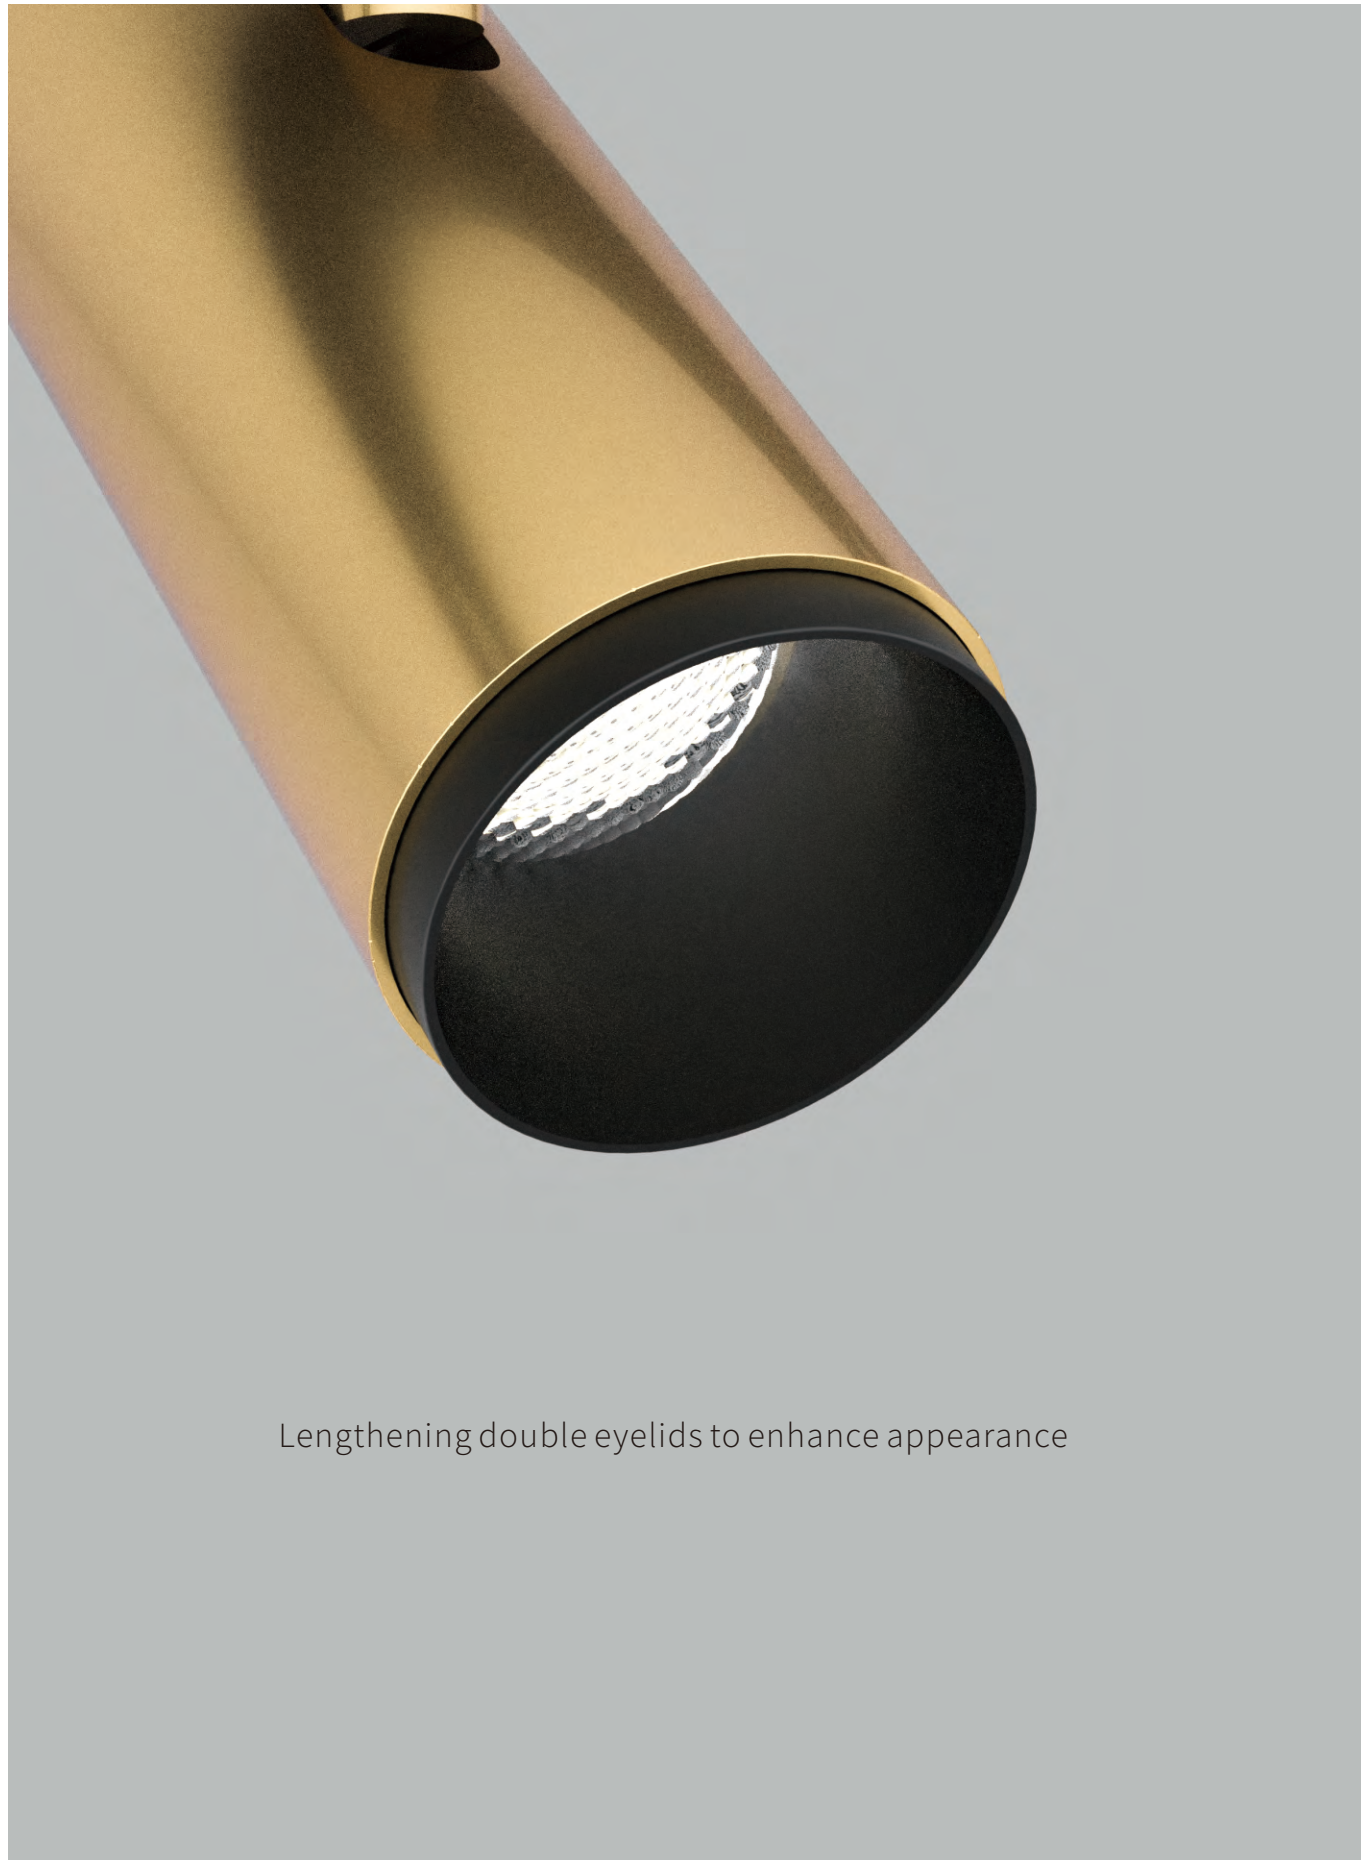

Lengthening double eyelids to enhance appearance



Deep anti-glare and more eye protection

MT15 Series

Suspended light
M15-SU04



Standard configuration


COLOUR TEMPERATURE
3000K 3500K 4000K
CONTROL
ON/OFF
Beam angle
24°/36°
COLOUR(housing)
Black White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
8W	48V/24V	3000K/3500K/4000K	420 lm(110° 3000K)

LUMINOUS FLUX
LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Quickinfo

GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 8W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 24°/36° Optical accessories
ELECTRICAL
ON/OFF, Tuya Zigbee 0-10V, Phase DIM, DALI DIM
PHYSICAL
Aluminum



RoHS



Physical photos



Available Colors




White




Golden

Light effect

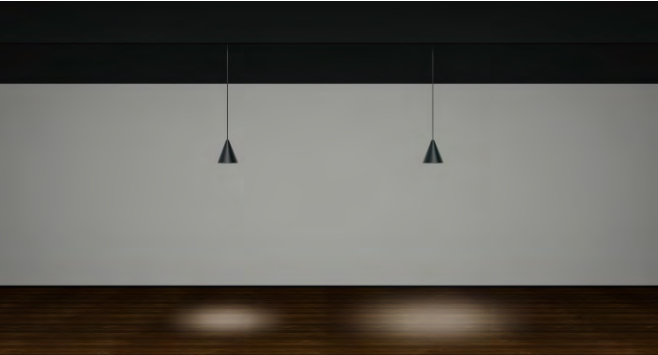

Technical drawing

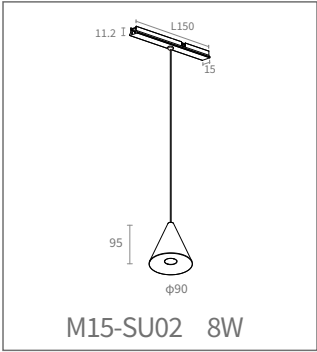

MT15 Series

Global Light
M15-LG80;M15-LGS80



Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
3W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3

OPTICAL

Direct illumination
Beam angle 80°
Optical accessories

ELECTRICAL

ON/OFF,
Tuya Zigbee
0-10V,
Phase DIM,
DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

80°

COLOUR(housing)

Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
3W	48V/24V	3000K/3500K/4000K	168 lm(110° 3000K)

LUMINOUS FLUX

LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.


Light Distribution




Light effect



Technical drawing

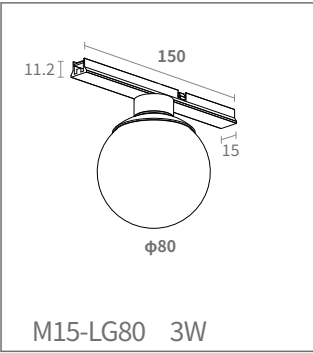

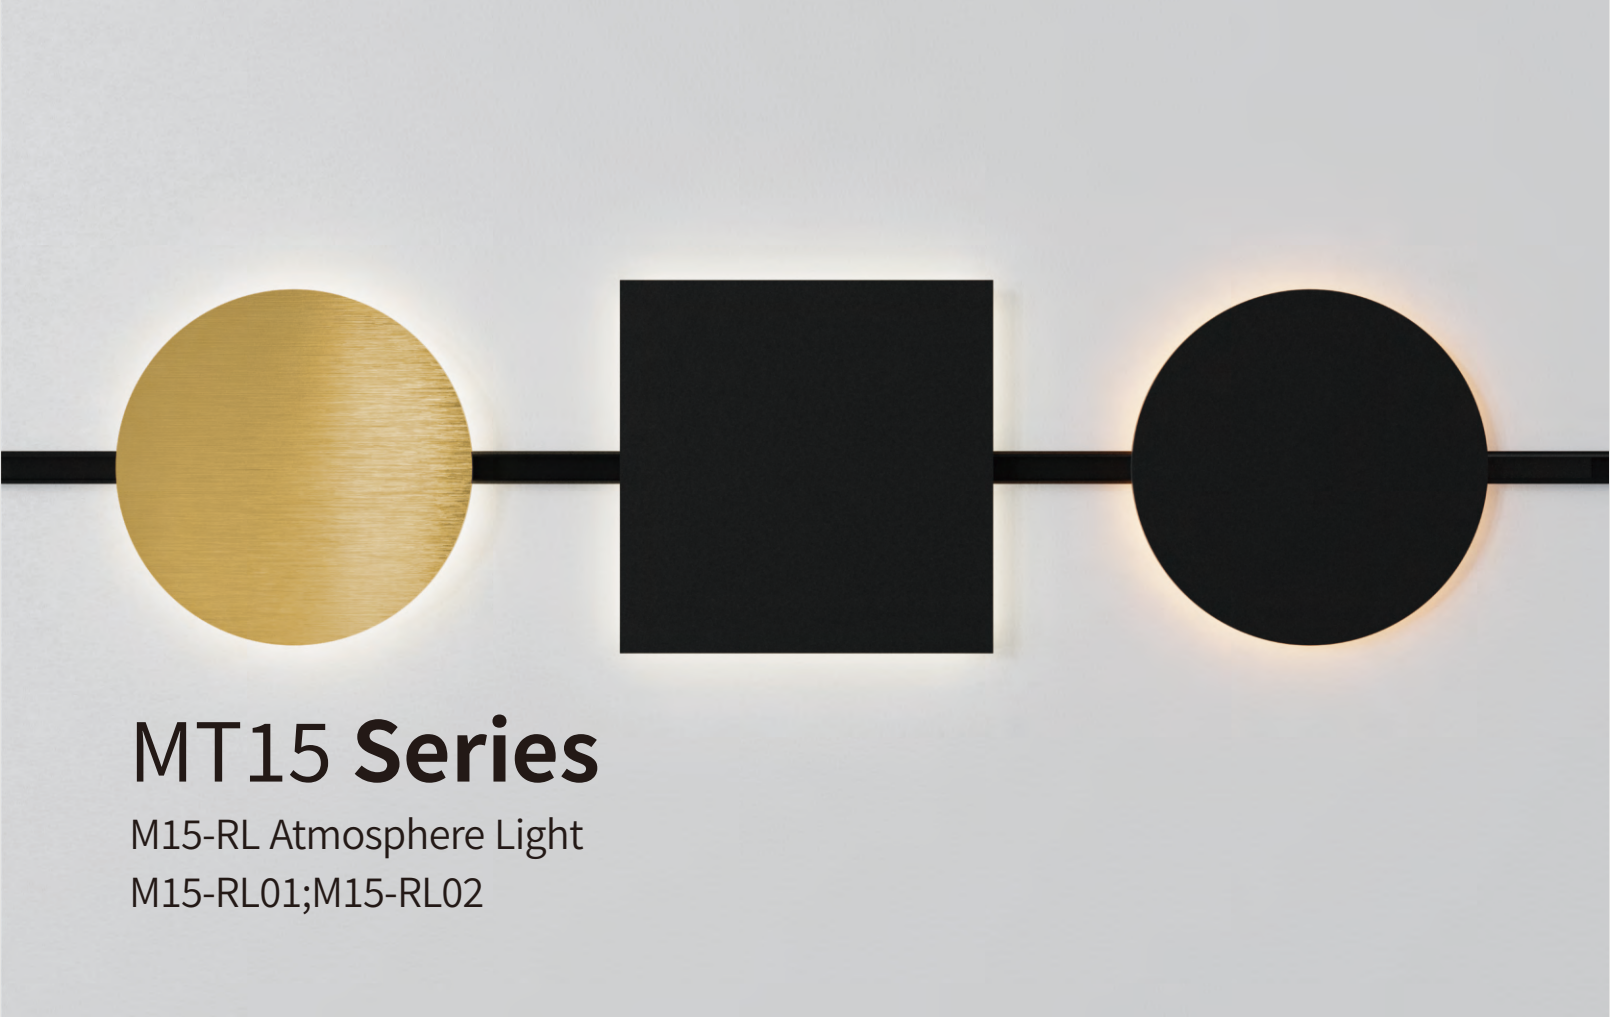

MT15 Series

M15-RL Atmosphere Light
M15-RL01;M15-RL02

Quickinfo

GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 3W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 80° Optical accessories
ELECTRICAL
ON/OFF, Tuya Zigbee 0-10V, Phase DIM, DALI DIM
PHYSICAL
Aluminum



Physical photos



Standard configuration


COLOUR TEMPERATURE
3000K 3500K 4000K
CONTROL
ON/OFF
Beam angle
80°
COLOUR(housing)
Black White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
5W	48V/24V	3000K/3500K/4000K	168 lm(110° 3000K)

LUMINOUS FLUX
LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Technical drawing



Available Colors



MT15 Series

Zoomable light
M15-SP0001



The luminous effect can be adjusted by rotating the lamp

Quickinfo

GENERAL
Magnetic suction installation
IP20

LED
BRIDGELUX
3W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3

OPTICAL
Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL
ON/OFF,
Tuya-Zigbee

PHYSICAL
Aluminum

CE RoHS


The insallation of lighting is very easy, with Arclux magnetic track, just click.
Adopting a modular concept, DIY different lighting fixtures to match different spaces.
The number of lamps can be adjusted upon the actual needs.
Free movement and angle adjustment, increase the freed om of lighting design
safety voltage, No risk of electric shock

Physical photos



M15-SP0001 3W

Technical drawing

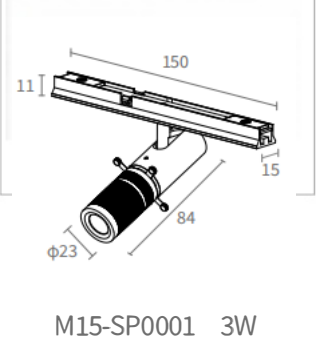

M15-SP0001 3W

Standard configuration

COLOUR TEMPERATURE
3000K
3500K
4000K

CONTROL
ON/OFF

COLOUR(housing)
Black
White

POWER	VOLTAGE	CCT	LUMINOUS FLUX
3W	48V/24V	3000K/3500K/4000K	420 lm

Parameters


LUMINOUS FLUX

EDTEEN B, CRI 90, tolerance range of electrical and optical parameters: ±1.0%

Available Colors



White

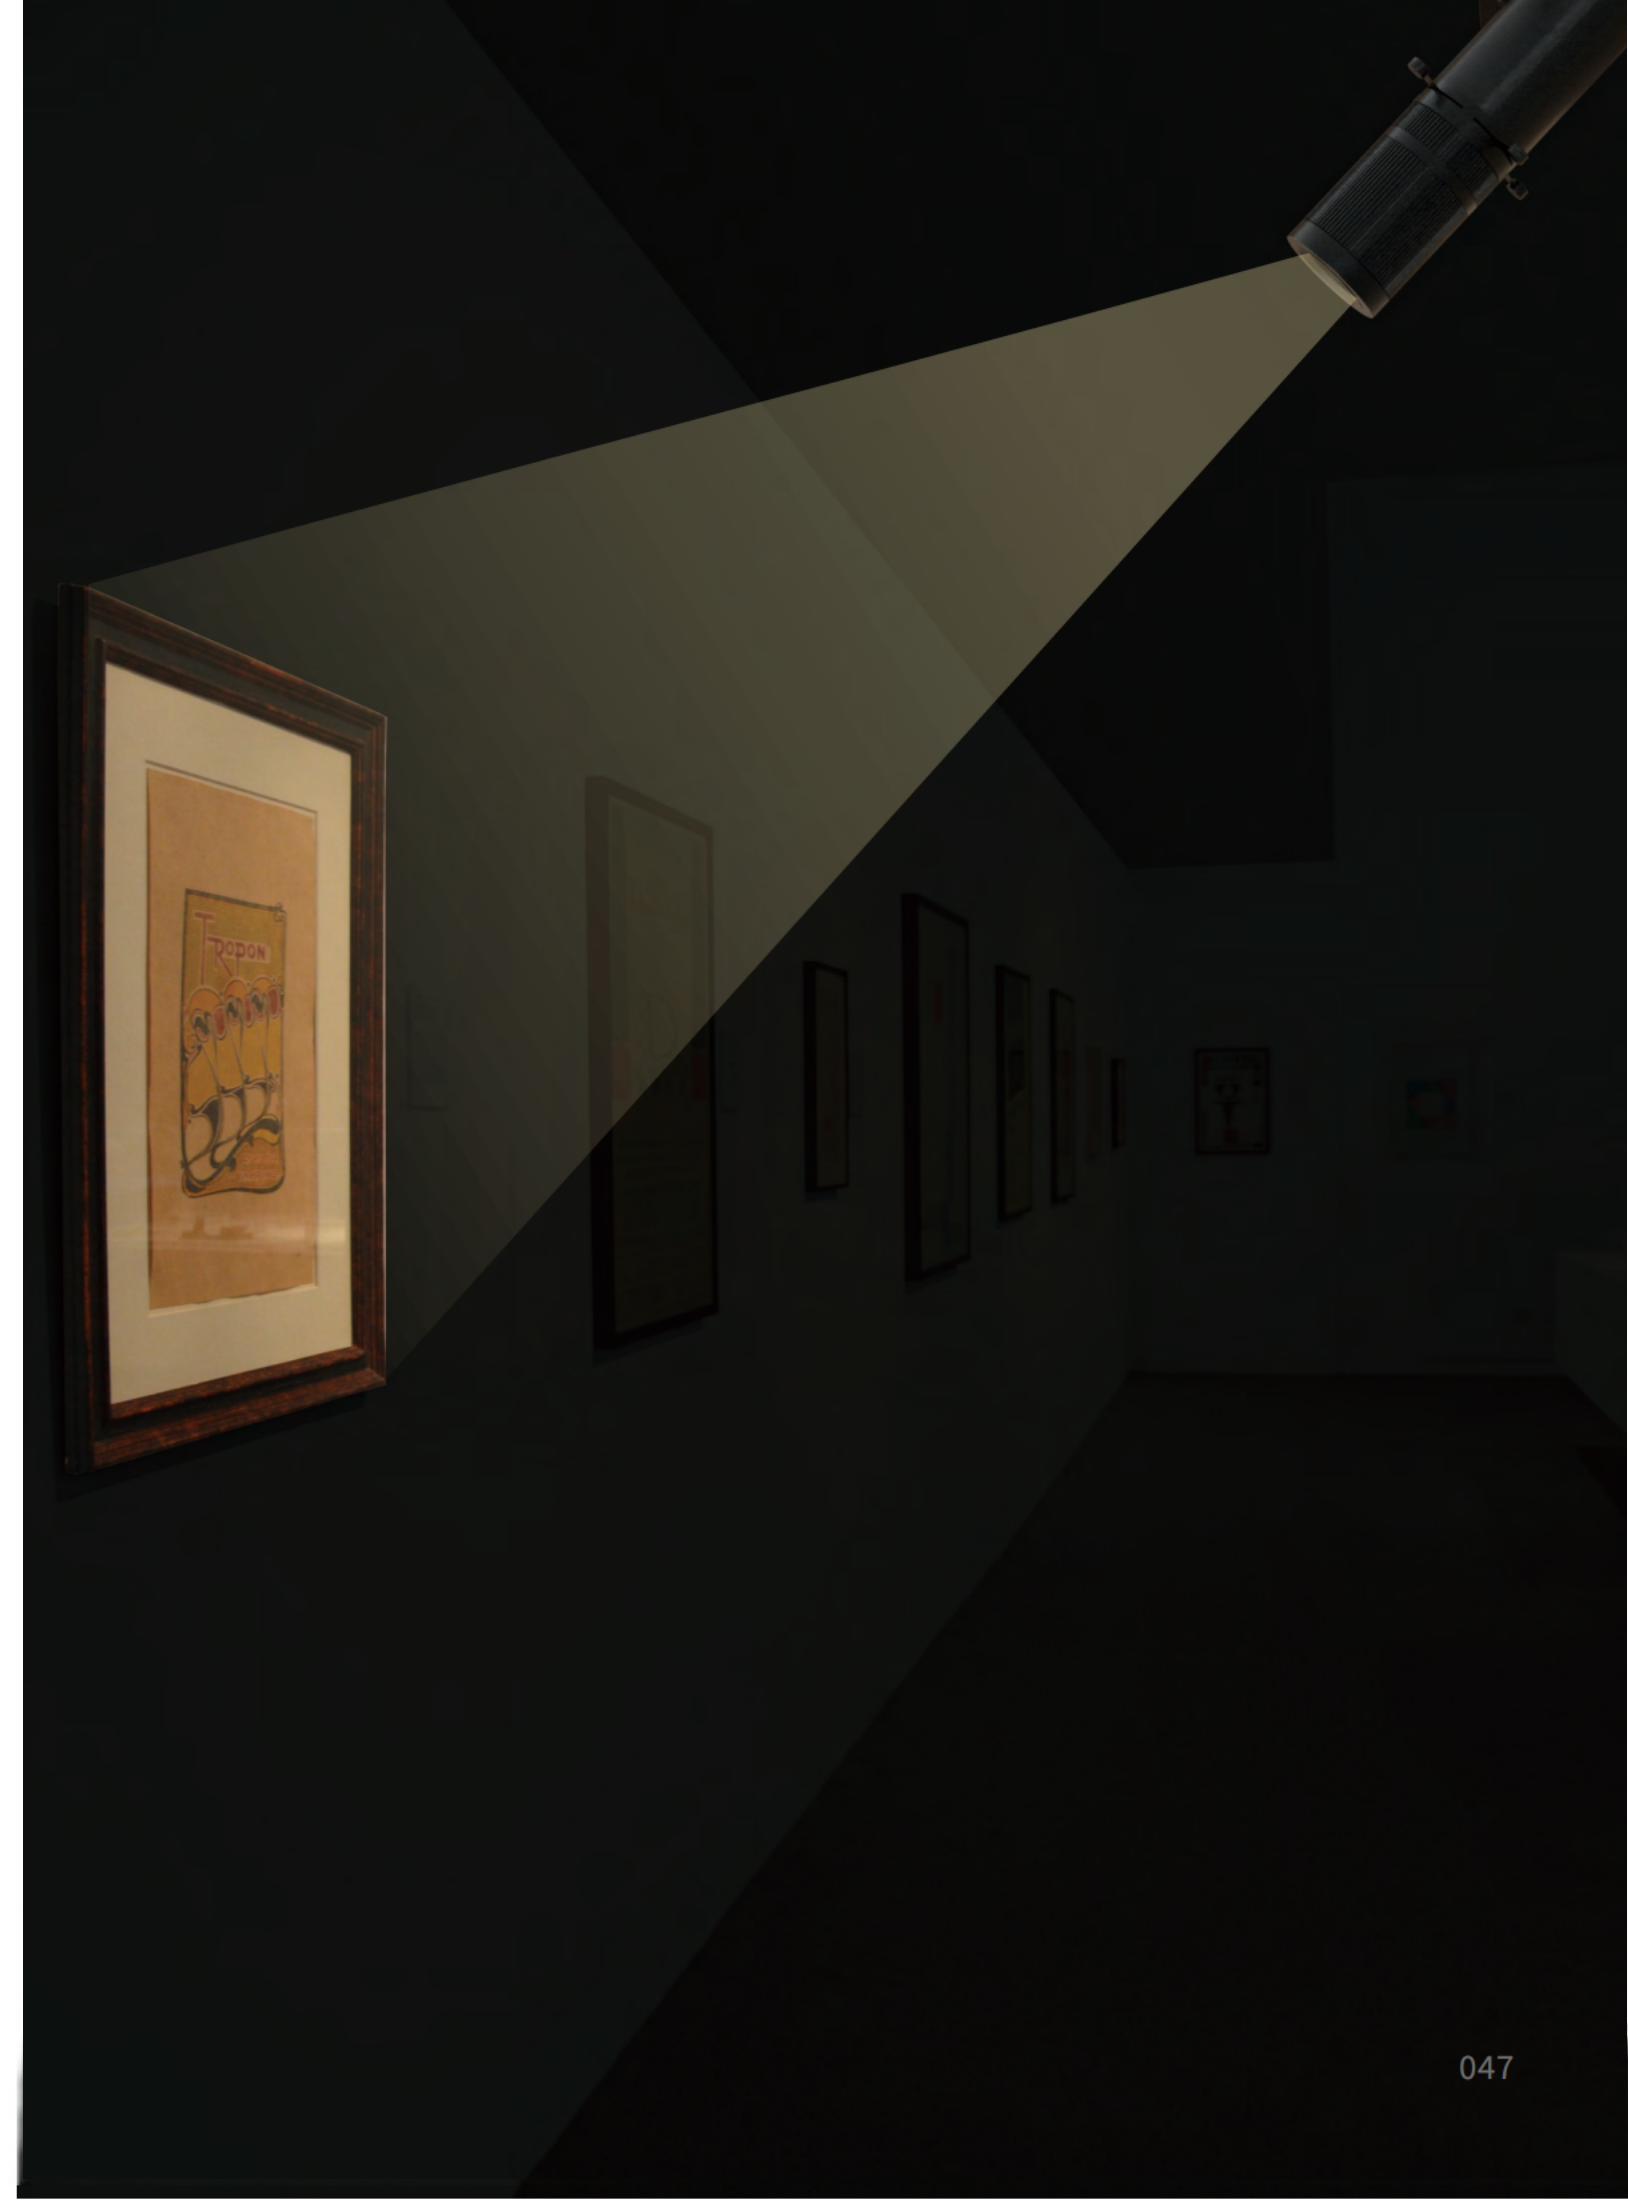

MT15 Series

Cylindrical shape
M15-SP0006;M15-SP0007



Quickinfo

GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 5W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 24°/36° Optical accessories
ELECTRICAL
ON/OFF, Tuya Zigbee 0-10V, Phase DIM, DALI DIM
PHYSICAL
Aluminum





Physical photos



Standard configuration

COLOUR TEMPERATURE
3000K 3500K 4000K
CONTROL
ON/OFF
Beam angle
24°/36°
COLOUR(housing)
Black White

Technical drawing

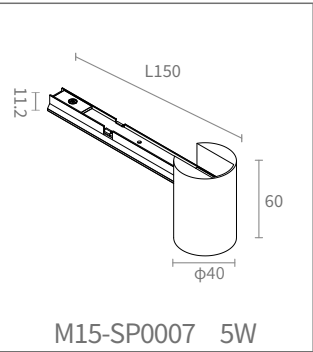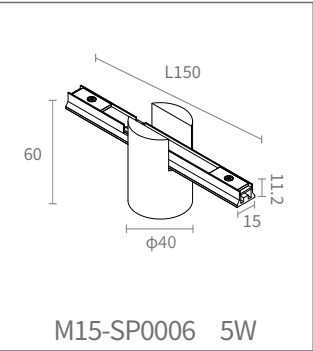

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
5W	48V/24V	3000K/3500K/4000K	420 lm

LUMINOUS FLUX
LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Buyers show



Available Colors



White



Golden

MT15 Series

Cylindrical shape
M15-SP0008



Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF


Beam angle

24°/36°

COLOUR(housing)

Black
White

Technical drawing

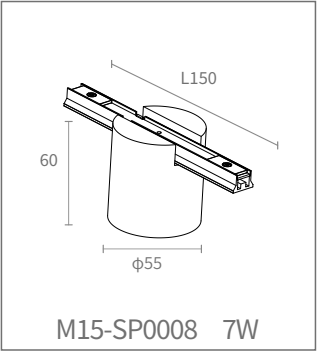

Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
7W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF,
Tuya Zigbee
0-10V,
Phase DIM,
DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



M15-SP0008 7W

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
7W	48V/24V	3000K/3500K/4000K	680lm

LUMINOUS FLUX

LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Buyers show



Available Colors



White



Golden



MT15 Series

Tube Light
M15-SU07


Standard configuration

POWER
4W
VOLTAGE
48V/24V
COLOUR TEMPERATURE
3000K
3500K
4000K
Beam angle
360°
COLOUR(housing)
Black
White
CONTROL
ON/OFF


Physical photos



Technical drawing

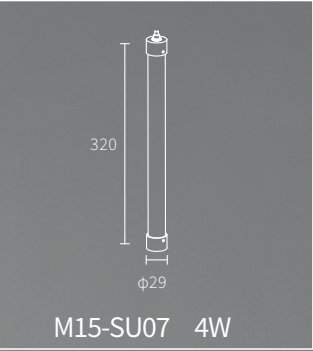


Available Colors

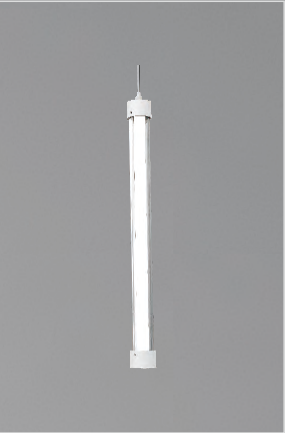

MT15 Series

Tube Light
M15-SU08

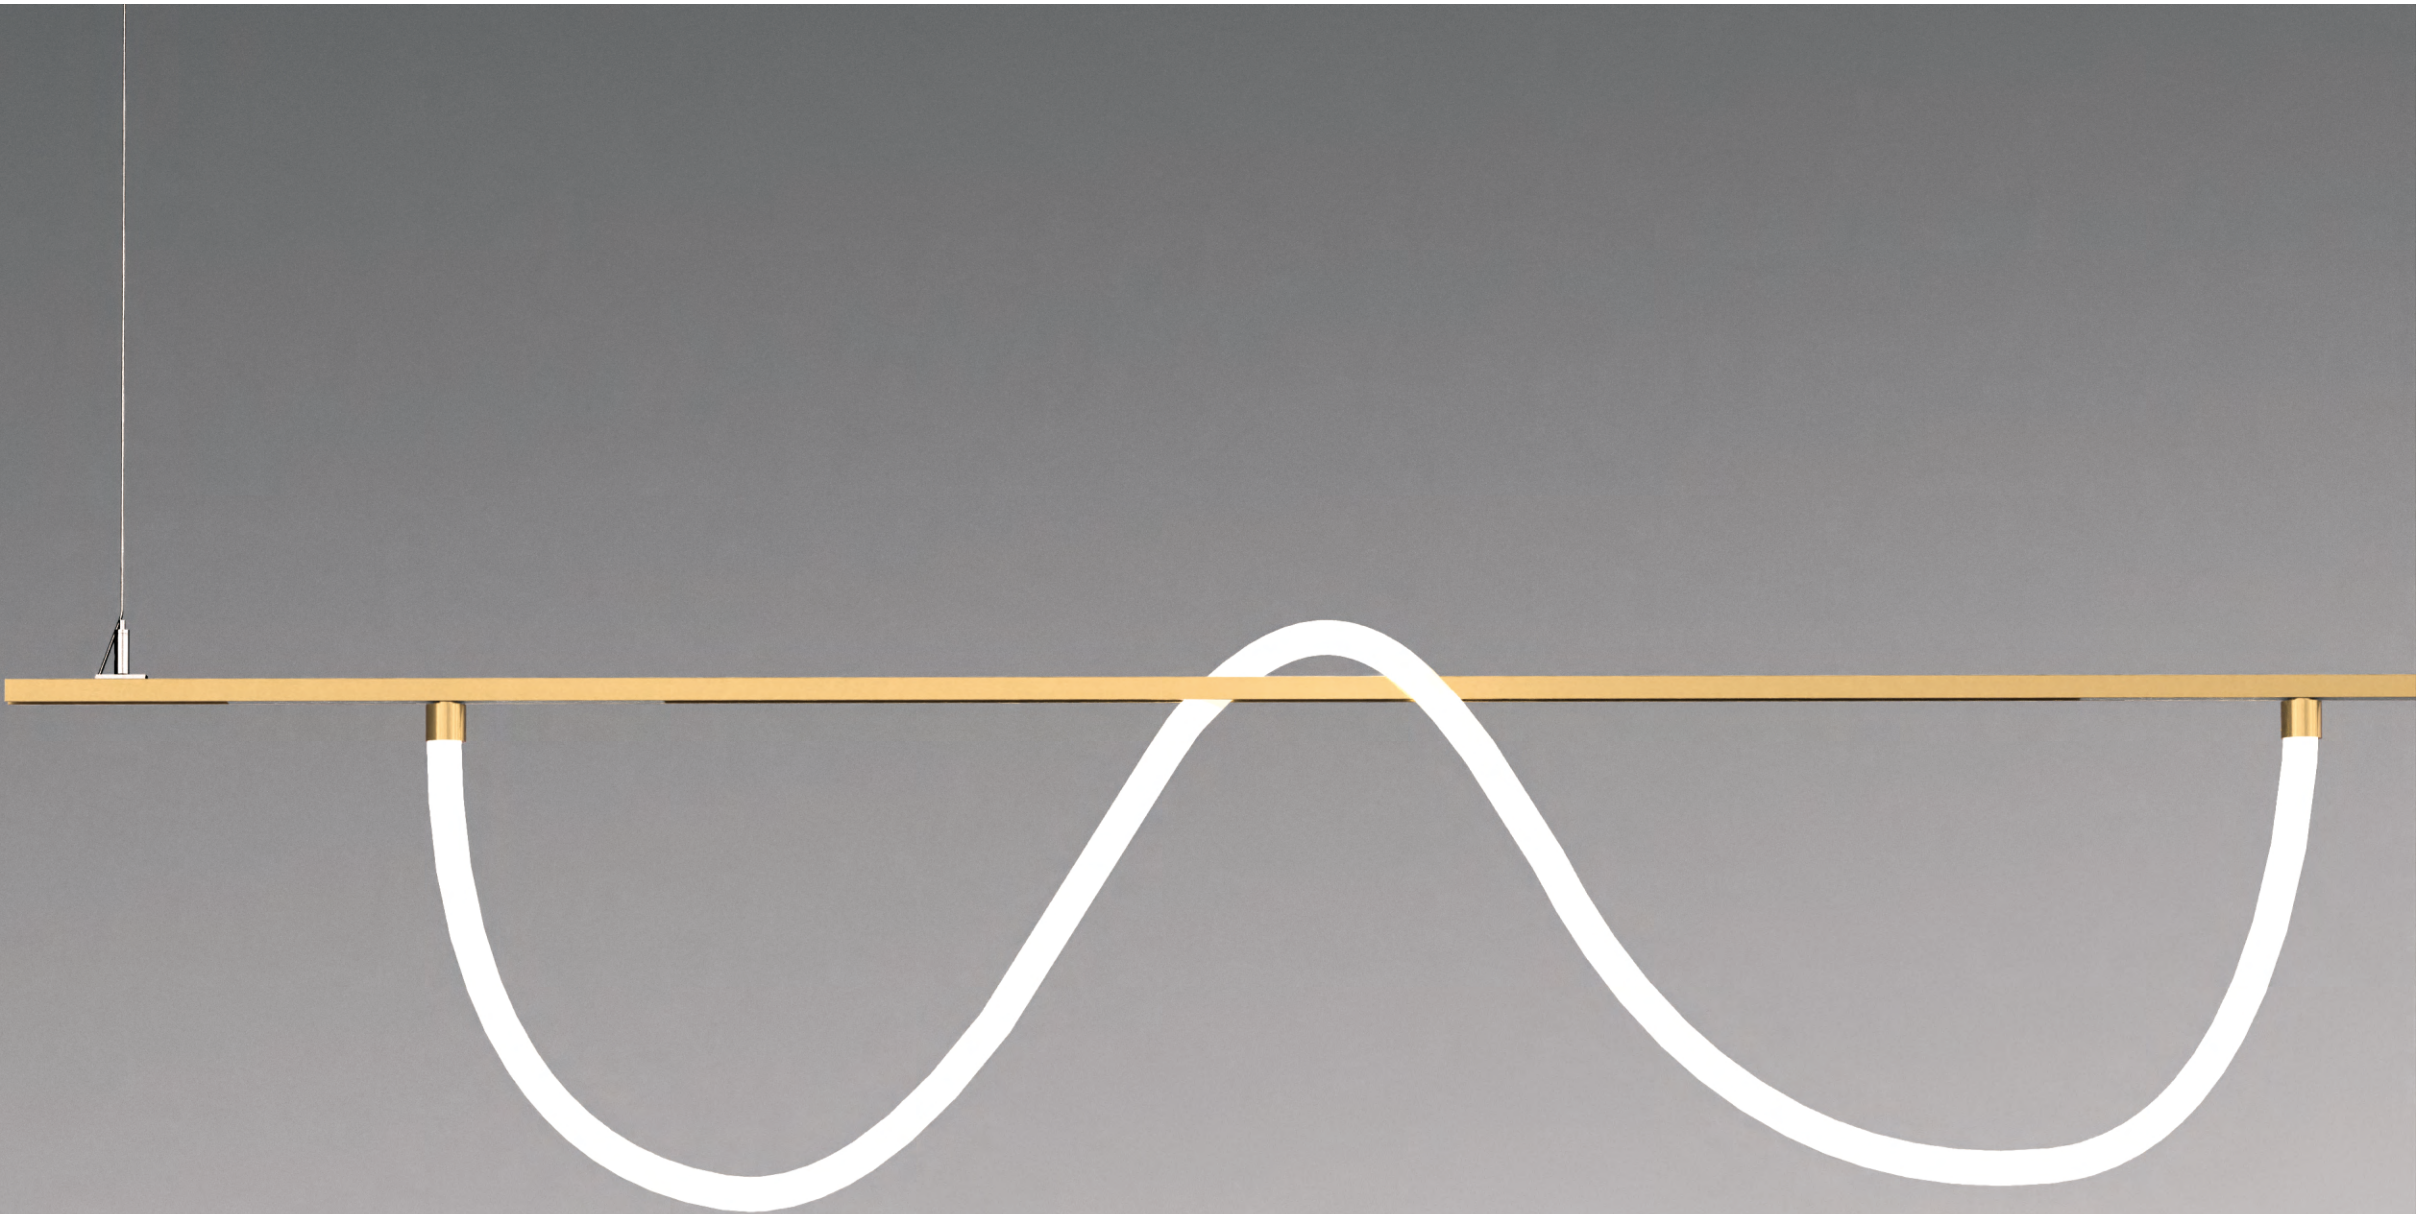

Standard configuration

POWER

12W/M

VOLTAGE

48V/24V

COLOUR TEMPERATURE

3000K
3500K
4000K

Beam angle

360°


COLOUR(housing)

Black
White

CONTROL

ON/OFF,
Tuya
Zigbee
0-10V,
Phase DIM,
DALI DIM

Technical drawing

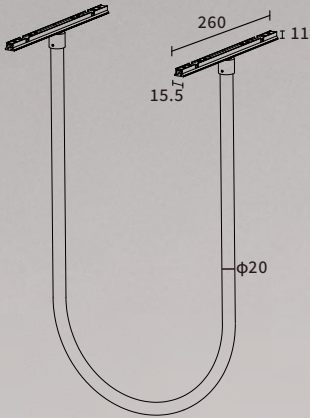

M15-SU08 12W/m

Available Colors



White



Golden



MT15 Series


Wall Reading Light
M15-SU09



Standard configuration

POWER
5W
VOLTAGE
48V/24V
COLOUR TEMPERATURE
3000K 3500K 4000K
Beam angle
24°/36°
COLOUR(housing)
Black White
CONTROL
ON/OFF

Technical drawing

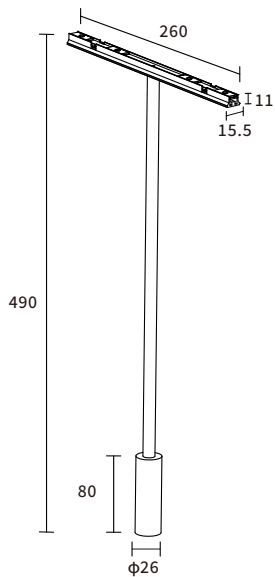

M15-SU09 5W

Available Colors



White




Golden

MT15 Series

Tube Light
M15-SU10



Technical drawing

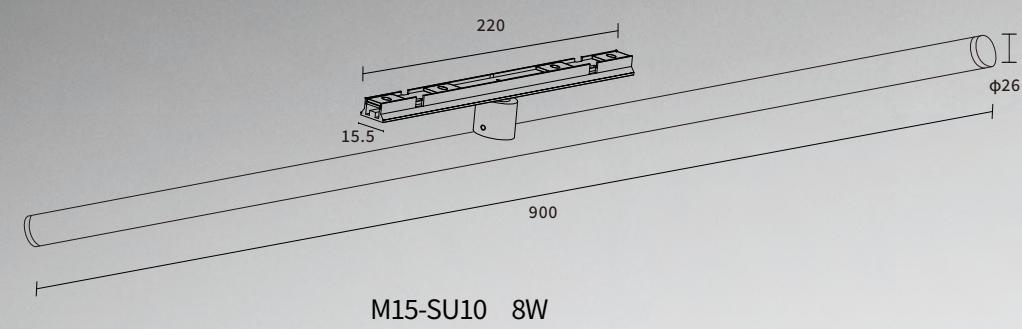

Standard configuration

POWER
8W

VOLTAGE
48V/24V

COLOUR TEMPERATURE
3000K
3500K
4000K

Beam angle
160°

COLOUR(housing)
Black
White

CONTROL
ON/OFF,Tuya Zigbee,0-10V,
Phase DIM,DALI DIM

Available Colors



White



Golden





MT15 Series

Suspended light
M15-SU11




Technical drawing

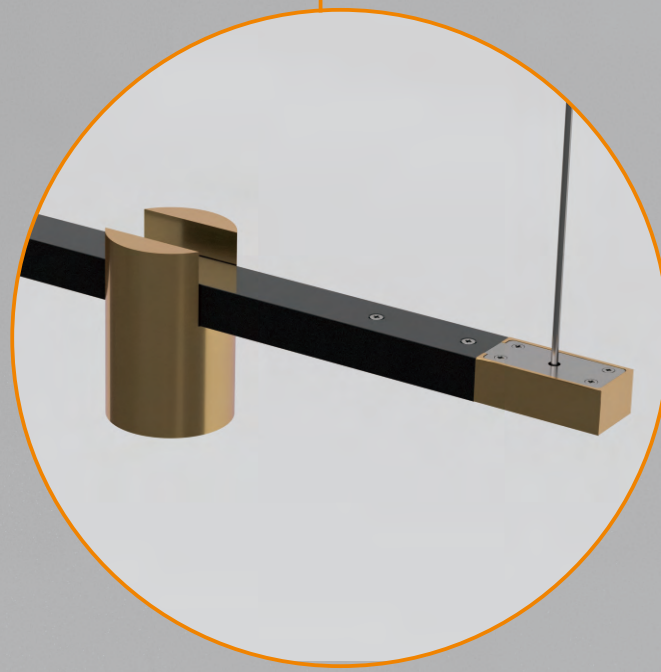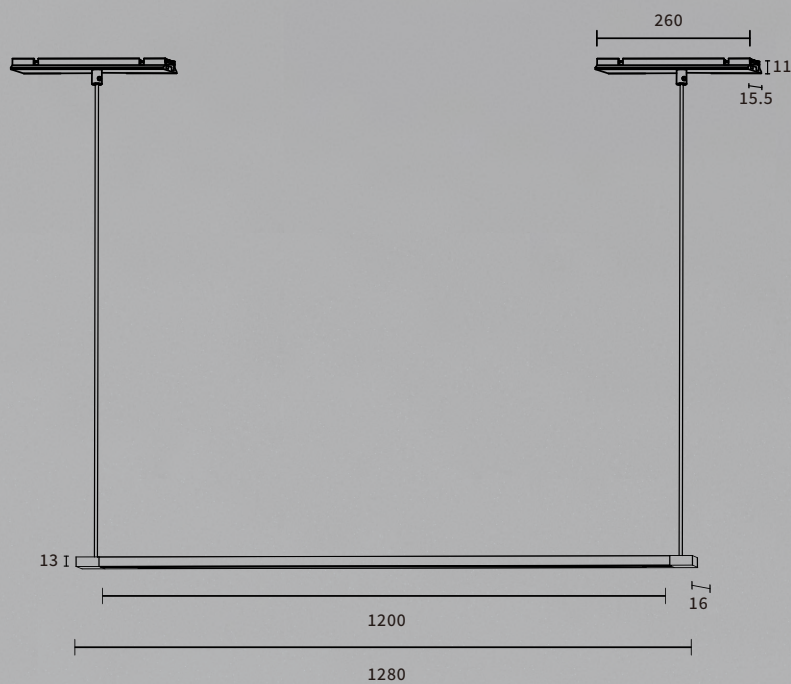

MT15 Series

Suspended light
M15-SU13



Technical drawing

