


## SKYLINE 360


- Ø13mm, 360° starin-less neon
- Long stretching, Large spanning, Long-lasting styling

# SKYLINE 360


- Any angle, free rotation
- 5m/10m Optional

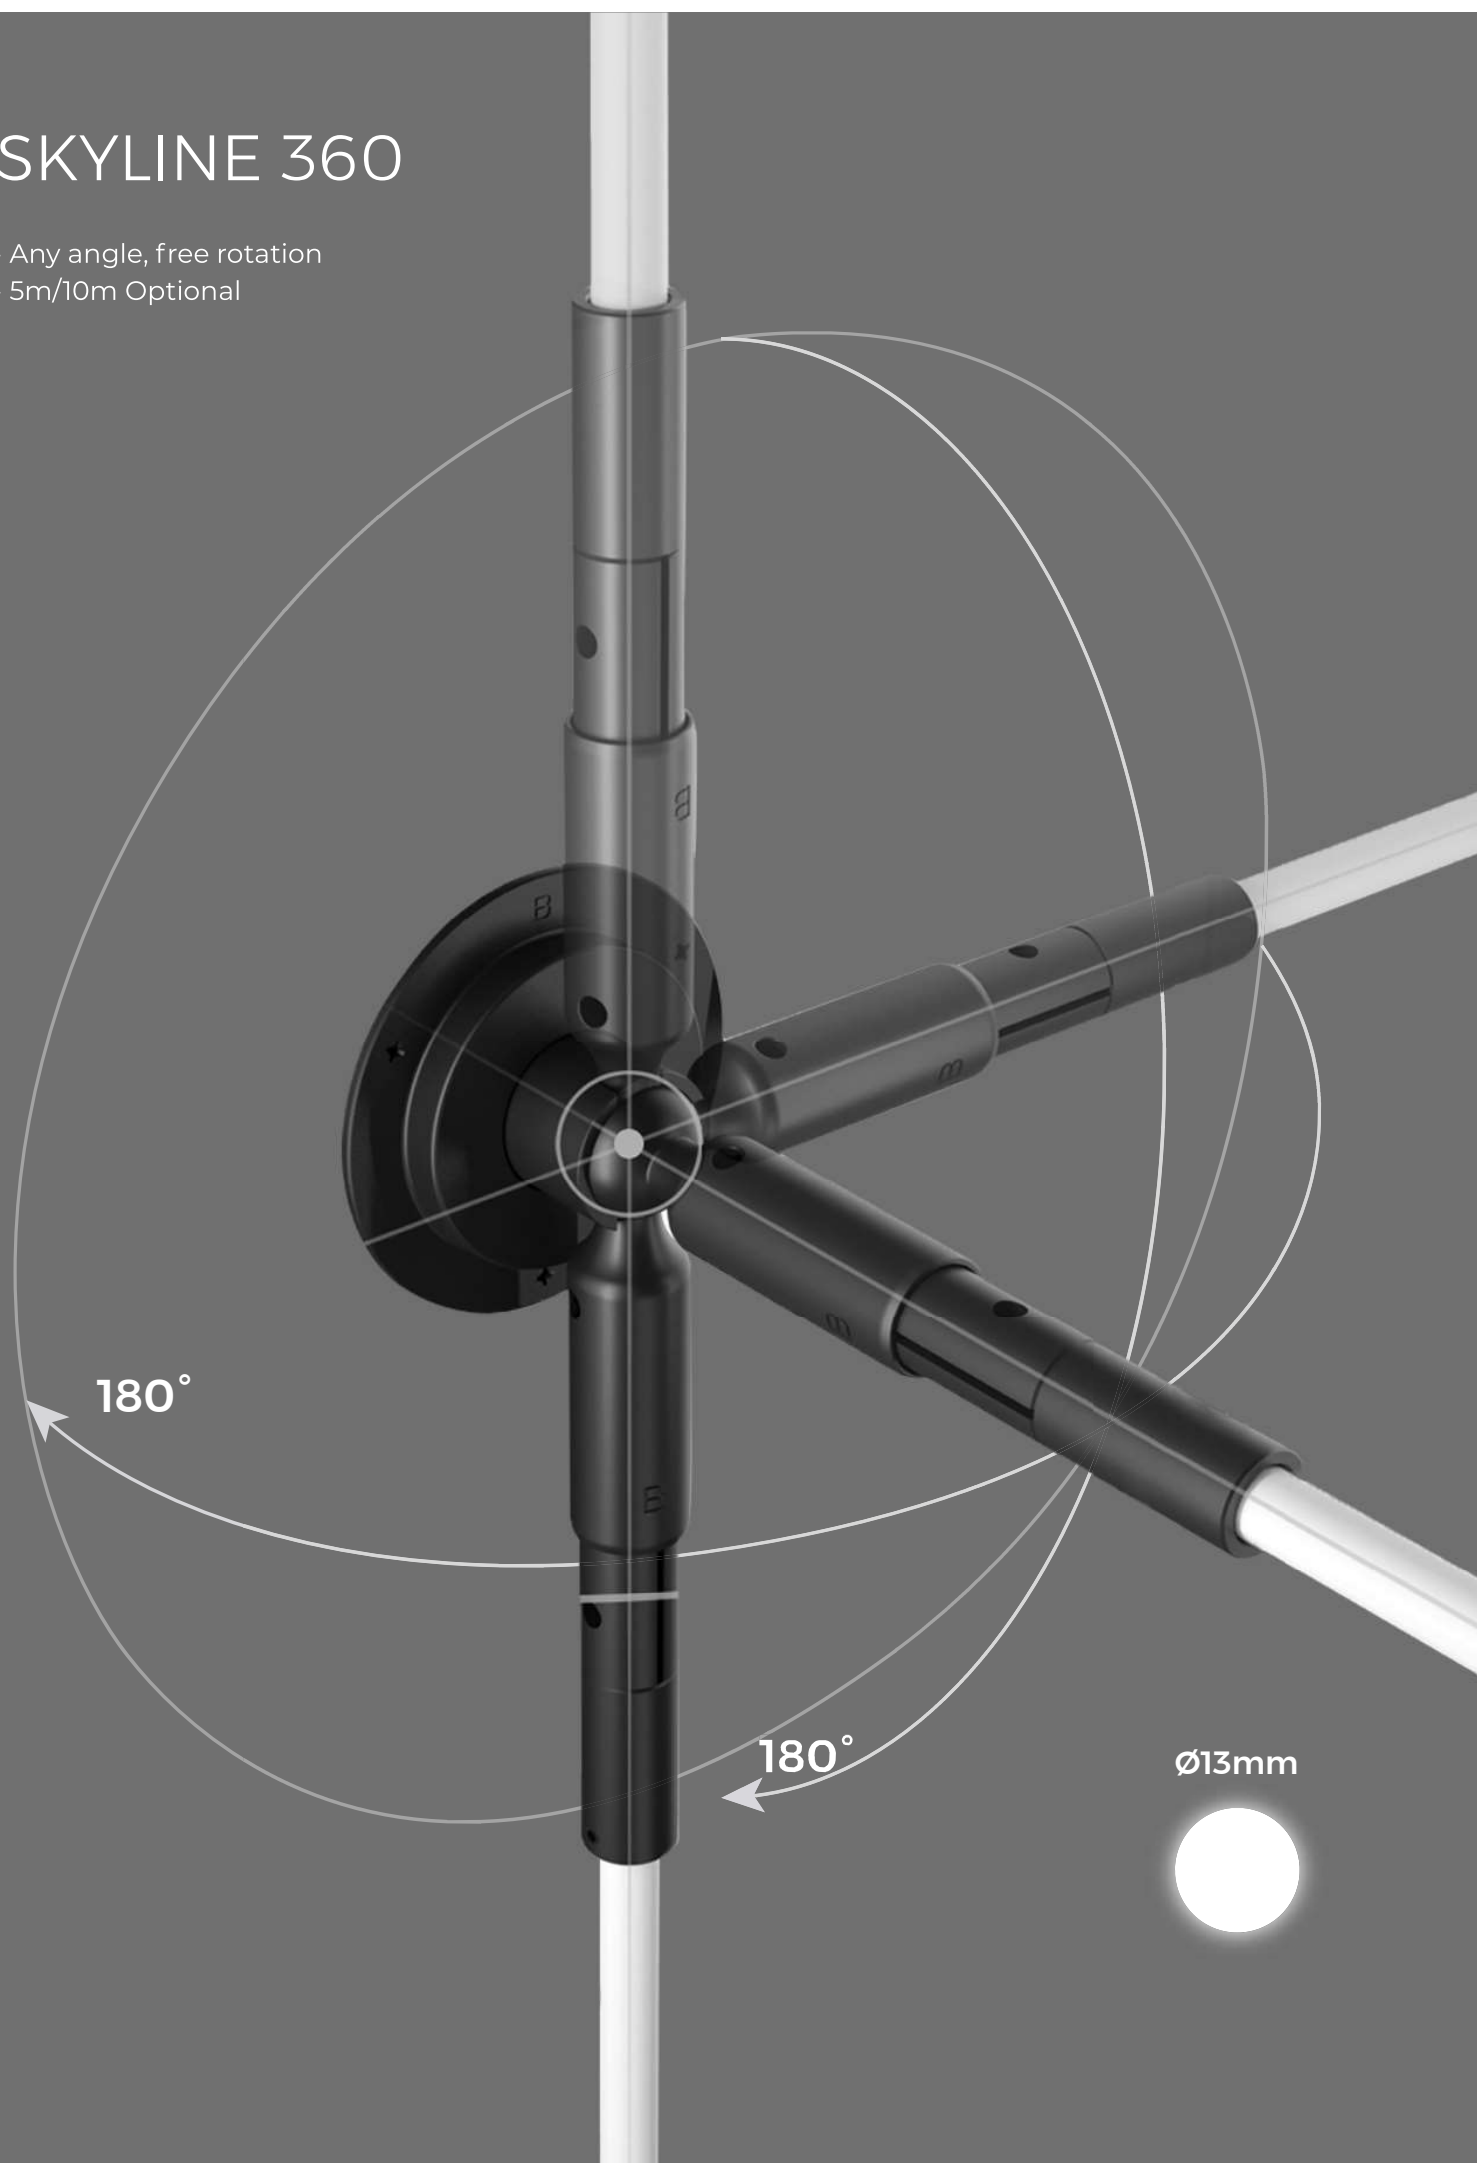

## skyline 360

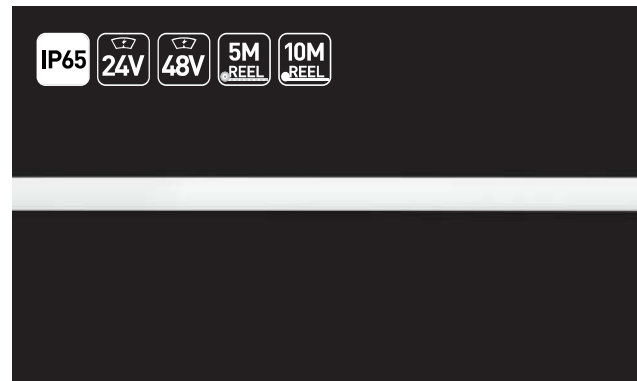

- 13mm diameter, 360° uniform light
- Anti-gravity design, with steel wire inside, can be straight in the air
- Silicone co-extrusion, baby-skin feel in touch
- IP65, suitable for indoor decorative or artistic lighting
- 3-year warranty, life span  $\geq 36000$ h

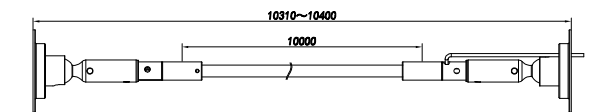

### Basic Parameters

Series	Cutting unit	Input voltage	Input current	Typ. power	Size
White Light	14LED/25mm	DC24V	0.54A	13W	5M
White Light	28LED/50mm	DC48V	0.27A	13W	10M
<b>Bend radius</b>	<b>&gt;60mm</b>				

### Photo-electric Parameters

Input voltage	CRI	CCT	LM/m	LM/W
24V	>90	2300 K	585	45
		2700 K	675	52
		3000 K	700	54
		4300 K	700	54
48V		2300 K	585	45
		2700 K	675	52
		3000 K	700	54
		4300 K	700	54

1. The above parameters are tested based on 1M standard products;
2. The power and luminous flux are allowed to have an error range of  $\pm 15\%$ ;
3. The above parameters are typical values;