


SPOT-22 | SPOT-32 | SPOT-42

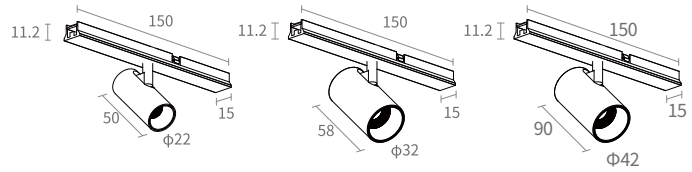

Basic Parameters

Material	ALUMINIUM
Color	White (WT) Black (BK)
Adjustable angle	Vertical 90° / horizontal 350°
Size	Φ22x50mm Φ32x58mm Φ42x90mm

Luminaire Parameters		
Model	129.4.22.3000.-	
Light source	COB	
Input voltage	48V	
Power	3W	
CRI	Ra>90	
CCT	3000K/4000K	
Beam angle	24°	36°
Light efficiency*	45LM/W	60LM/W
Luminous flux*	135LM	180LM
* Light efficiency & Luminous flux parameters based on 3000K Light source 4000K Light efficiency & Luminous flux=3000K*1.08		

Luminaire Parameters		
Model	129.4.32.3000.-	
Light source	COB	
Input voltage	48V	
Power	5W	
CRI	Ra>90	
CCT	3000K/4000K	
Beam angle	30°	36°
Light efficiency*	60LM/W	50LM/W
Luminous flux*	300LM	250LM
* Light efficiency & Luminous flux parameters based on 3000K Light source 4000K Light efficiency & Luminous flux=3000K*1.08		

Luminaire Parameters		
Model	129.4.42.3000.-	
Light source	COB	
Input voltage	48V	
Power	7W	
CRI	Ra>90	
CCT	3000K/4000K	
Beam angle	24°	36°
Light efficiency*	60LM/W	60LM/W
Luminous flux*	420LM	420LM
* Light efficiency & Luminous flux parameters based on 3000K Light source 4000K Light efficiency & Luminous flux=3000K*1.08		

