

TUB M OUT

Code	01.0593.9.930.WH
Color	White
Input Wattage	12 W
Luminaire luminous flux	1210 Lm
Luminaire efficacy	100,8 lm/W
CCT	3000K
CRI	>90
Voltage (V)	220-240V, 50/60Hz
Warranty	5 Years
IP Grade	IP20

OPTICAL

Type	CREE LED
Light beam angle	50°
Light distribution	Symmetric


ELECTRICAL

Driver	Included
Power system	14 W
Output Current	300mA
Output Voltage	28V-50V
Dimming	NO DIM
Input Voltage	220-240V
Input Frequency	50-60Hz
Dimension LxWxH(mm)	100x43x22,5
Protection type	IP20
Construction material	Plastic
Driver mounting	Remote
Ta °C	-20°C to 50°C
Tc °C	80°C

OTHER DATA

Cutout dimension (mm)	Ø100mm
Recommended height (mm)	70mm
Swivel angle	45°
Rotation angle	355°
Fixings Hardware	Metal clip
Mounting	Ceiling recessed trim
Construction material	Aluminium / Polycarbonate
Operating Ambient Temp.	-20 to 40 °C
Weight	0,48 kg
Gross weight	0,575 kg

CERTIFICATIONS

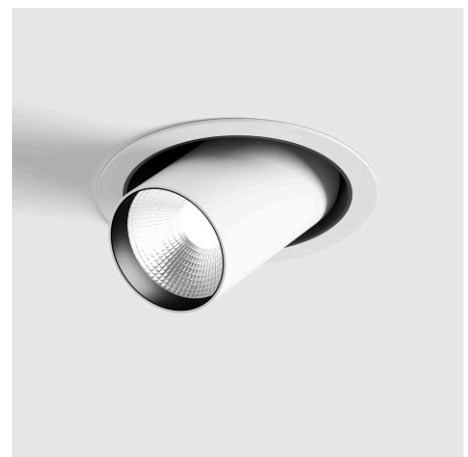

DIMENSIONS

