

Colour(Front ring) Standard Non-standard

- WHITE
- BLACK

IP rate Standard Non-standard

- IP20
- IP54

CCT Standard Non-standard

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 2700-6000K
- 1800-4000K
- DTW 1800-3000K

Control Standard Non-standard


- ON/OFF
- DALI
- 0/1-10V
- TRIAC
- BLUETOOTH
- ZIGBEE
- CASAMBI

Flexilight 30 trim

LED 5.5W/7W (CITIZEN LED)



LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
5.5W	7W	604lm	304lm	15°	3000K	> 90	36V 150mA
5.5W	7W	604lm	370lm	24°	3000K	> 90	36V 150mA
5.5W	7W	604lm	407lm	36°	3000K	> 90	36V 150mA
7W	9W	796lm	406lm	15°	3000K	> 90	36V 200mA
7W	9W	796lm	494lm	24°	3000K	> 90	36V 200mA
7W	9W	796lm	543lm	36°	3000K	> 90	36V 200mA

Light Distribution

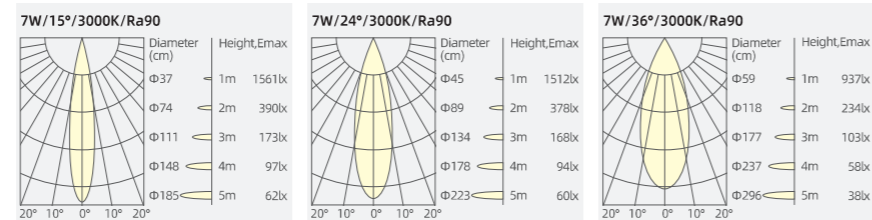

Optical Accessories

When E01 is selected, the protection level is IP20;
 Choosing E02, E03, or E04 can achieve IP54 protection level;
 You can choose one or both: E01+E02, E01+E03, or E01+E04.

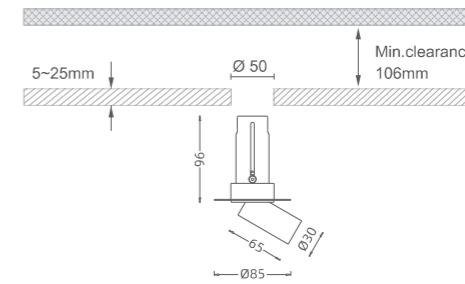

Colour(Front ring) Standard Non-standard

- WHITE
- BLACK

IP rate Standard Non-standard

- IP20
- IP54

CCT Standard Non-standard

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 2700-6000K
- 1800-4000K
- DTW 1800-3000K

Control Standard Non-standard


- ON/OFF
- DALI
- 0/1-10V
- TRIAC
- BLUETOOTH
- ZIGBEE
- CASAMBI

Flexilight 30 trimless

LED 5.5W/5W (CITIZEN LED)


LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
5.5W	7W	604lm	304lm	15°	3000K	> 90	36V 150mA
5.5W	7W	604lm	370lm	24°	3000K	> 90	36V 150mA
5.5W	7W	604lm	407lm	36°	3000K	> 90	36V 150mA
7W	9W	796lm	406lm	15°	3000K	> 90	36V 200mA
7W	9W	796lm	494lm	24°	3000K	> 90	36V 200mA
7W	9W	796lm	543lm	36°	3000K	> 90	36V 200mA


Light Distribution

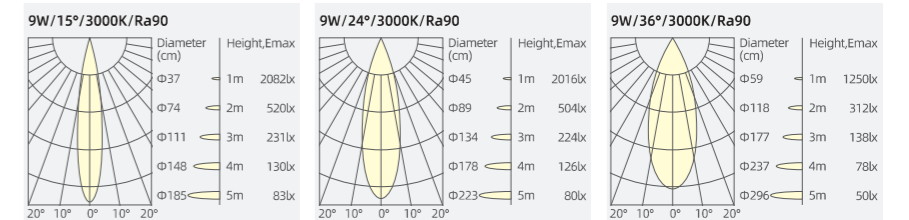

Optical Accessories

When E01 is selected, the protection level is IP20;
 Choosing E02, E03, or E04 can achieve IP54 protection level;
 You can choose one or both: E01+E02, E01+E03, or E01+E04.



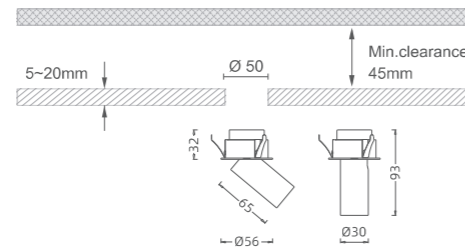

Colour(Front ring)

- Standard
- Non-standard
- WHITE
- BLACK

IP rate

- Standard
- Non-standard
- IP20
- IP54

CCT

- Standard
- Non-standard
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 2700-6000K
- 1800-4000K
- DTW 1800-3000K

Control


- Standard
- Non-standard
- ON/OFF
- DALI
- 0/1-10V
- TRIAC
- BLUETOOTH
- ZIGBEE
- CASAMBI

Flexilight 30 trim low

LED 5.5W/7W (CITIZEN LED)



LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
5.5W	7W	604lm	304lm	15°	3000K	>90	36V 150mA
5.5W	7W	604lm	370lm	24°	3000K	>90	36V 150mA
5.5W	7W	604lm	407lm	36°	3000K	>90	36V 150mA
7W	9W	796lm	406lm	15°	3000K	>90	36V 200mA
7W	9W	796lm	494lm	24°	3000K	>90	36V 200mA
7W	9W	796lm	543lm	36°	3000K	>90	36V 200mA

Light Distribution

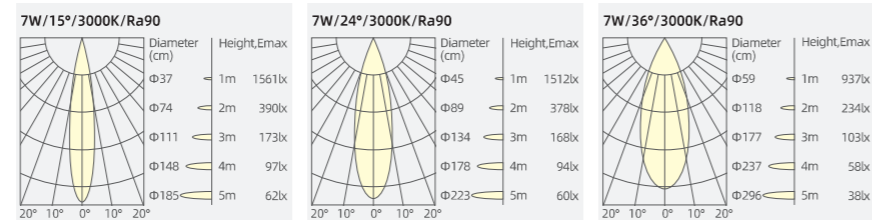

Optical Accessories

When E01 is selected, the protection level is IP20;
 Choosing E02, E03, or E04 can achieve IP54 protection level;
 You can choose one or both: E01+E02, E01+E03, or E01+E04.

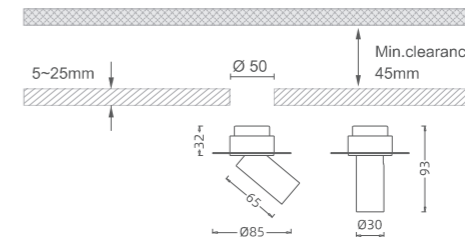

Colour(Front ring)

- Standard
- Non-standard
- WHITE
- BLACK

IP rate

- Standard
- Non-standard
- IP20
- IP54

CCT

- Standard
- Non-standard
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 2700-6000K
- 1800-4000K
- DTW 1800-3000K

Control


- Standard
- Non-standard
- ON/OFF
- DALI
- 0/1-10V
- TRIAC
- BLUETOOTH
- ZIGBEE
- CASAMBI

Flexilight 30 trimless low

LED 5.5W/5W (CITIZEN LED)


LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
5.5W	7W	604lm	304lm	15°	3000K	>90	36V 150mA
5.5W	7W	604lm	370lm	24°	3000K	>90	36V 150mA
5.5W	7W	604lm	407lm	36°	3000K	>90	36V 150mA
7W	9W	796lm	406lm	15°	3000K	>90	36V 200mA
7W	9W	796lm	494lm	24°	3000K	>90	36V 200mA
7W	9W	796lm	543lm	36°	3000K	>90	36V 200mA


Light Distribution

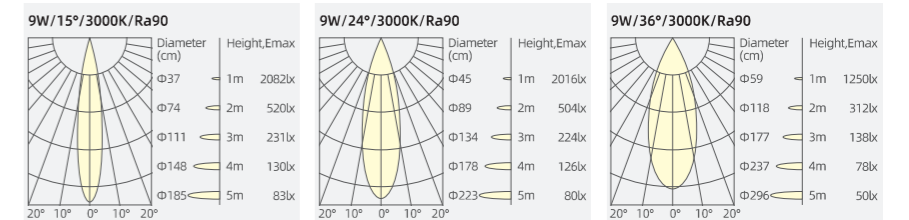

Optical Accessories

When E01 is selected, the protection level is IP20;
 Choosing E02, E03, or E04 can achieve IP54 protection level;
 You can choose one or both: E01+E02, E01+E03, or E01+E04.



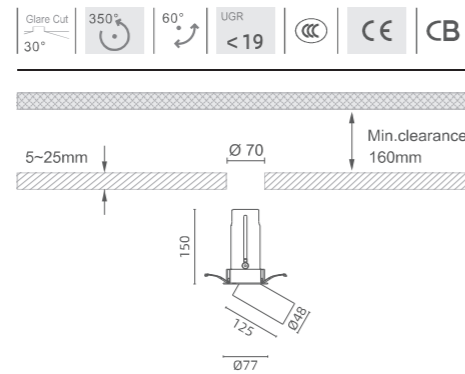


Flexilight 50 trim

LED 8.5W/10W/12W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
8.5W	10W	1067lm	570lm	15°	3000K	>90	34V 250mA
8.5W	10W	1067lm	637lm	24°	3000K	>90	34V 250mA
8.5W	10W	1067lm	599lm	36°	3000K	>90	34V 250mA
8.5W	10W	1067lm	539lm	55°	3000K	>90	34V 250mA
12W	14W	1650lm	877lm	15°	3000K	>90	34V 350mA
12W	14W	1650lm	980lm	24°	3000K	>90	34V 350mA
12W	14W	1650lm	922lm	36°	3000K	>90	34V 350mA
12W	14W	1650lm	830lm	55°	3000K	>90	34V 350mA

Light Distribution

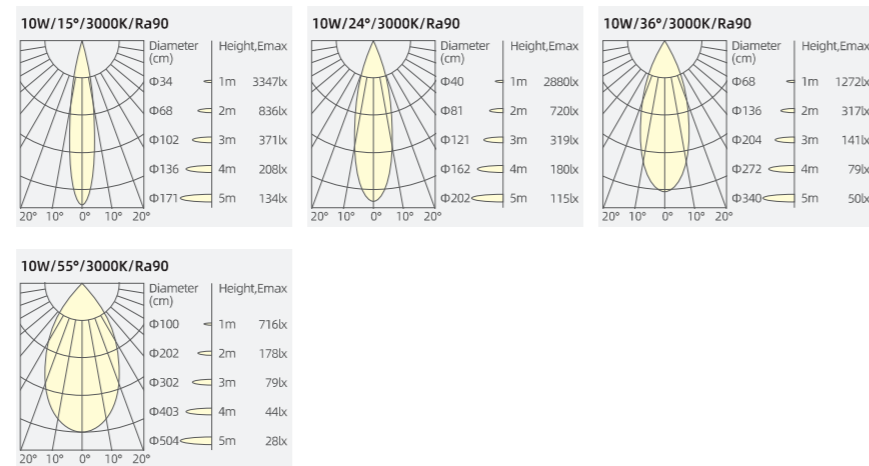

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT



- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○

Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.

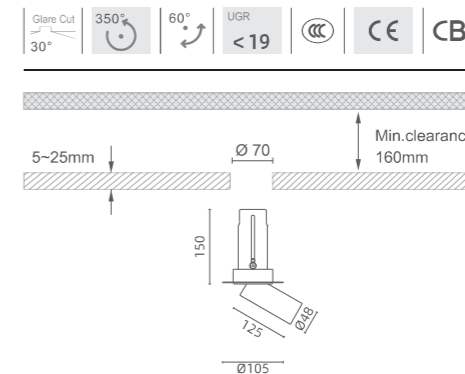


Flexilight 50 trimless

LED 8.5W/10W/12W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
8.5W	10W	1067lm	570lm	15°	3000K	>90	34V 250mA
8.5W	10W	1067lm	637lm	24°	3000K	>90	34V 250mA
8.5W	10W	1067lm	599lm	36°	3000K	>90	34V 250mA
8.5W	10W	1067lm	539lm	55°	3000K	>90	34V 250mA
12W	14W	1650lm	877lm	15°	3000K	>90	34V 350mA
12W	14W	1650lm	980lm	24°	3000K	>90	34V 350mA
12W	14W	1650lm	922lm	36°	3000K	>90	34V 350mA
12W	14W	1650lm	830lm	55°	3000K	>90	34V 350mA

Light Distribution

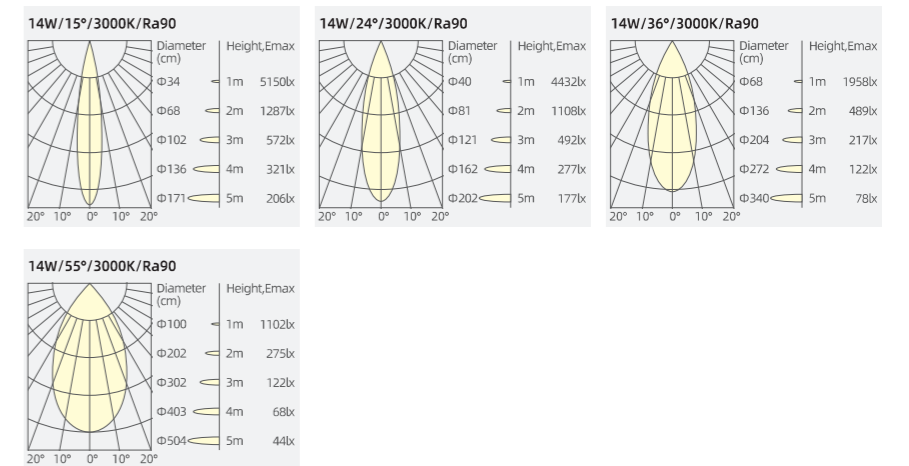

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT


- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○


Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.



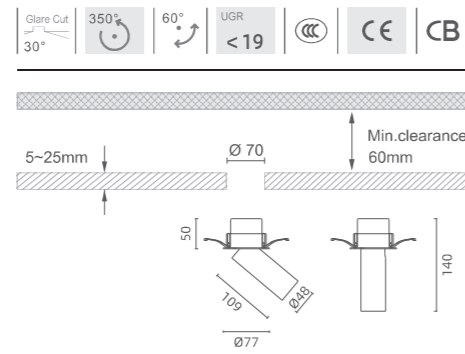


Flexilight 50 trim low

LED 8.5W/10W/12W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
8.5W	10W	1067lm	570lm	15°	3000K	>90	34V 250mA
8.5W	10W	1067lm	637lm	24°	3000K	>90	34V 250mA
8.5W	10W	1067lm	599lm	36°	3000K	>90	34V 250mA
8.5W	10W	1067lm	539lm	55°	3000K	>90	34V 250mA
12W	14W	1650lm	877lm	15°	3000K	>90	34V 350mA
12W	14W	1650lm	980lm	24°	3000K	>90	34V 350mA
12W	14W	1650lm	922lm	36°	3000K	>90	34V 350mA
12W	14W	1650lm	830lm	55°	3000K	>90	34V 350mA

Light Distribution

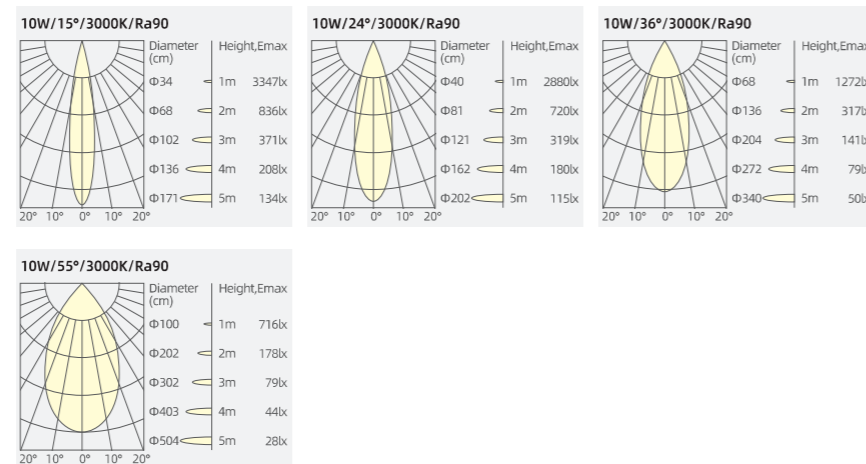

Colour(Front ring)

- WHITE Standard
- BLACK Non-standard

IP rate

- IP20 Standard
- IP54 Non-standard

CCT




- 2700K Standard
- 3000K Non-standard
- 3500K Non-standard
- 4000K Non-standard
- 5000K Non-standard
- 2700-6000K Non-standard
- 1800-4000K Non-standard
- DTW 1800-3000K Non-standard

Control

- ON/OFF Standard
- DALI Non-standard
- 0/1-10V Non-standard
- TRIAC Non-standard
- BLUETOOTH Non-standard
- ZIGBEE Non-standard
- CASAMBI Non-standard

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.

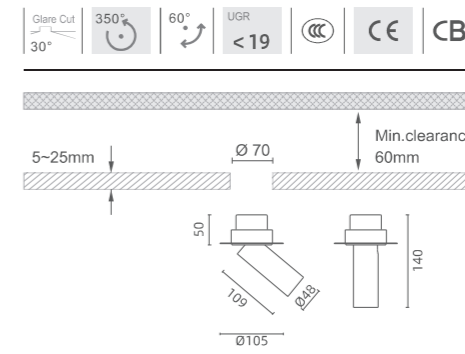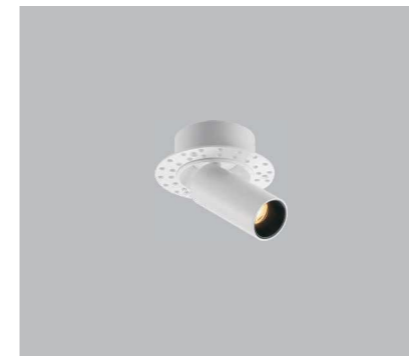

Flexilight 50 trimless

LED 8.5W/10W/12W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
8.5W	10W	1067lm	570lm	15°	3000K	>90	34V 250mA
8.5W	10W	1067lm	637lm	24°	3000K	>90	34V 250mA
8.5W	10W	1067lm	599lm	36°	3000K	>90	34V 250mA
8.5W	10W	1067lm	539lm	55°	3000K	>90	34V 250mA
12W	14W	1650lm	877lm	15°	3000K	>90	34V 350mA
12W	14W	1650lm	980lm	24°	3000K	>90	34V 350mA
12W	14W	1650lm	922lm	36°	3000K	>90	34V 350mA
12W	14W	1650lm	830lm	55°	3000K	>90	34V 350mA

Light Distribution



Colour(Front ring)

- WHITE Standard
- BLACK Non-standard

IP rate

- IP20 Standard
- IP54 Non-standard

CCT


- 2700K Standard
- 3000K Non-standard
- 3500K Non-standard
- 4000K Non-standard
- 5000K Non-standard
- 2700-6000K Non-standard
- 1800-4000K Non-standard
- DTW 1800-3000K Non-standard


Control

- ON/OFF Standard
- DALI Non-standard
- 0/1-10V Non-standard
- TRIAC Non-standard
- BLUETOOTH Non-standard
- ZIGBEE Non-standard
- CASAMBI Non-standard

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.



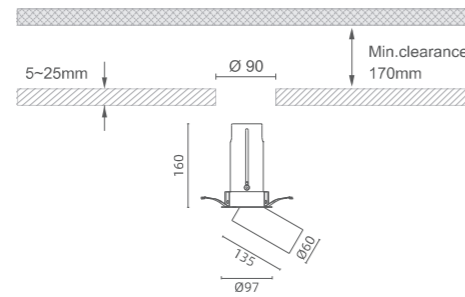


Flexilight 60 trim

LED 18W/20.5W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
18W	20W	2343lm	1569lm	15°	3000K	>90	34V 500mA
18W	20W	2343lm	1639lm	24°	3000K	>90	34V 500mA
18W	20W	2343lm	1681lm	36°	3000K	>90	34V 500mA
18W	20W	2343lm	1592lm	50°	3000K	>90	34V 500mA
20.5W	25W	2569lm	1857lm	15°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1956lm	24°	3000K	>90	34V 600mA
20.5W	25W	2569lm	2016lm	36°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1945lm	50°	3000K	>90	34V 600mA

Light Distribution

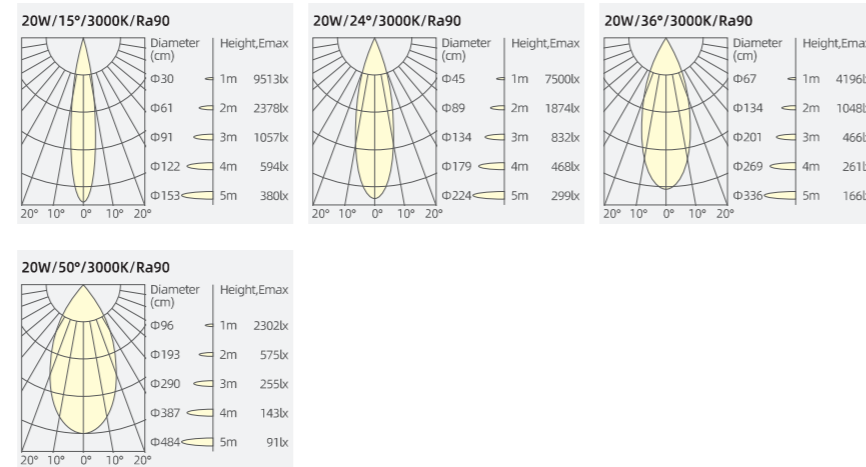

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT



- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○

Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.

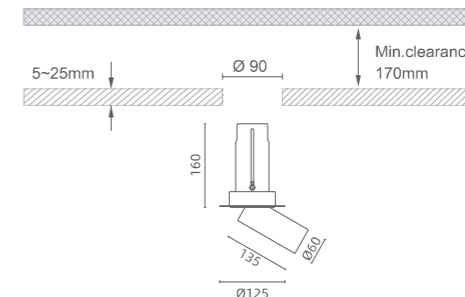


Flexilight 60 trimless

LED 18W/20.5W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
18W	20W	2343lm	1569lm	15°	3000K	>90	34V 500mA
18W	20W	2343lm	1639lm	24°	3000K	>90	34V 500mA
18W	20W	2343lm	1681lm	36°	3000K	>90	34V 500mA
18W	20W	2343lm	1592lm	50°	3000K	>90	34V 500mA
20.5W	25W	2569lm	1857lm	15°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1956lm	24°	3000K	>90	34V 600mA
20.5W	25W	2569lm	2016lm	36°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1945lm	50°	3000K	>90	34V 600mA

Light Distribution

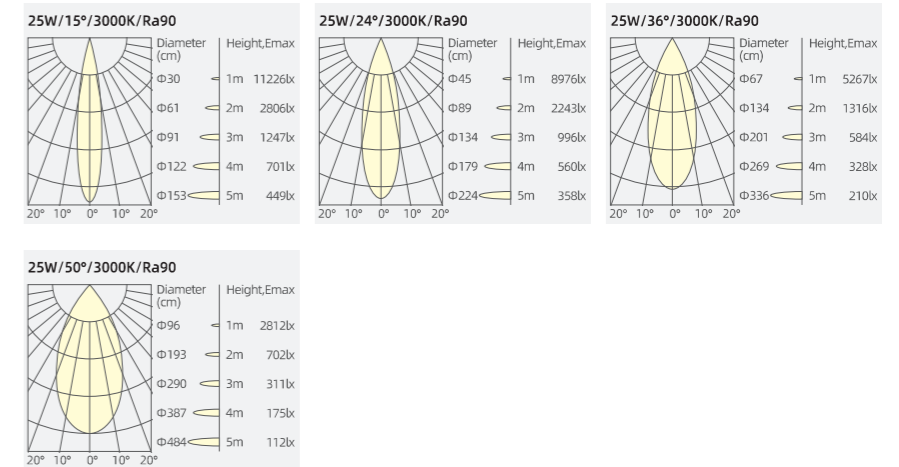

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT


- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○


Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.



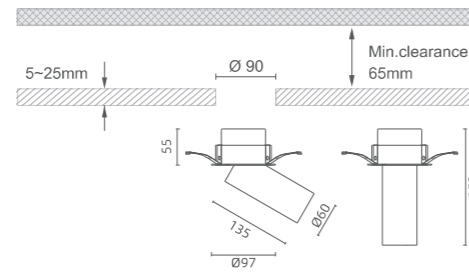

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT


- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○

Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.






Flexilight 60 trim low

LED 18W/20.5W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
18W	20W	2343lm	1569lm	15°	3000K	>90	34V 500mA
18W	20W	2343lm	1639lm	24°	3000K	>90	34V 500mA
18W	20W	2343lm	1681lm	36°	3000K	>90	34V 500mA
18W	20W	2343lm	1592lm	50°	3000K	>90	34V 500mA
20.5W	25W	2569lm	1857lm	15°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1956lm	24°	3000K	>90	34V 600mA
20.5W	25W	2569lm	2016lm	36°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1945lm	50°	3000K	>90	34V 600mA

Light Distribution

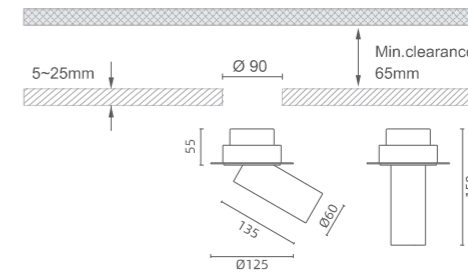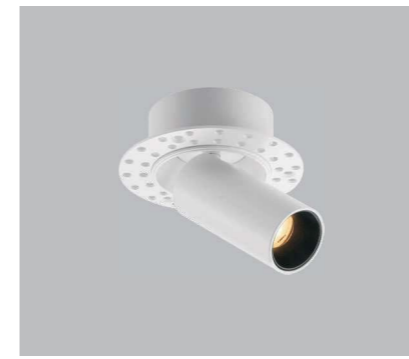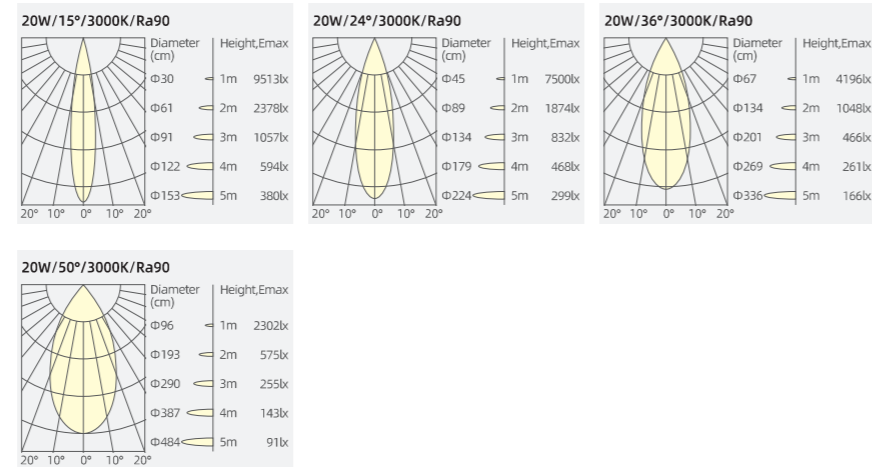

Colour(Front ring)

- Standard
- Non-standard
- WHITE ●
- BLACK ●

IP rate

- Standard
- Non-standard
- IP20 ●
- IP54 ●

CCT


- Standard
- Non-standard
- 2700K ●
- 3000K ●
- 3500K ●
- 4000K ●
- 5000K ●
- 2700-6000K ●
- 1800-4000K ○
- DTW 1800-3000K ○

Control

- Standard
- Non-standard
- ON/OFF ●
- DALI ●
- 0/1-10V ●
- TRIAC ●
- BLUETOOTH ○
- ZIGBEE ○
- CASAMBI ○

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.



Flexilight 60 trimless low

LED 18W/20.5W (CITIZEN LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
18W	20W	2343lm	1569lm	15°	3000K	>90	34V 500mA
18W	20W	2343lm	1639lm	24°	3000K	>90	34V 500mA
18W	20W	2343lm	1681lm	36°	3000K	>90	34V 500mA
18W	20W	2343lm	1592lm	50°	3000K	>90	34V 500mA
20.5W	25W	2569lm	1857lm	15°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1956lm	24°	3000K	>90	34V 600mA
20.5W	25W	2569lm	2016lm	36°	3000K	>90	34V 600mA
20.5W	25W	2569lm	1945lm	50°	3000K	>90	34V 600mA

Light Distribution

