

# INSIGHT BALL

SYSTEM INSIGHT



**Application:** offices, shops, entrance lobbies, apartments

**Housing:** cast aluminum

**Power** electronic, 48V, to be ordered



**Supply:** separately

**Other:** input voltage - 48V DC, DIM version with built-in dimmer in the power cable



## TECHNICAL DATA

Luminaire power	7 - 31 [W]
Luminaire luminous flux	350 - 2400 [lm]
Type of diffuser/plate	PLX
Distribution angle	120°, 284°
Color temperature	3000 K, 4000 K
Color rendering index	80
Lifetime Lxx Bxx	L70B50@60.000h
Diameter D	100, 180 mm
The color of the housing	White RAL9016, Black RAL9005
IP	IP20
Type of control	ON/OFF, DALI, Casambi, PHASE CUT / TRIAC
Supply voltage	48V DC

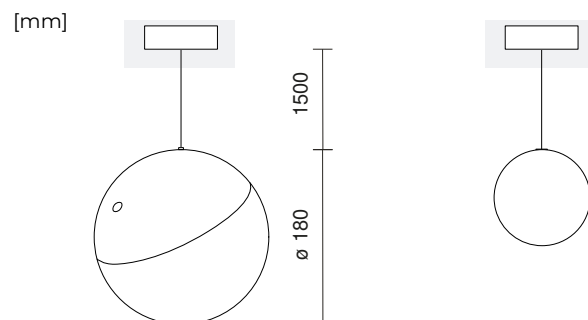

The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.