


INSIGHT DARK LIGHT FLEXX

SYSTEM INSIGHT

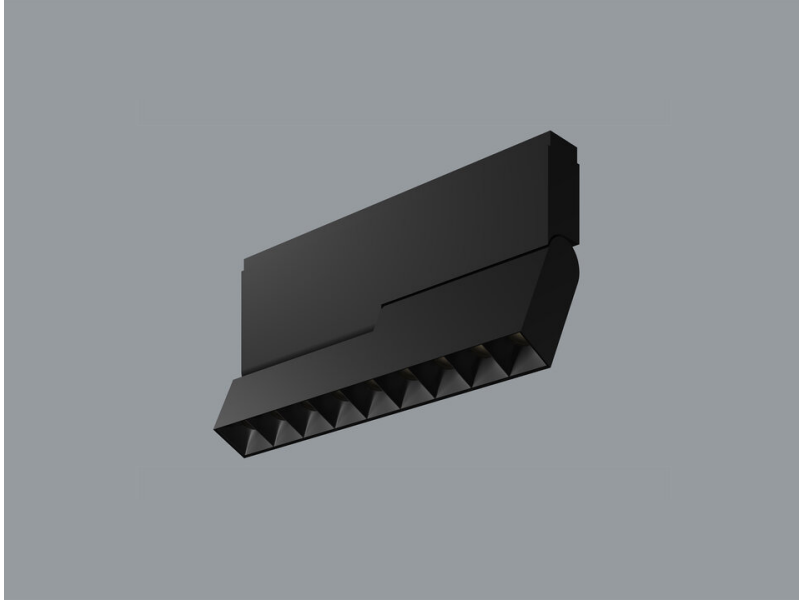

Application: offices, shops, entrance lobbies, apartments

Housing: cast aluminum

Power: electronic, 48V, to be ordered



Supply: separately

Other: input voltage - 48V DC



TECHNICAL DATA

Luminaire power	12 [W]
Luminaire luminous flux	870 - 940 [lm]
Type of diffuser/plate	Darklight
Distribution angle	35°
Color temperature	3000 K, 4000 K
Color rendering index	80
Lifetime Lxx Bxx	L70B50@60.000h
Length L	205 mm
The color of the housing	White RAL9016, Black RAL9005
IP	IP20
Type of control	ON/OFF, DALI, Casambi
Supply voltage	48V DC

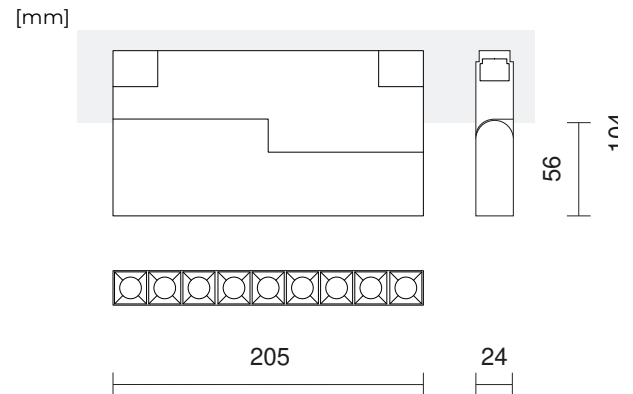

The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.