


SIMPLE

LED COB adjustable track light



SIZE LINEUP



55 Shine 65 Shine

[Beam Angle] ■ Extra Narrow ■ Narrow ■ Medium ■ Wide ■ Extra wide
[CCT] ○ 5000K ○ 4000K ○ 3500K ○ 3000K ○ 2700K




LED COB adjustable track light



SIMPLE

LED COB adjustable track light



Colour(Front ring) Standard Non-standard

WHITE
 BLACK

IP rate Standard Non-standard

IP20
 IP54

CCT Standard Non-standard


2700K
 3000K
 3500K
 4000K
 5000K
 2700-6000K

Control Standard Non-standard

ON/OFF
 DALI
 0/1-10V
 TRIAC
 BLUETOOTH
 ZIGBEE
 CASAMBI

Optical Accessories

When E01 is selected, the protection level is IP20; Choosing E02, E03, or E04 can achieve IP54 protection level; You can choose one or both: E01+E02, E01+E03, or E01+E04.




SIMPLE 12620

LED 4.5W/6.5W/8W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|-----------|
| 4.5W | 5W | 512lm | 351lm | 15° | 3000K | > 90 | 32V 150mA |
| 4.5W | 5W | 512lm | 390lm | 24° | 3000K | > 90 | 32V 150mA |
| 4.5W | 5W | 512lm | 369lm | 36° | 3000K | > 90 | 32V 150mA |
| 8W | 9W | 822lm | 585lm | 15° | 3000K | > 90 | 32V 250mA |
| 8W | 9W | 822lm | 650lm | 24° | 3000K | > 90 | 32V 250mA |
| 8W | 9W | 822lm | 615lm | 36° | 3000K | > 90 | 32V 250mA |

Light Distribution

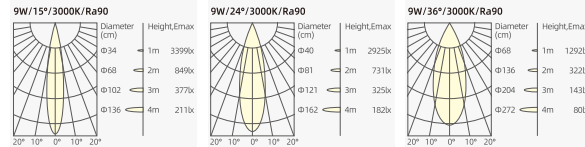


Colour(Reflector)

Standard
 Non-standard



LED COB adjustable track light



Colour(Front ring) Standard Non-standard

WHITE
 BLACK

IP rate Standard Non-standard

IP20
 IP54

CCT Standard Non-standard


2700K
 3000K
 3500K
 4000K
 5000K
 2700-6000K

Control Standard Non-standard

ON/OFF
 DALI
 0/1-10V
 TRIAC
 BLUETOOTH
 ZIGBEE
 CASAMBI

Optical Accessories

When E01 is selected, the protection level is IP20; Choosing E02, E03, or E04 can achieve IP54 protection level; You can choose one or both: E01+E02, E01+E03, or E01+E04.





SIMPLE 10440

LED 5W/7W/8.5W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|-----------|
| 7W | 8W | 922lm | 318lm | 8° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 922lm | 671lm | 15° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 922lm | 694lm | 24° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 922lm | 716lm | 36° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 922lm | 564lm | 60° | 3000K | > 90 | 34V 200mA |
| 8.5W | 10W | 1067lm | 750lm | 8° | 3000K | > 90 | 34V 250mA |
| 8.5W | 10W | 1067lm | 768lm | 15° | 3000K | > 90 | 34V 250mA |
| 8.5W | 10W | 1067lm | 797lm | 24° | 3000K | > 90 | 34V 250mA |
| 8.5W | 10W | 1067lm | 813lm | 36° | 3000K | > 90 | 34V 250mA |
| 8.5W | 10W | 1067lm | 747lm | 60° | 3000K | > 90 | 34V 250mA |

Light Distribution

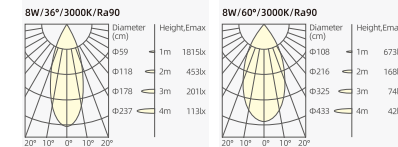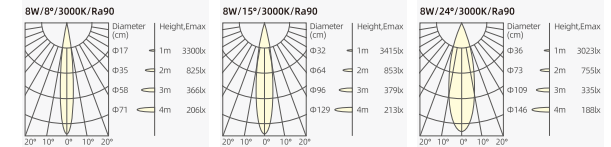


Colour(Reflector)

Standard
 Non-standard




SIMPLE

LED COB adjustable track light



Glare Cut 30° 355° 90° UGR < 19 CE CB

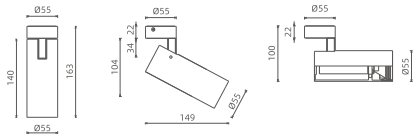

Colour(Front ring) Standard Non-standard

WHITE
 BLACK

IP rate Standard Non-standard

IP20
 IP54

CCT Standard Non-standard



2700K
 3000K
 3500K
 4000K
 5000K
 2700-6000K

SIMPLE 10010

LED 7W/8.5W/10W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|-----------|
| 7W | 8W | 992lm | 318lm | 8° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 992lm | 671lm | 15° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 992lm | 694lm | 24° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 992lm | 716lm | 36° | 3000K | > 90 | 34V 200mA |
| 7W | 8W | 992lm | 564lm | 60° | 3000K | > 90 | 34V 200mA |
| 10W | 12W | 1334lm | 992lm | 15° | 3000K | > 90 | 34V 300mA |
| 10W | 12W | 1334lm | 1034lm | 24° | 3000K | > 90 | 34V 300mA |
| 10W | 12W | 1334lm | 1068lm | 36° | 3000K | > 90 | 34V 300mA |
| 10W | 12W | 1334lm | 868lm | 60° | 3000K | > 90 | 34V 300mA |

Light Distribution

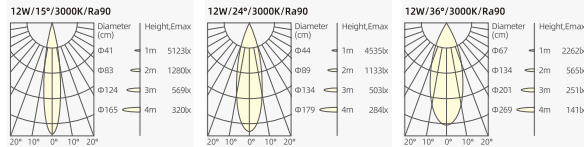


Control Standard Non-standard

ON/OFF
 DALI
 0/1-10V
 TRIAC
 BLUETOOTH
 ZIGBEE
 CASAMBI

Optical Accessories

When E01 is selected, the protection level is IP20; Choosing E02, E03, or E04 can achieve IP54 protection level; You can choose one or both: E01+E02, E01+E03, or E01+E04.




Colour(Reflector)

Standard Non-standard Tube

LED COB adjustable track light



Glare Cut 30° 355° 90° UGR < 19 CE CB

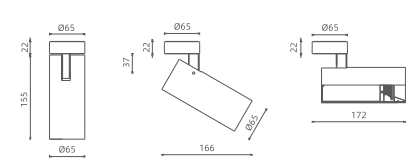

Colour(Front ring) Standard Non-standard

WHITE
 BLACK

IP rate Standard Non-standard

IP20
 IP54

CCT Standard Non-standard



2700K
 3000K
 3500K
 4000K
 5000K
 2700-6000K

SIMPLE 10020

LED 10W/13W/17W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|-----------|
| 13W | 15W | 1650lm | 1231lm | 15° | 3000K | > 90 | 34V 350mA |
| 13W | 15W | 1650lm | 1181lm | 24° | 3000K | > 90 | 34V 350mA |
| 13W | 15W | 1650lm | 1209lm | 36° | 3000K | > 90 | 34V 350mA |
| 13W | 15W | 1650lm | 1078lm | 60° | 3000K | > 90 | 34V 350mA |
| 17W | 20W | 2343lm | 1697lm | 15° | 3000K | > 90 | 34V 500mA |
| 17W | 20W | 2343lm | 1629lm | 24° | 3000K | > 90 | 34V 500mA |
| 17W | 20W | 2343lm | 1636lm | 36° | 3000K | > 90 | 34V 500mA |
| 17W | 20W | 2343lm | 1503lm | 60° | 3000K | > 90 | 34V 500mA |

Light Distribution

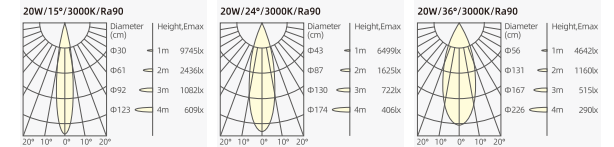


Control Standard Non-standard

ON/OFF
 DALI
 0/1-10V
 TRIAC
 BLUETOOTH
 ZIGBEE
 CASAMBI

Optical Accessories

When E01 is selected, the protection level is IP20; Choosing E02, E03, or E04 can achieve IP54 protection level; You can choose one or both: E01+E02, E01+E03, or E01+E04.




Colour(Reflector)

Standard Non-standard Tube

SIMPLE

LED COB adjustable track light

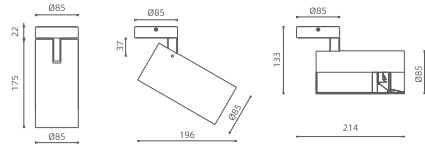

Colour(Front ring)

- Standard
- Non-standard

WHITE
BLACK

- Standard
- Non-standard

IP rate

- Standard
- Non-standard

IP20
IP54

- Standard
- Non-standard

CCT

- Standard
- Non-standard

2700K
3000K
3500K
4000K
5000K
2700-6000K

- Standard
- Non-standard

Control


- Standard
- Non-standard

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

- Standard
- Non-standard

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.




SIMPLE 10030

LED 17W/21W/25.5W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|-----------|
| 21W | 25W | 2569lm | 2149lm | 15° | 3000K | > 90 | 34V 600mA |
| 21W | 25W | 2569lm | 2194lm | 24° | 3000K | > 90 | 34V 600mA |
| 21W | 25W | 2569lm | 2050lm | 36° | 3000K | > 90 | 34V 600mA |
| 21W | 25W | 2569lm | 1799lm | 60° | 3000K | > 90 | 34V 600mA |
| 25.5W | 30W | 2940lm | 2529lm | 15° | 3000K | > 90 | 34V 700mA |
| 25.5W | 30W | 2940lm | 2474lm | 24° | 3000K | > 90 | 34V 700mA |
| 25.5W | 30W | 2940lm | 2427lm | 36° | 3000K | > 90 | 34V 700mA |
| 25.5W | 30W | 2940lm | 2068lm | 60° | 3000K | > 90 | 34V 700mA |

Light Distribution

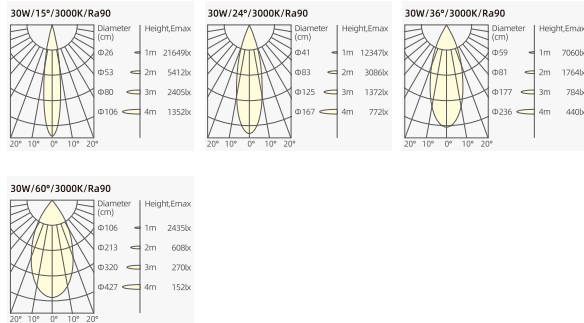


Colour(Reflector)

- Standard
- Non-standard



LED COB adjustable track light

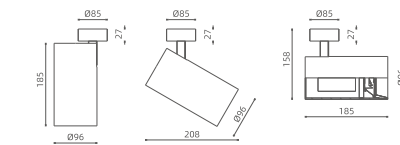

Colour(Front ring)

- Standard
- Non-standard

WHITE
BLACK

- Standard
- Non-standard

IP rate

- Standard
- Non-standard

IP20
IP54

- Standard
- Non-standard

CCT

- Standard
- Non-standard

2700K
3000K
3500K
4000K
5000K
2700-6000K

- Standard
- Non-standard

Control


- Standard
- Non-standard

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

- Standard
- Non-standard

Optical Accessories

When E01 is selected, the protection level is IP20;
Choosing E02, E03, or E04 can achieve IP54 protection level;
You can choose one or both: E01+E02, E01+E03, or E01+E04.




SIMPLE 10040

LED 30.5W/34W (CITIZEN LED)

| LED Power | System Power | LED Output | System Output | Beam | CCT | CRI | Drive |
|-----------|--------------|------------|---------------|------|-------|------|------------|
| 30.5W | 35W | 3974lm | 3033lm | 15° | 3000K | > 90 | 34V 900mA |
| 30.5W | 35W | 3974lm | 2979lm | 24° | 3000K | > 90 | 34V 900mA |
| 30.5W | 35W | 3974lm | 2995lm | 36° | 3000K | > 90 | 34V 900mA |
| 30.5W | 35W | 3974lm | 2986lm | 60° | 3000K | > 90 | 34V 900mA |
| 34W | 40W | 4548lm | 3388lm | 15° | 3000K | > 90 | 34V 1050mA |
| 34W | 40W | 4548lm | 3333lm | 24° | 3000K | > 90 | 34V 1050mA |
| 34W | 40W | 4548lm | 3379lm | 36° | 3000K | > 90 | 34V 1050mA |
| 34W | 40W | 4548lm | 3482lm | 60° | 3000K | > 90 | 34V 1050mA |

Light Distribution

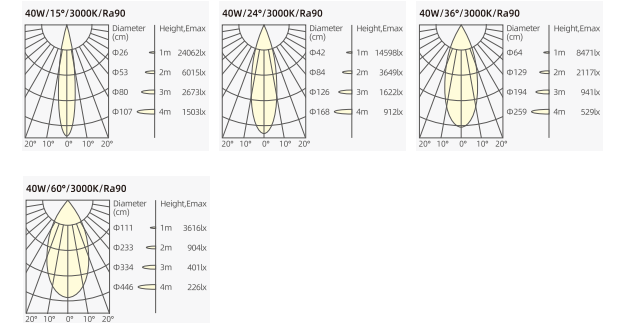

Colour(Reflector)

- Standard
- Non-standard

