

MT15 Series

Suspended
light BELL
M15-SU04



Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

24°/36°

COLOUR(housing)

Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
8W	48V/24V	3000K/3500K/4000K	420 lm(110° 3000K)

LUMINOUS FLUX

LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
8W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF,
Tuya Zigbee
0-10V,
Phase DIM,
DALI DIM

PHYSICAL

Aluminum



Physical photos



Available Colors




White



Golden

Light effect

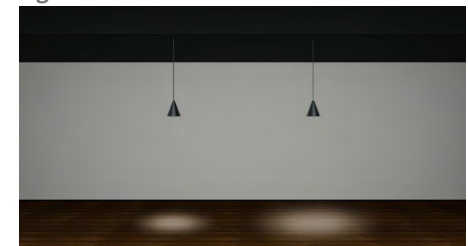

Technical drawing

