

MT15 Series

Anti-glare
GrilleLight COMFORT
M15-CG06;M15-CG12

Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

36°/45°

COLOUR(housing)

Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
6W	48V/24V	3000K/3500K/4000K	408lm(36° 3000K)
12W	48V/24V	3000K/3500K/4000K	821 lm(36° 3000K)

LUMINOUS FLUX

BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

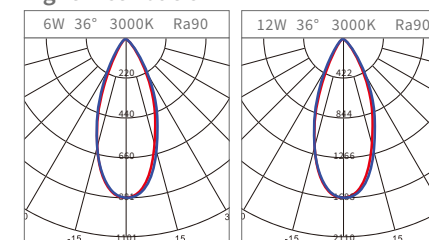

Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
6W,12W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM<3

OPTICAL

Direct illumination
Beam angle 36°/45°
Optical accessories

ELECTRICAL

ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



M15-CG06 6W



M15-CG12 12W

Available Colors




White




Golden


Light effect

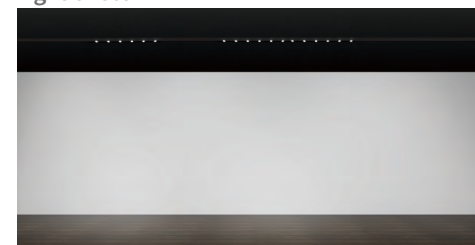

Technical drawing



M15-CG06 6W



M15-CG12 12W