


MT15 Series

Cylindrical shape
M15-SP0006;M15-SP0007

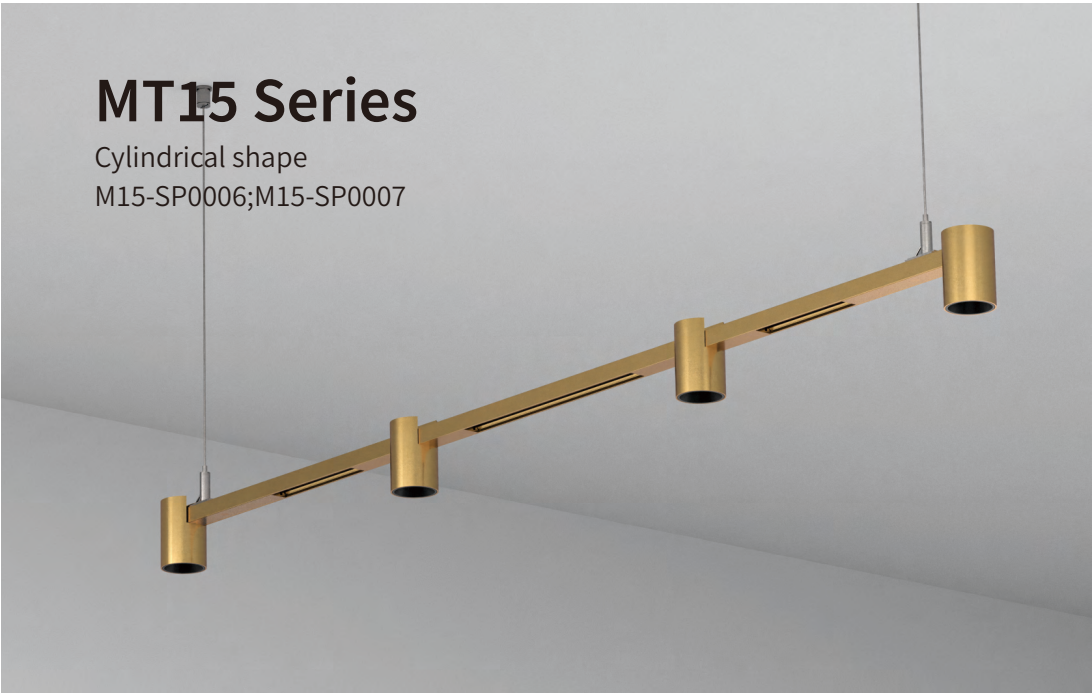

Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
5W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF,
Tuya Zigbee
0-10V,
Phase DIM,
DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



M15-SP0006 5W



M15-SP0007 5W

Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF



Beam angle

24°/36°

COLOUR(housing)

Black
White

Technical drawing



Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
5W	48V/24V	3000K/3500K/4000K	420 lm

LUMINOUS FLUX

LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Buyers show



Available Colors



White



Golden

MT15 Series

Cylindrical shape
M15-SP0008



Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
7W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF,
Tuya Zigbee
0-10V,
Phase DIM,
DALI DIM

PHYSICAL

Aluminum



RoHS



Physical photos



M15-SP0008 7W

Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

24°/36°

COLOUR(housing)

Black
White

Technical drawing



M15-SP0008 7W

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
7W	48V/24V	3000K/3500K/4000K	680lm

LUMINOUS FLUX

LEDTEEN COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Buyers show



Available Colors



White



Golden

