



MT15 Series

Adjustable Grille Light
DARKLIGHT
DARKLIGHT FLEX
M15-GO08

Standard configuration


COLOUR TEMPERATURE
3000K 3500K 4000K
CONTROL
ON/OFF
Beam angle
24°/36°
COLOUR(housing)
Black White

Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
8W	48V/24V	3000K/3500K/4000K	661 lm(24° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Quickinfo

GENERAL
Magnetic suction installation IP20
LED
BRIDGELUX 8W 3000K, 3500K, 4000K 50000h@L80 CRI ≥ 90 SDCM< 3
OPTICAL
Direct illumination Beam angle 24°/36° Optical accessories
ELECTRICAL
ON/OFF, Tuya Zigbee 0-10V, Phase DIM, DALI DIM
PHYSICAL
Aluminum




Physical photos



Available Colors



Light effect

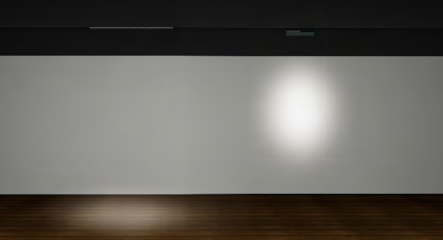

Technical drawing

