



CL452
Recessed



DL452B-20W
Recessed

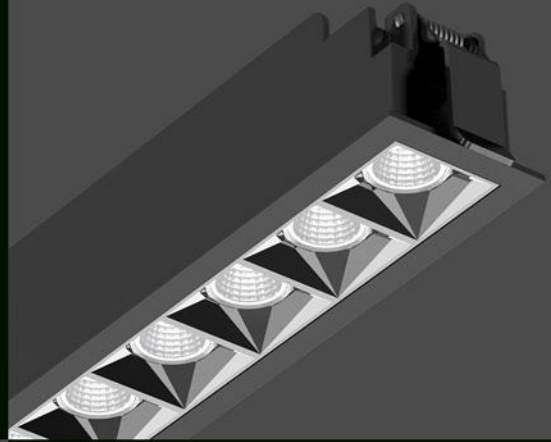

DL452B-16W
Recessed

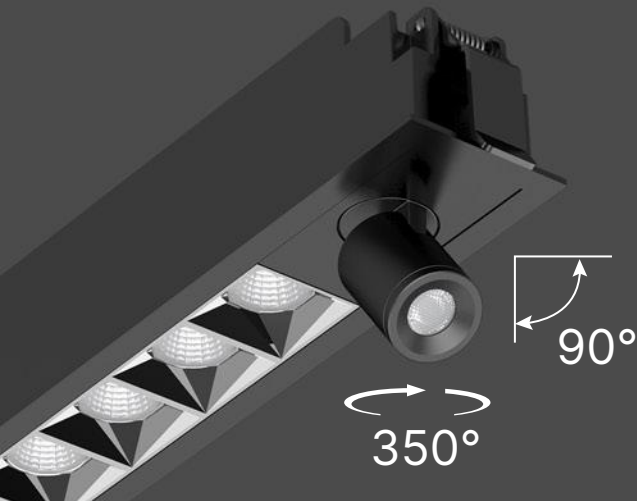

DL452A
Surface mount



+

UGR<19






FEATURES

- Modular design
- Fixed design interchange to tilted design
- Bright Silver, Golden, Black reflector options
- 2CCT interchangeable by external slide switch
- IP54 below ceiling
- External flicker free driver


TECHNICAL

Materials of Optics	PC
Materials of Housing	Die-Casting Aluminium
Light Source	SMD (SDCM<6)
Color Temperature	2700K/3000K/4000K
Luminous Efficiency@4000K	90lm/w
CRI	≥90
Beam Angle(°)	30°/45°
UGR	<19
Glow wire test (°C)	750°C
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/Black RAL9005
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	≥0.9
Certification	CE/SAA/RoHS

OPTICS

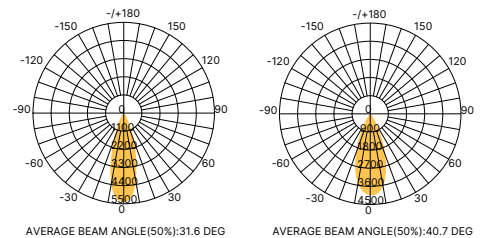

DIMENSION

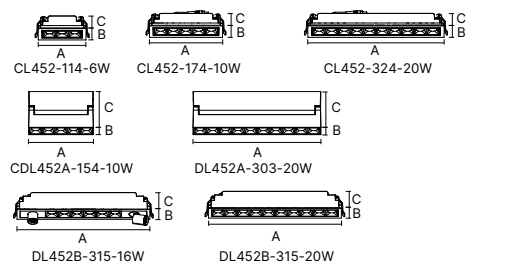

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	Cutout (mm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL452-114-6W	6W	AC220-240	114x53x42	106x47	550lm	0.250	36PCS
CL452-174-10W	10W	AC220-240	174x53x42	166x47	920lm	0.330	24PCS
CL452-324-20W	20W	AC220-240	324x53x42	316x47	1830lm	0.510	18PCS
DL452A-154-10W	10W	AC220-240	154x34x100	-	920lm	0.450	18PCS
DL452A-303-20W	20W	AC220-240	303x34x100	-	1850lm	0.765	12PCS
DL452B-315-16W	16W	AC220-240	315x45x71	307x37	1350lm	0.580	12PCS
DL452B-315-20W	20W	AC220-240	315x45x51	307x37	1850lm	0.530	12PCS