

MT15 Series

Flood Linear Light

LINE

M15-FL30;M15-FL60;

Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

110°

COLOUR(housing)

Black
White


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
6W	48V/24V	3000K/3500K/4000K	600 lm(110° 3000K)
12W	48V/24V	3000K/3500K/4000K	1200lm(110° 3000K)

LUMINOUS FLUX

BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

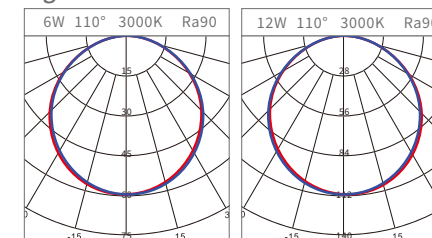

Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
6W,12W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3

OPTICAL

Direct illumination
Beam angle 110°
Optical accessories

ELECTRICAL


ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM

PHYSICAL

Aluminum




Physical photos



Available Colors



Light effect

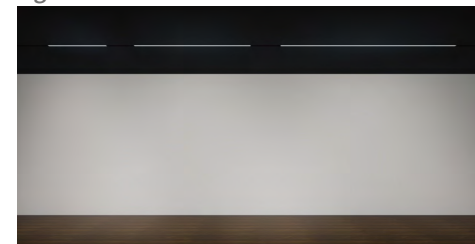

Technical drawing

