


Linear Twin Spots

- IP21
- Class III
- Ceiling Recessed
- Anti glare hazard UGR<19
- RG1 | Blue light
- 64x37mm
- Attamento riciclabile Highly recyclable
- FSC Package

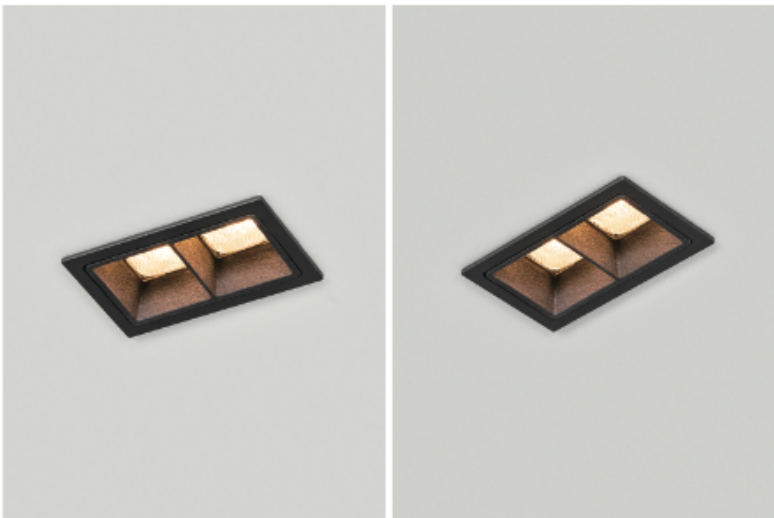


6W twin spots downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL6103	6W	150mA 36V	423lm	≥90	50.000h L90B10

Finish	LED CCT	Beam
Powder Coat	2700K	40°
Liquid Paint	3000K	60°
Anodize	4000K	80°

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year



Light Distribution for 3000K		
wide 80°		
h(m)	E(lx)	ø(m)
1	332.7	ø1.36
2	83.18	ø2.73
3	36.97	ø4.10
4	20.80	ø5.47
5	13.31	ø6.83

Gear
This product is supplied without gear.

Linear Quater Spots

- IP21
- Class III
- Ceiling Recessed
- Anti glare hazard
UGR<19
- RG1 | Blue light
- 63x63mm
- Altamente riciclabile
Highly recyclable
- FSC
Package




8W 4 Spots Linear Downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL6104	8W	200mA 36V	570lm	≥90	50.000h L90B20

Finish	LED CCT	Beam
Powder Coat	2700K	40°
Liquid Paint	3000K	60°
Anodize	4000K	80°

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year



Light Distribution for 3000K

wide 80°

h(m)	E(lx)	ø(m)
1	487.6	ø1.36
2	116.9	ø2.73
3	51.95	ø4.09
4	29.22	ø5.46
5	18.70	ø6.82

Gear
This product is supplied without gear.

Linear Spots 5

- IP21
- Class III
- Ceiling Recessed
- Anti glare hazard
UGR<19
- RG1 | Blue light
- 115x37mm
- Altamente riciclabile
Highly recyclable
- FSC
Package




10W 5 spots Linear Downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL6098	10W	250mA 36V	721lm	≥90	50.000h L90B20

Finish	LED CCT	Beam
Powder Coat	2700K	40°
Liquid Paint	3000K	60°
Anodize	4000K	80°

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year



Light Distribution for 3000K

wide 80°


h(m)	E(lx)	σ(m)
1	571.2	ø1.33
2	142.8	ø2.67
3	63.47	ø4.00
4	35.70	ø5.34
5	22.85	ø6.68

Gear

This product is supplied without gear.

Linear Spots 9

- IP21
- Class II
- Ceiling Recession
- Anti-glare hazard
UGR<19
- RG1 (Blue light)
- Roofdown
- Alternately available
highly mountable
- FCC
Package




15W 9 spots Linear Downlight

Code	System Power	LED Power	Lumen(40° 3000K)	CRI	Lifetime (Ta 25°C)
DLR105	15W	350mA 36V	1200lm	≥80	50,000h(L80B10)
Finish					
Powder Coat	2700K	40°	Key Information		
Liquid Paint	3000K	60°			
Anodize	4000K	80°			
			Material	Aluminum	
			Mounting	Ceiling Surface	
			Warranty	5 Year	
Light Distribution for 3000K					
Narrow 40°					
h(m)	Beam	d(m)	Gear		
1	2355	ø0.45			
2	4710	ø0.90			
3	7065	ø1.35			
4	9420	ø1.80			
5	11775	ø2.25			

Linear Spots 10

- IP21
- Class II
- Ceiling Recession
- Anti-glare hazard
UGR<19
- RG1 (Blue light)
- Roofdown
- Alternately available
highly mountable
- FCC
Package



20W 10 spots linear downlight

Code	System Power	LED Power	Lumen(40° 3000K)	CRI	Lifetime (Ta 25°C)
DL6106	18W	300mA 36V	1620lm	≥90	50,000h(L80B3)
Finish					
	LED CCT	Beam	Key Information		
Powder Coat	2700K	40°	Material	Aluminum	
Liquid Paint	3000K	60°	Mounting	Ceiling Surface	
Anodize	4000K	80°	Warranty	5 Year	
Light Distribution for 3000K					
Narrow 40°					
h(m)	Beam	d(m)	Gear		
1	4892	ø0.64			
2	9785	ø1.28			
3	14677	ø1.92			
4	19570	ø2.56			
5	24462	ø3.19			
This product is supplied without gear.					