



MT15 Series

Spotlight double
M15-DS20;M15-DS30

Quickinfo

- GENERAL**
Magnetic suction installation
IP20
- LED**
BRIDGELUX
2*3W, 2*5W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM< 3
- OPTICAL**
Direct illumination
Beam angle 24°/36°
Optical accessories
- ELECTRICAL**
ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM
- PHYSICAL**
Aluminum



Physical photos



Standard configuration


- COLOUR TEMPERATURE**
3000K
3500K
4000K
- CONTROL**
ON/OFF
- Beam angle**
24°/36°
- COLOUR(housing)**
Black
White

Parameters


POWER	VOLTAGE	CCT	LUMINOUS FLUX
2*3W	48V/24V	3000K/3500K/4000K	395 lm(24° 3000K)
2*5W	48V/24V	3000K/3500K/4000K	613 lm(24° 3000K)

LUMINOUS FLUX
BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.


Light Distribution

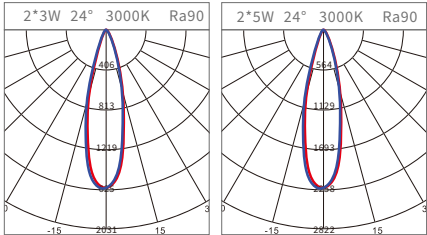

Available Colors



Light effect

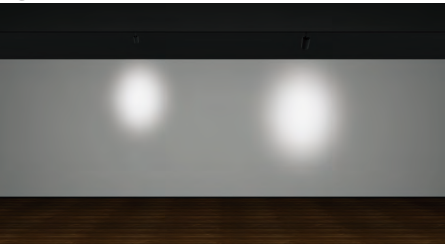

Technical drawing

