

MT15 Series

Spotlight

M15-SP20;M15-SP30;M15-SP40



Standard configuration

COLOUR TEMPERATURE

3000K
3500K
4000K

CONTROL

ON/OFF

Beam angle

24°/36°

COLOUR(housing)

Black
White

Available Colors



White



Golden


Parameters

POWER	VOLTAGE	CCT	LUMINOUS FLUX
3W	48V/24V	3000K/3500K/4000K	200 lm(24° 3000K)
5W	48V/24V	3000K/3500K/4000K	326 lm(24° 3000K)
7W	48V/24V	3000K/3500K/4000K	700 lm(24° 3000K)

LUMINOUS FLUX

BRIDGELUX, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

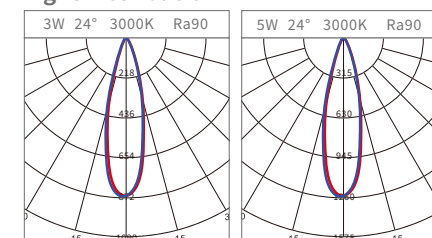

Light effect



Quickinfo

GENERAL

Magnetic suction installation
IP20

LED

BRIDGELUX
3W, 5W
3000K, 3500K, 4000K
50000h@L80
CRI ≥ 90
SDCM < 3

OPTICAL

Direct illumination
Beam angle 24°/36°
Optical accessories

ELECTRICAL

ON/OFF, Tuya Zigbee
0-10V, Phase DIM, DALI DIM

PHYSICAL


Aluminum



RoHS




Physical photos



M15-SP20 3W




M15-SP30 5W




M15-SP40 7W


Technical drawing



M15-SP20 3W



M15-SP30 5W



M15-SP40 7W