



Multiple styles of blackout cups are available for selection, meeting the creative ideas of interior designers and creating a space atmosphere.

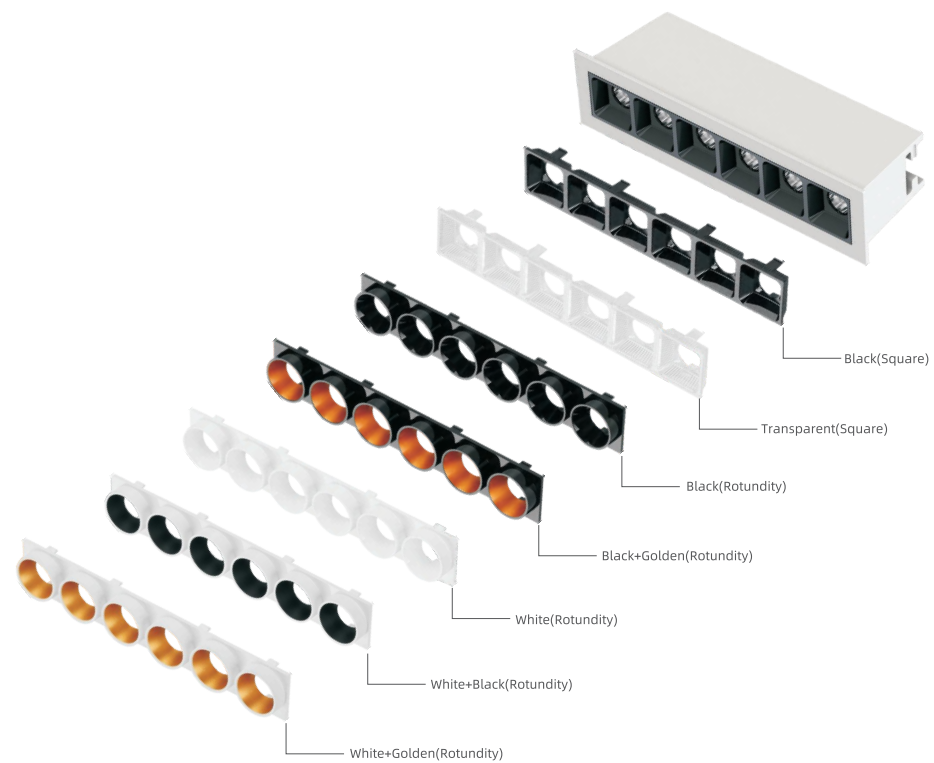

Win

LED recessed downlight

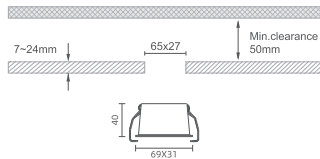

Colour(Front ring)

● Standard
○ Non-standard

WHITE
BLACK

●
●

IP rate

● Standard
○ Non-standard

IP20
IP54

●
○

CCT

● Standard
○ Non-standard

2700K
3000K
3500K
4000K
5000K
2700-6000K

●
●
●
●
●
●

Control

● Standard
○ Non-standard

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

●
●
●
●
○
○
○


WIN 507303

LED 2.5W/7.5W (BRIDGELUX LED)


LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
7.5W	9W	638lm	565lm	15°	3000K	> 90	9V 700mA
7.5W	9W	638lm	559lm	24°	3000K	> 90	9V 700mA
7.5W	9W	638lm	489lm	36°	3000K	> 90	9V 700mA

Light Distribution


9W/15°/3000K/Ra90



9W/24°/3000K/Ra90



9W/36°/3000K/Ra90



Colour(Reflector)

● Standard
○ Non-standard

Square:



Black

Transparent

Rotundity:



Black



Black+Golden



White




White+Black



White+Golden

LED recessed downlight

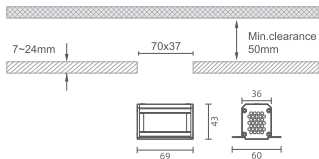

Colour(Front ring)

● Standard
○ Non-standard

WHITE
BLACK

●
●

IP rate

● Standard
○ Non-standard

IP20
IP54

●
○

CCT

● Standard
○ Non-standard

2700K
3000K
3500K
4000K
5000K
2700-6000K

●
●
●
●
●
●

Control

● Standard
○ Non-standard

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

●
●
●
●
○
○
○


WIN 507304

LED 2.5W/7.5W (BRIDGELUX LED)


LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
7.5W	9W	638lm	565lm	15°	3000K	> 90	9V 700mA
7.5W	9W	638lm	559lm	24°	3000K	> 90	9V 700mA
7.5W	9W	638lm	489lm	36°	3000K	> 90	9V 700mA

Light Distribution


9W/15°/3000K/Ra90



9W/24°/3000K/Ra90



9W/36°/3000K/Ra90



Colour(Reflector)

● Standard
○ Non-standard

Square:



Black

Transparent

Rotundity:



Black



Black+Golden



White




White+Black



White+Golden

LED recessed downlight

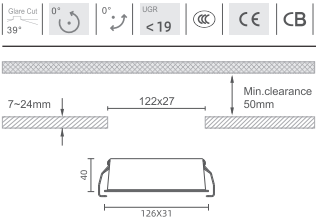

Colour(Front ring)
WHITE
BLACK


IP rate
IP20
IP54

CCT
2700K
3000K
3500K
4000K
5000K
2700-6000K

Control
ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

WIN 507306

LED 8W/10W (BRIDGELUX LED)							
LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
10W	12W	1029lm	753lm	15°	3000K	> 90	18V 700mA
10W	12W	1029lm	745lm	24°	3000K	> 90	18V 700mA
10W	12W	1029lm	652lm	36°	3000K	> 90	18V 700mA

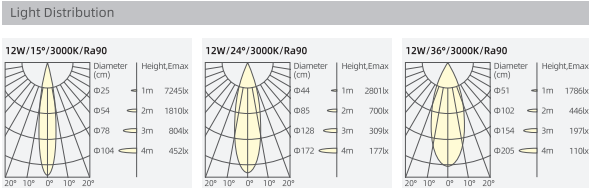


Colour(Reflector)
Standard
Non-standard

Square: Black Transparent

Rotundity: Black Black+Golden White White+Black White+Golden

LED recessed downlight

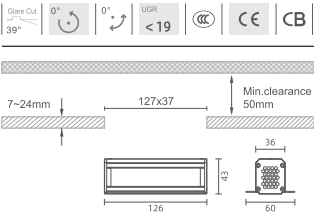

Colour(Front ring)
WHITE
BLACK


IP rate
IP20
IP54

CCT
2700K
3000K
3500K
4000K
5000K
2700-6000K

Control
ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

WIN 507406

LED 8W/10W (BRIDGELUX LED)							
LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
10W	12W	1029lm	753lm	15°	3000K	> 90	18V 700mA
10W	12W	1029lm	745lm	24°	3000K	> 90	18V 700mA
10W	12W	1029lm	652lm	36°	3000K	> 90	18V 700mA


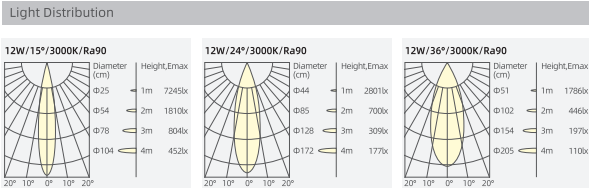


Colour(Reflector)
Standard
Non-standard

Square: Black Transparent

Rotundity: Black Black+Golden White White+Black White+Golden

LED recessed downlight

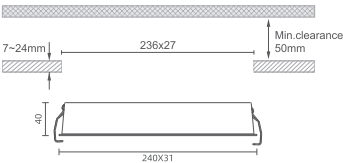

WIN 507312

LED 13W/17W (BRIDGELUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
17W	20W	1764lm	1226lm	15°	3000K	> 90	36V 700mA
17W	20W	1764lm	1053lm	24°	3000K	> 90	36V 700mA
17W	20W	1764lm	1086lm	36°	3000K	> 90	36V 700mA


Colour(Front ring)
● Standard
○ Non-standard
WHITE
BLACK

IP rate
● Standard
○ Non-standard
IP20
IP54

CCT
● Standard
○ Non-standard
2700K
3000K
3500K
4000K
5000K
2700-6000K

Control
● Standard
○ Non-standard
ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

Light Distribution

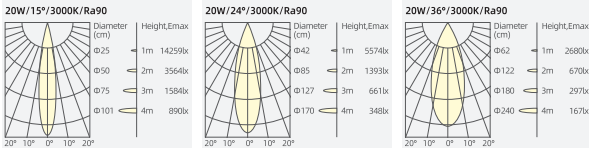


Colour(Reflector)

● Standard
○ Non-standard



LED recessed downlight

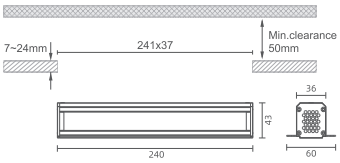

WIN 507412

LED 13W/17W (BRIDGELUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
17W	20W	1764lm	1226lm	15°	3000K	> 90	36V 700mA
17W	20W	1764lm	1053lm	24°	3000K	> 90	36V 700mA
17W	20W	1764lm	1086lm	36°	3000K	> 90	36V 700mA


Colour(Front ring)
● Standard
○ Non-standard
WHITE
BLACK

IP rate
● Standard
○ Non-standard
IP20
IP54

CCT
● Standard
○ Non-standard
2700K
3000K
3500K
4000K
5000K
2700-6000K

Control
● Standard
○ Non-standard
ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

Light Distribution

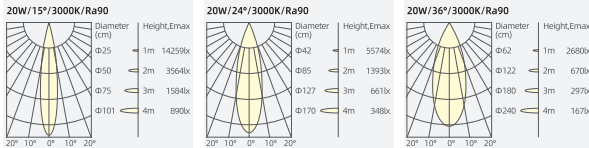

Colour(Reflector)

● Standard
○ Non-standard



LED recessed downlight



LED recessed downlight




Colour(Front ring)
● Standard
○ Non-standard
WHITE
BLACK

IP rate
● Standard
○ Non-standard
IP20
IP54

CCT
● Standard
○ Non-standard
2700K
3000K
3500K
4000K
5000K
2700-6000K

Control
● Standard
○ Non-standard
ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

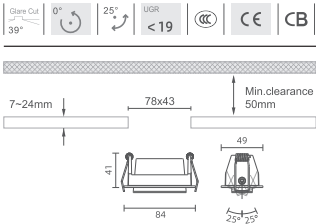


WIN 507202

LED 2.5W/7.5W (BRIDGELUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
7.5W	9W	638lm	565lm	15°	3000K	> 90	9V 700mA
7.5W	9W	638lm	559lm	24°	3000K	> 90	9V 700mA
7.5W	9W	638lm	489lm	36°	3000K	> 90	9V 700mA

Light Distribution

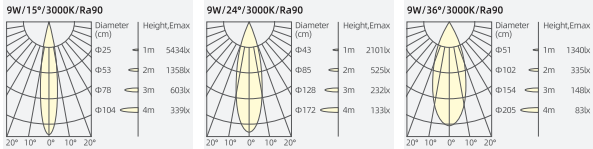


Colour(Reflector)

● Standard
○ Non-standard

Square: Black Transparent

Rotundity: Black Black+Golden White White+Black White+Golden

LED recessed downlight

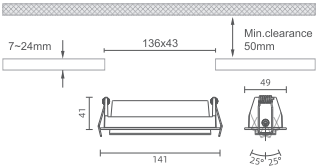

WIN 507206

LED 8W/10W (BRIDGELUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
10W	12W	1029lm	753lm	15°	3000K	> 90	18V 700mA
10W	12W	1029lm	745lm	24°	3000K	> 90	18V 700mA
10W	12W	1029lm	652lm	36°	3000K	> 90	18V 700mA

Colour(Front ring)

WHITE
BLACK

IP rate

IP20
IP54


CCT

2700K
3000K
3500K
4000K
5000K
2700-6000K

Control

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

Light Distribution

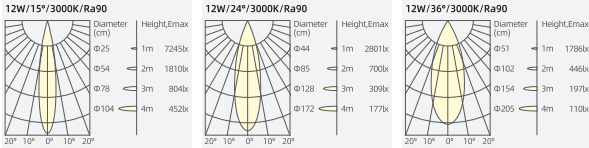


Colour(Reflector)

Standard
Non-standard

Square: Black Transparent

Rotundity: Black Black+Golden White White+Black White+Golden

LED recessed downlight

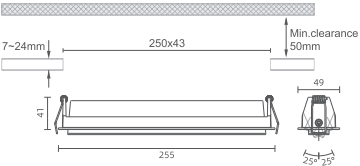

WIN 507212

LED 13W/17W (BRIDGELUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
17W	20W	1764lm	1226lm	15°	3000K	> 90	36V 700mA
17W	20W	1764lm	1053lm	24°	3000K	> 90	36V 700mA
17W	20W	1764lm	1086lm	36°	3000K	> 90	36V 700mA

Colour(Front ring)

WHITE
BLACK

IP rate

IP20
IP54


CCT

2700K
3000K
3500K
4000K
5000K
2700-6000K

Control

ON/OFF
DALI
0/1-10V
TRIAC
BLUETOOTH
ZIGBEE
CASAMBI

Light Distribution

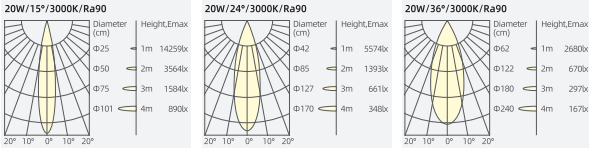

Colour(Reflector)

Standard
Non-standard

Square: Black Transparent

Rotundity: Black Black+Golden White White+Black White+Golden