

Track System Specification

MT11NK-11

— MicroTrack 11 series




◎ **Basic Parameters**

- Material: AL6063, spraying surface
- Coating: Matte Black (RAL9005)
- Size: 12.8*7.8*1000mm / 12.8*7.8*2000mm
- IP grade: IP20
- CCT: 3000K,4000K optional
- CRI: 90
- SDCM: /
- Beam angle: 110°
- Light efficiency: 70 LM/W
- Input voltage: DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming,DALI-2,Tuya Bluetooth,CASAMBI
- Application: Indoor
- Certification: CE,UKCA,ROHS,Reach
- Warranty: 5 years



◎ **Product mechanical data**

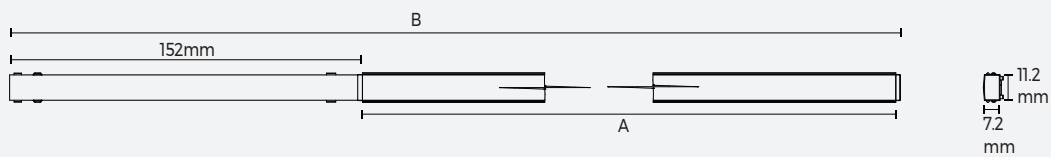


1	A	B
2	1000	1154
3	2000	2154

©Luminaire Parameters

Version	Model	Length	Input Voltage (V)	Type Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	MT11NK-11	1000mm	48VDC	10.0	>90	110°	2700K	630
							3000K	660
							4000K	700
Normal	MT11NK-11	2000mm	48VDC	20.0	>90	110°	2700K	1250
							3000K	1300
							4000K	1400

- Note:
- 1. The output data is based on the testing result of Ra90,4000k luminaires;
 - 2. The tolerance of output data can be vary up to 10%;
 - 3. The output data is typical value.

【Points to note】

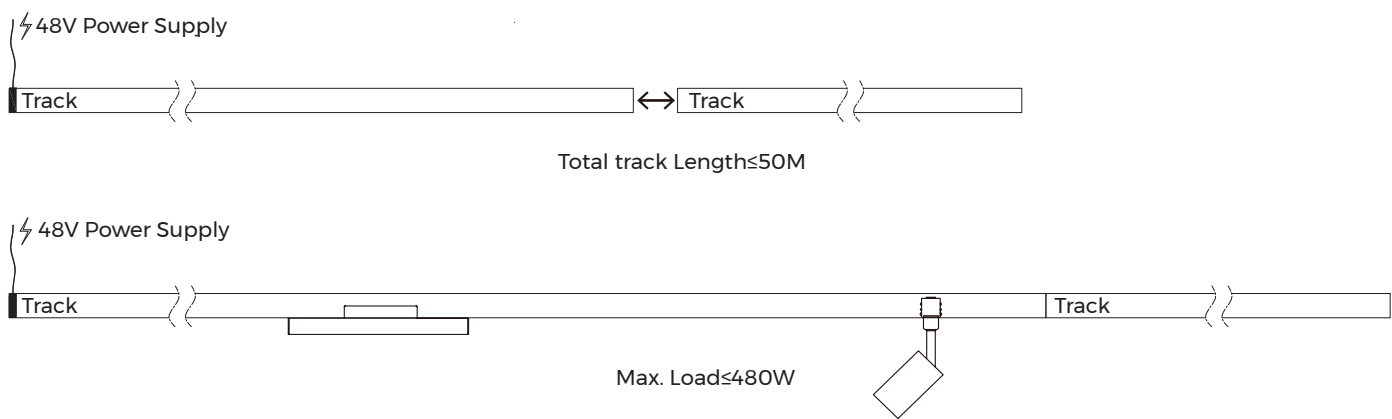

Supplementary power supplies are needed beside the Spotlights module / Decorative module / Linear modular under below one conditions:

- 1. Load>480W on the track
- 2. Total track length >50M