

Compass


suspension lamp




Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Photometric data and technical information	Page 2
5. Recommended use & Installation	Page 3
6. Functionality	Page 3
7. Installation	Page 3
8. Ordering codes	Page 6
9. Certifications & standards	Page 10
10. Maintenance & Cleaning	Page 10


Versions




4074S
Page 6



R21S2
Page 7

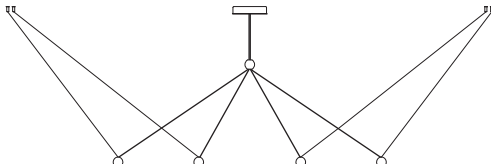

R21S4
Page 8

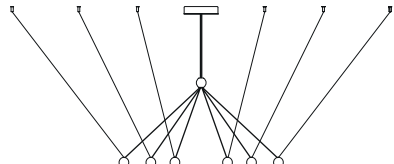

R21S6
Page 9

Compass

suspension lamp


1. Product overview

Suspension lamp designed for ambient or accent lighting, offering a direct and intense beam.

A spherical diffuser hangs from a steel cable, which anchors to the ceiling, allowing precise positioning. The electrical cord runs directly to the canopy, which can be mounted either on the ceiling or on the wall — with the steel cable always fixed to the ceiling.

The lamp's height is adjustable, making it suitable as a pendant light above a table or counter, or as a ceiling or wall-mounted accent piece.

Its off-center power outlet adds flexibility for creative compositions and installations.

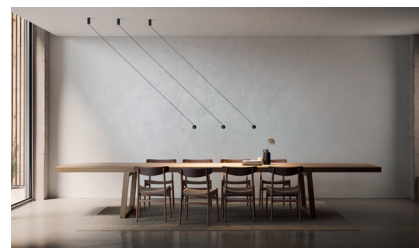

2. Finishes and Materials



26 Black
55 Beige
59 Terracotta

3. Light Source & Dimming

Lamping per head

LED 6,2W (Ang. 38° / >90 CRI / 300mA) 230V

2700K / Typ* 625 lumens

3000K / Typ* 652 lumens

*Integrated LED module (included).

Dimming options:

Standard: TRIAC


Optional: DALI, CASAMBI

4. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.

Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.




Compass

suspension lamp


5. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks. We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, refer to the photometric report.

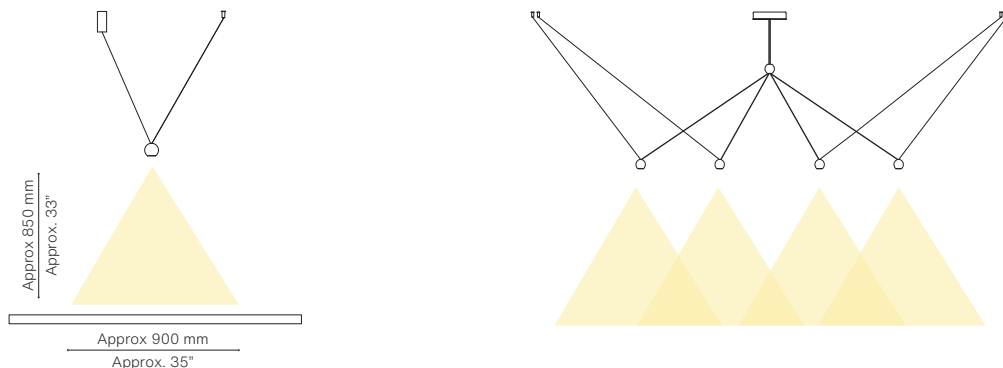

6. Functionality


The shape of the lamp can be changed by raising and lowering the central counterweight.

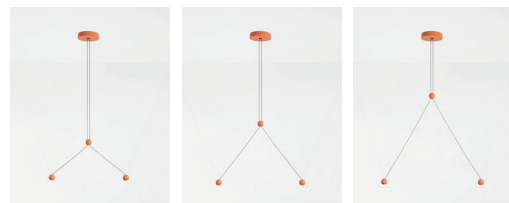

7. Installation

To keep the spherical head aligned vertically downward, each suspension cable must form a minimum angle of 15° from the vertical to ensure the head remains straight. The angle difference between the two cables (relative to the vertical) must not exceed 10° .

Single version: surface canopy can also be mounted on the wall.

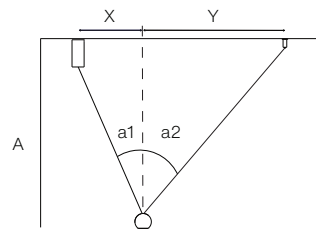

a1 is minimum 15°
a2 is minimum 15°
Difference between a2 and a1 is max. 10°

Compass



suspension lamp

Multiple versions:

Surface canopy





Recessed canopy with remote driver



The placement of the cable supports for each light head depends on the desired lamp configuration, the size of the illuminated surface, and the ceiling height.

Standard Versions:

R21S2

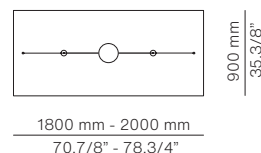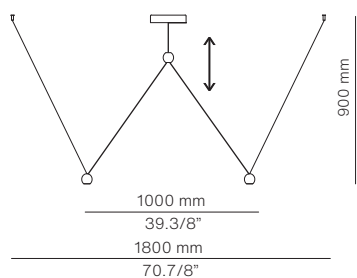



Scheme parameters (table dimensions):

Ceiling height = 2500 mm

Table length = 1800 - 2000 mm

Table width = 900 mm

R21S4

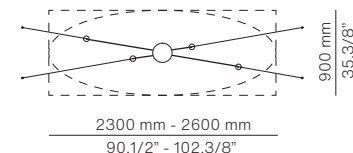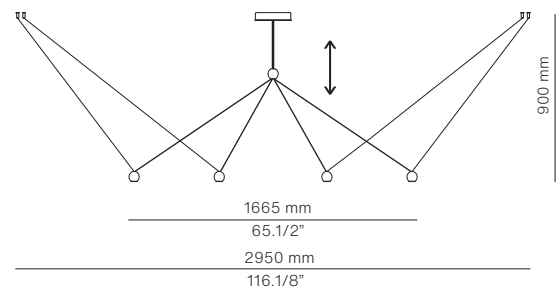



Scheme parameters (table dimensions):

Ceiling height = 2500 mm

Table length = 1800 - 2000 mm

Table width = 900 mm

R21S6

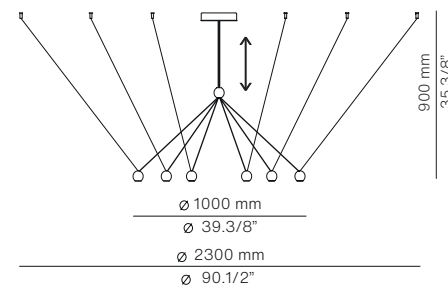

Scheme parameters (table dimensions):

Ceiling height = 2500 mm

Table length = 1800 - 2000 mm


Table width = 900 mm

Compass


suspension lamp

Other possible shapes, measures and compositions: Possibility of creating different shapes and compositions.


R21S2:

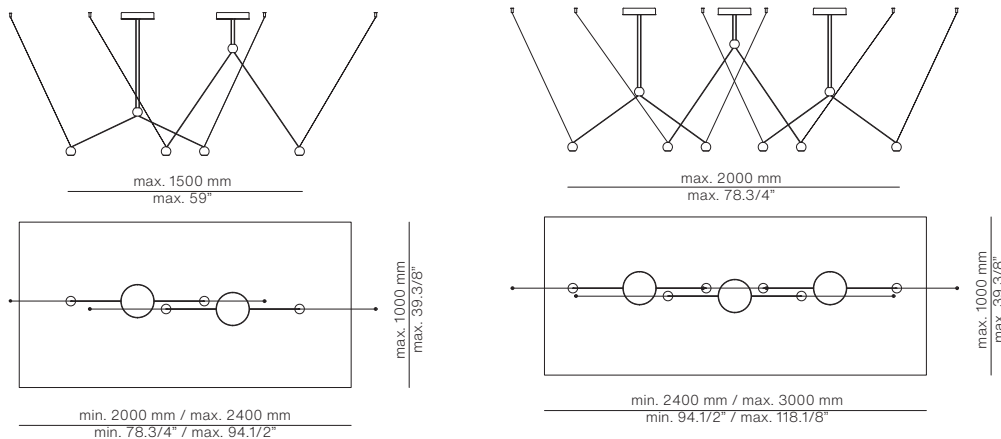

R21S4:

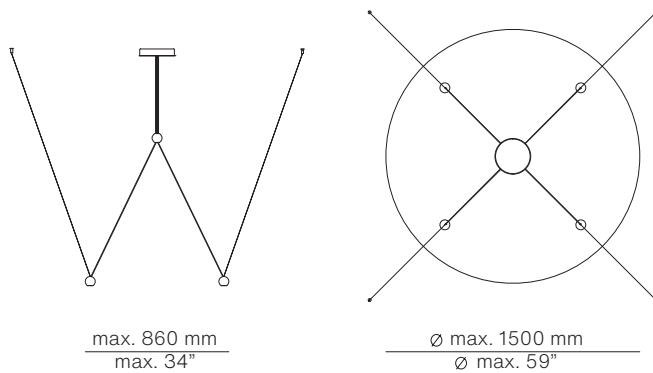

R21S6:

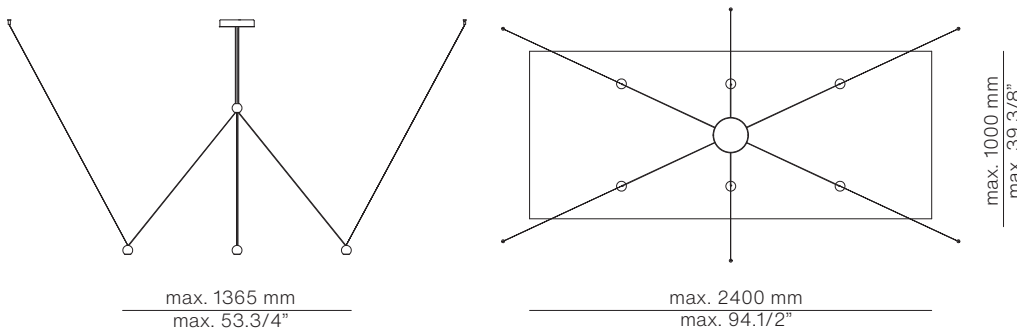

Compass

suspension lamp

8. Ordering Codes

Lamping 4074S

LED 6,2W (Ang. 38° / >90 CRI / 300mA) 230V

2700K / Typ* 625 lumens

3000K / Typ* 652 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional: DALI, CASAMBI)

Finishes

26 Black


55 Beige

59 Terracotta



Drawing

COM_4074S

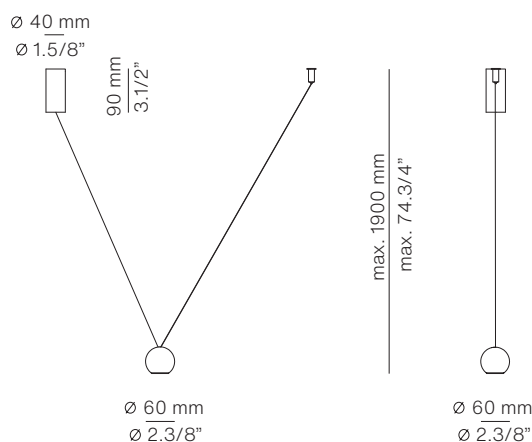

Mounting	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
Surface mounted.	Black	Black	COM_4074S_2626W	COM_4074S_2626M
	Beige	Beige	COM_4074S_5555W	COM_4074S_5555M
	Terracotta	Terracotta	COM_4074S_5959W	COM_4074S_5959M

Compass

suspension lamp

8. Ordering Codes

Lamping R21S2

LED 2x6,2W (Ang. 38° / >90 CRI / 300mA) 230V
2700K / Typ* 2x625 lumens
3000K / Typ* 2x652 lumens
*Integrated LED module (included).

DIM: TRIAC (Optional: DALI, CASAMBI)


Finishes

26 Black
55 Beige
59 Terracotta



Drawing

COM_R21S2

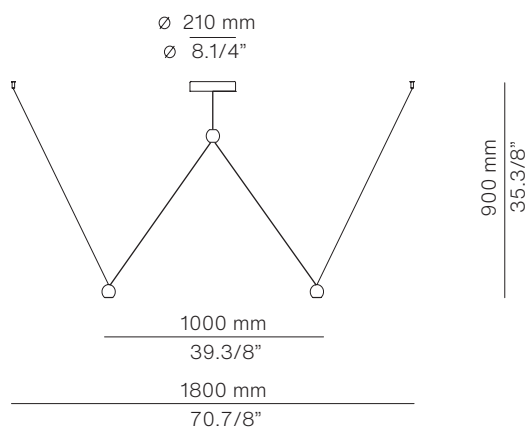

Mounting	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
Surface mounted. Driver in the canopy.	Black	Black	COM_R21S2_2626W	COM_R21S2_2626M
	Beige	Beige	COM_R21S2_5555W	COM_R21S2_5555M
	Terracotta	Terracotta	COM_R21S2_5959W	COM_R21S2_5959M
Recessed, Remote driver Ø 50 mm drill.	Black	Black	COM_R21R2_2626W	COM_R21R2_2626M
	Beige	Beige	COM_R21R2_5555W	COM_R21R2_5555M
	Terracotta	Terracotta	COM_R21R2_5959W	COM_R21R2_5959M

Compass

suspension lamp

8. Ordering Codes

Lamping R21S4

LED 4x6,2W (Ang. 38° / >90 CRI / 300mA) 230V
 2700K / Typ* 4x625 lumens
 3000K / Typ* 4x652 lumens
 *Integrated LED module (included).

DIM: TRIAC (Optional: DALI, CASAMBI)


Finishes

26 Black
 55 Beige
 59 Terracotta



Drawing

COM_R21S4

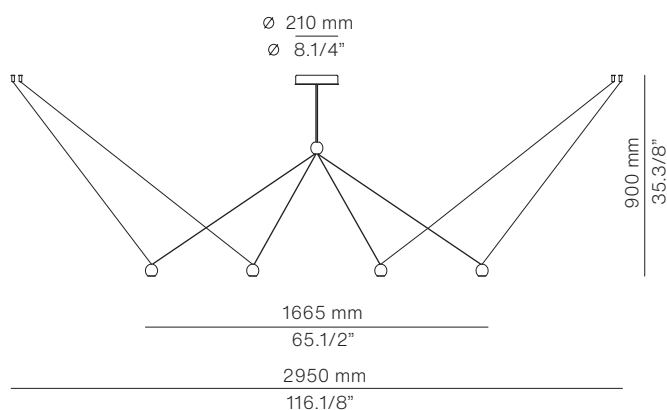

Mounting	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
Surface mounted. Driver in the canopy.	Black	Black	COM_R21S4_2626W	COM_R21S4_2626M
	Beige	Beige	COM_R21S4_5555W	COM_R21S4_5555M
	Terracotta	Terracotta	COM_R21S4_5959W	COM_R21S4_5959M
Recessed, Remote driver Ø 50 mm drill.	Black	Black	COM_R21R4_2626W	COM_R21R4_2626M
	Beige	Beige	COM_R21R4_5555W	COM_R21R4_5555M
	Terracotta	Terracotta	COM_R21R4_5959W	COM_R21R4_5959M

Compass

suspension lamp

8. Ordering Codes

Lamping R21S6

LED 6x6,2W (Ang. 38° / >90 CRI / 300mA) 230V
 2700K / Typ* 6x625 lumens
 3000K / Typ* 6x652 lumens
 *Integrated LED module (included).


DIM: TRIAC (Optional: DALI, CASAMBI)

Finishes

26 Black
 55 Beige
 59 Terracotta

Drawing

COM_R21S6

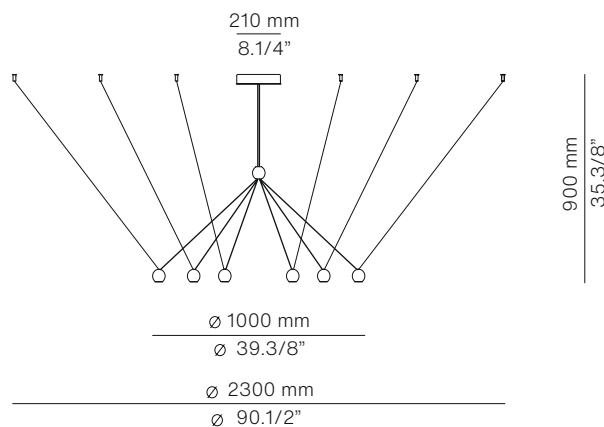

Mounting	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
Surface mounted. Driver in the canopy.	Black	Black	COM_R21S6_2626W	COM_R21S6_2626M
	Beige	Beige	COM_R21S6_5555W	COM_R21S6_5555M
	Terracotta	Terracotta	COM_R21S6_5959W	COM_R21S6_5959M
Recessed, Remote driver Ø 50 mm drill.	Black	Black	COM_R21R6_2626W	COM_R21R6_2626M
	Beige	Beige	COM_R21R6_5555W	COM_R21R6_5555M
	Terracotta	Terracotta	COM_R21R6_5959W	COM_R21R6_5959M

Compass

suspension lamp

9. Certifications & Standards

2700K version   $\frac{IP}{20}$  

3000K version   $\frac{IP}{20}$  

Warranty: 2 years

100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.