


# Track

## Straight Track

Ceiling

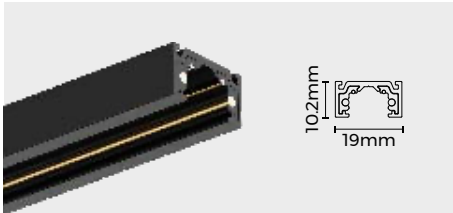


TLS-MT11-SX0 (x: 1/2/3 M)

Installation: Ceiling  
Material: Aluminum  
Coating: Black  
Size: 19×10.2×1000/2000/3000mm

Rated current: 10A  
Maximum load: 480W  
Input voltage: DC24-48V

Pendant track

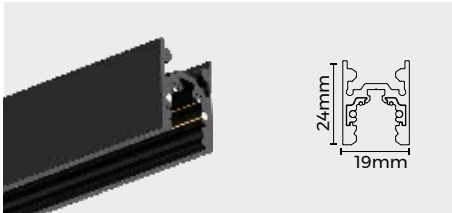

TLS-MT11-HX0 (x: 1/2/3 M)

Installation: Pendant  
Material: Aluminum  
Coating: Black  
Size: 19×24×1000/2000/3000mm

Rated current: 10A  
Maximum load: 480W  
Input voltage: DC24-48V

## Curve Track

Ceiling



TLS-MS111090

Installation: Ceiling  
Material: Aluminum  
Coating: Black  
Size: 19×10.5×φ1000mm, 90°

Rated current: 10A  
Maximum load: 480W  
Input voltage: DC24-48V

Pendant track




TLS-MT11-SRX0 (x: 1/2/3 M)

Installation: Pendant  
Material: Aluminum  
Coating: Black  
Size: Ø25.5×21×1000/2000/3000mm

Rated current: 10A  
Maximum load: 480W  
Input voltage: DC24-48V

Trimless track

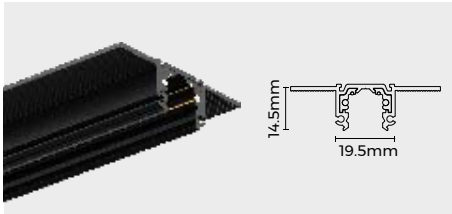

TLS-MT11-RX0 (x: 1/2/3 M)

13mm gypsum board

Installation: Trimless recessed  
Material: Aluminum  
Coating: Black  
Size: 19.5×14.5×1000/2000/3000mm

Rated current: 10A  
Maximum load: 480W  
Input voltage: DC24-48V

