

ZENA

Roberto Paoli

The clean silhouette of Zena is the result of a rigorous research of geometrical design that leads to the conception of an essential and powerful artefact featuring significant lighting performances. Zena represents a revolution in the world of wall lamps, a contemporary experiment that transforms the wall lamp from a traditionally static object into a dynamic and sophisticated element, an important synthesis of lightness, power and comfort. Zena features a recyclable aluminium extrusion.



ZENA 30 - IP20 | 2700K

LAMPING

Source	LED board
Total power	30W
Emission	indirect
Switching	dimmable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Notes	white RAL 9003, black RAL 9005
Net lamp weight	1 kg

Codes

ZEN LW2 31
ZEN LN2 31
ZEN LM2 31


Structure/Diffuser

white/opal
black/opal
corten/opal

PACKAGE

Package 01 Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

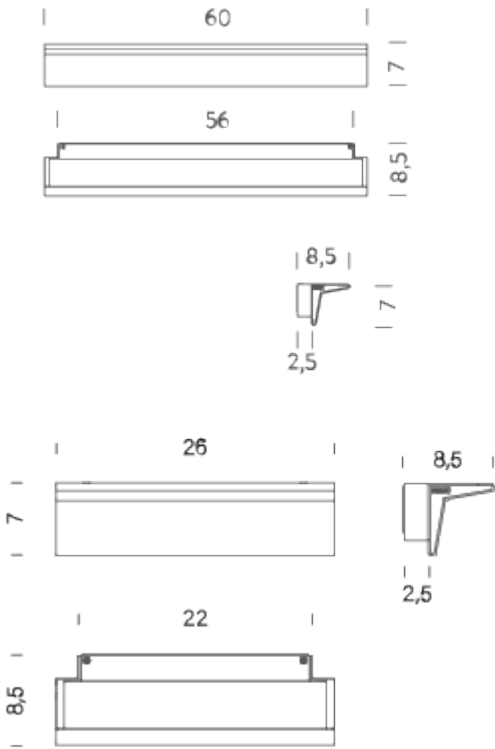

ZENA 30 - IP20 | 3000K

LAMPING

Source	LED board
Total power	30W
Emission	indirect
Switching	dimmable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Notes	white RAL 9003, black RAL 9005
Net lamp weight	1 kg

Codes

ZEN LWW 31
ZEN LNW 31
ZEN LMM 31


Structure/Diffuser

white/opal
black/opal
corten/opal

PACKAGE

Package 01 Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

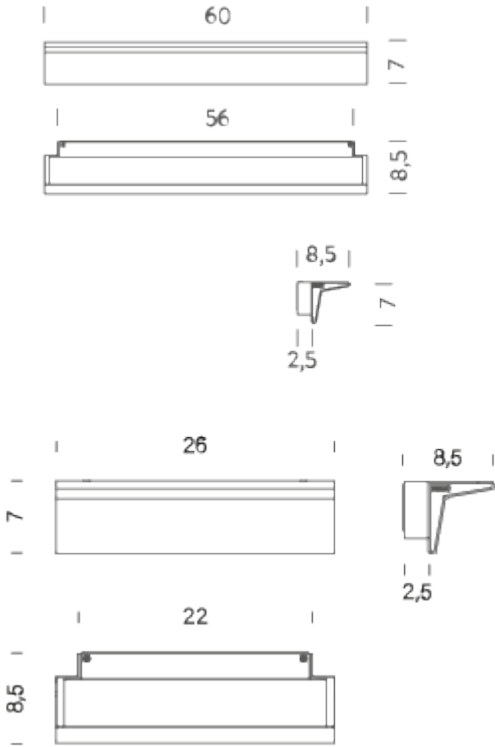

ZENA 30 - IP44 | 2700K

LAMPING

Source	LED board
Total power	30W
Emission	indirect
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	44
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Notes	white RAL 9003, black RAL 9005
Net lamp weight	1 kg

Codes

- ZEN LN2 33
- ZEN LW2 33
- ZEN LM2 33


Structure/Diffuser

- black/opal
- white/opal
- corten/opal

PACKAGE

Package 01 Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

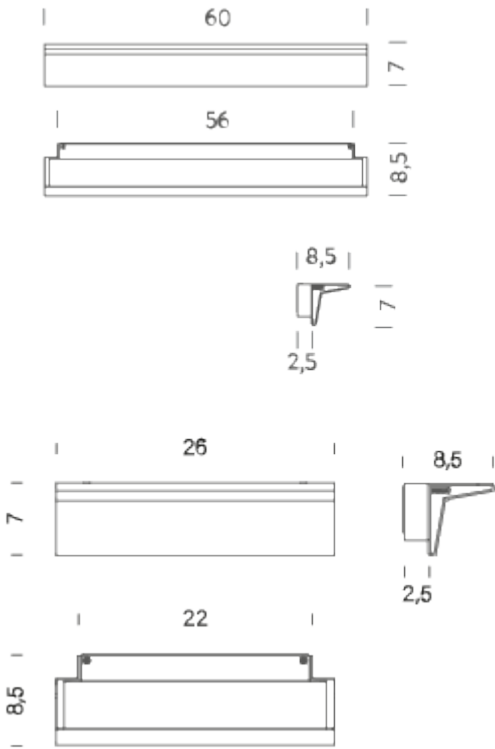

ZENA 30 - IP44 | 3000K

LAMPING

Source	LED board
Total power	30W
Emission	indirect
Switching	dimmable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	IP44
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Notes	white RAL 9003, black RAL 9005
Net lamp weight	1 kg

Codes

- ZEN LNW 33
- ZEN LWW 33
- ZEN LMM 33


Structure/Diffuser

- black/opal
- white/opal
- corten/opal

PACKAGE

Package 01	Dimension: 15x15x35 cm / Gross weight: 1,5 kg
------------	---

Certificazioni

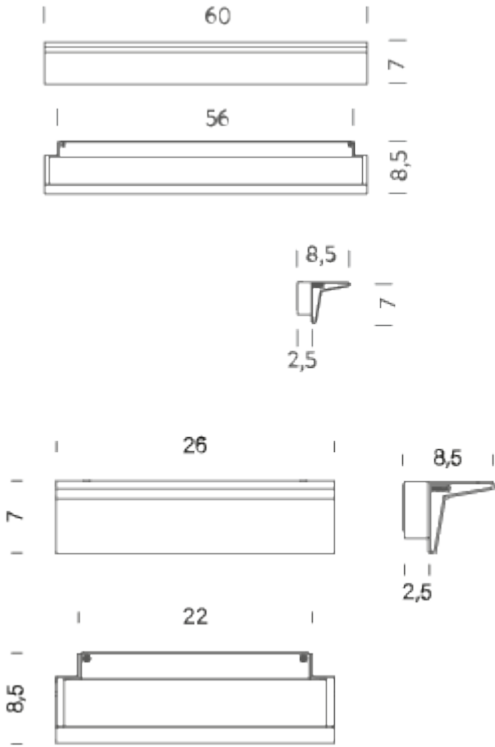

ZENA 60 - IP20 | 2700K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	6000lm
Typ CRI	85
IP class	20
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

- ZEN LW2 34
- ZEN LN2 34
- ZEN LM2 34

Structure/Diffuser

- white /opal
- black /opal
- corten/opal

Certificazioni

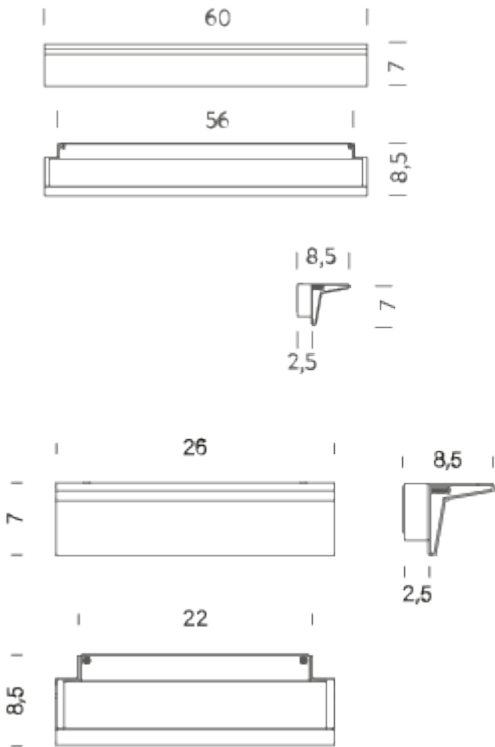

ZENA 60 - IP20 | 3000K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	6000lm
Typ CRI	85
IP class	20
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

- ZEN LWW 34
- ZEN LNW 34
- ZEN LMM 34

Structure/Diffuser

- white/opal
- black/opal
- corten/opal

Certificazioni

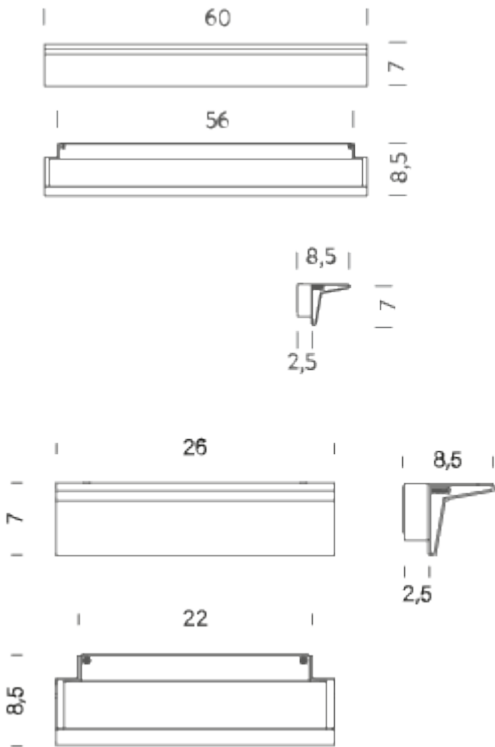

ZENA 60 - IP44 | 2700K

LAMPING

Source	LED board
Total power	28W
Switching	dimmable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	6000lm
Typ CRI	85
IP class	44
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

- ZEN LW2 35
- ZEN LN2 35
- ZEN LM2 35

Structure/Diffuser

- white /opal
- black/opal
- corten/opal

Certificazioni

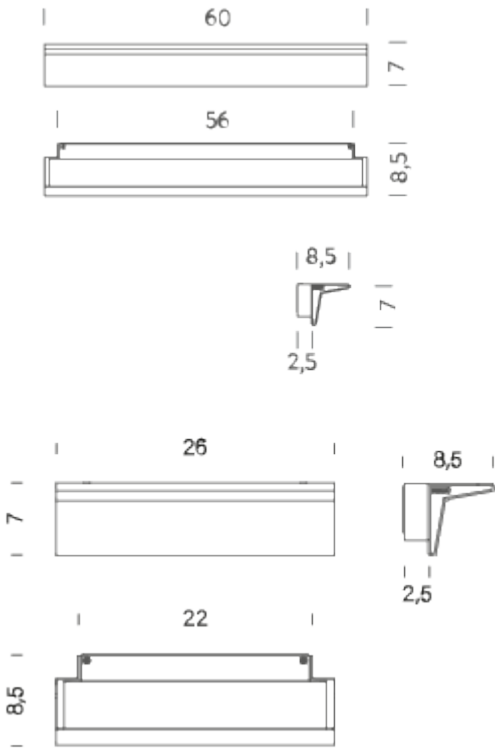

ZENA 60 - IP44 | 3000K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	6000lm
Typ CRI	85
IP class	44
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005

Codes

ZEN LWW 35
ZEN LNW 35
ZEN LMM 35

Structure/Diffuser

white/opal
black /opal
corten/opal

Certificazioni

