



152mm

ECLIPSE

LT-YS

Super comfort, no glare at all
 180° and 360° symmetrical light distribution
 Die-cast aluminum fixture with polyester powder coating on the surface
 IK08 IP65 protection level
 Multiple installation options



1000mm

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-24W	1008.0	42.0	Symmetry (360°)

3000/4000K CCT available on request

Finish color options :

Textured Grey
RAL 9006


Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors



Technical features

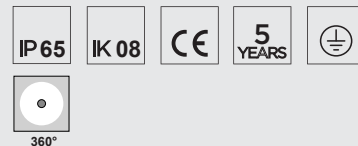

Technical data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

Option

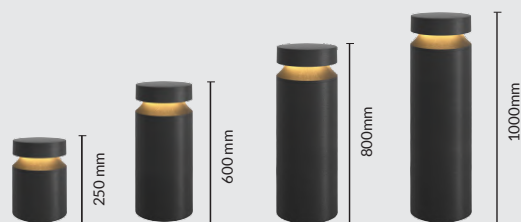

Concrete anchor 1023
 Material: steel
 *Need to be purchased separately

