



Technical features




Technical data

Wattage	10W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body + Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching : MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included



ECLIPSE

LT-YS

Super comfort, no glare at all
 180° and 360° symmetrical light distribution
 Die-cast aluminum fixture with polyester powder coating on the surface
 IK08 IP65 protection level
 Multiple installation options

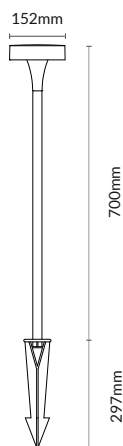


Option

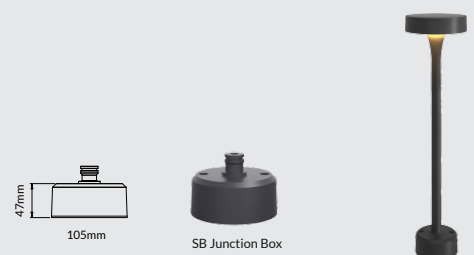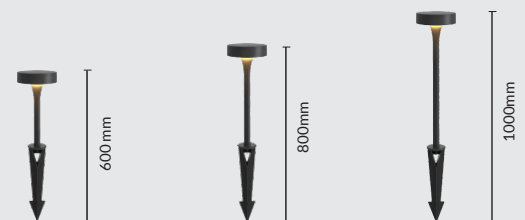

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-10W	700.0	70.0	Symmetry 360°

3000/4000K CCT available on request

Finish color options :



Customizable in different finishing colors

