



Technical features




Technical data

Wattage	7W
IP Rating	IP65
IK Rating	IK06
Material	Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1*COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.6 mt. neoprene power cable included

TUBE

LT-X1


TUBE bollard is made of 6063-T6 extruded aluminum alloy. LED fixtures are precision machined by CNC machining. The acrylic optics provide a wide range of IES type distribution. The driver is mounted inside the fixture which is accessible from the back of the fixture head for ease of maintenance.

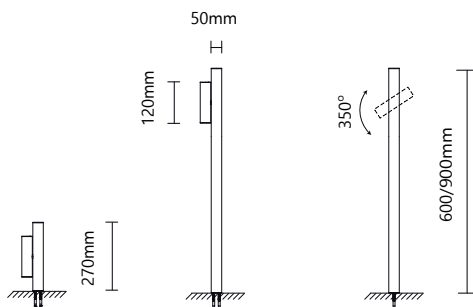

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-X1-7W	578.0	85.0	15° 24° 36° 50°

3000/4000K CCT available on request

Finish color options :



Customizable in different finishing colors

Install attachment option



Concrete anchor
Mounting plate with threaded bar and
fixing nuts M8
*Need to be purchased separately

