

Rose Series Projector







ROSE Mini

LT-SL 1.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

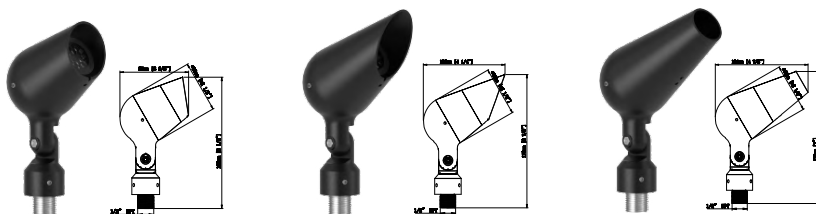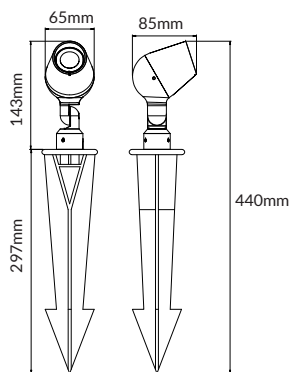

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40°-70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features



Technical data


Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching : MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging size	41*21*41cm(20Pcs) 8.6kg

Option

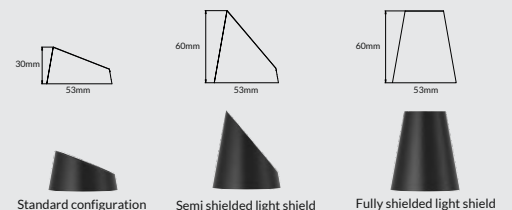

* Different types of light shields can be replaced on site

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture






ROSE

LT-SL 2.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

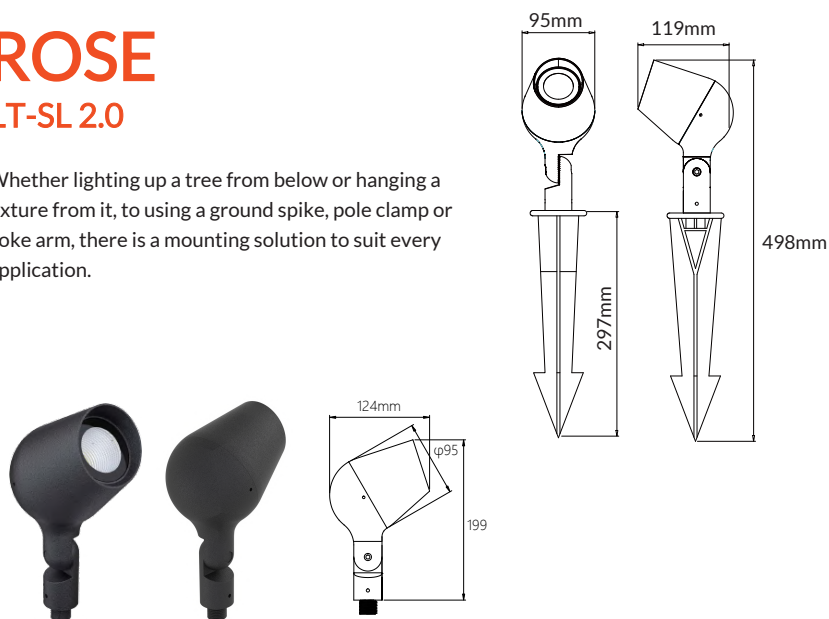

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40°-70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features




Technical data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.1 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTICAL ACCESSORIES




Honeycomb louvre built into the lighting fixture

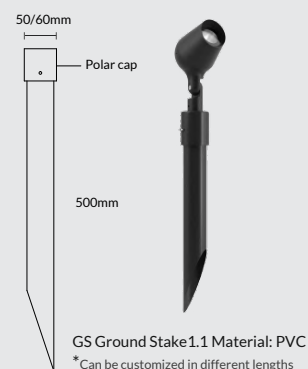



ROSE LT-SL 2.0+


Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

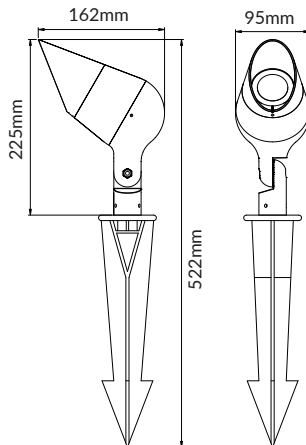

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :



Customizable in different finishing colors


Technical features




Technical data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching : MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.1 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTICAL ACCESSORIES

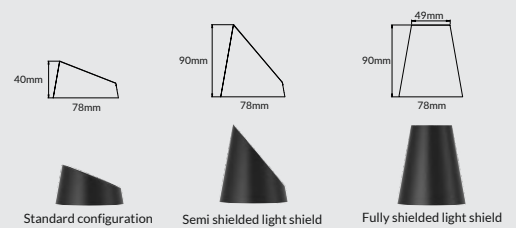

* Different types of light shields can be replaced on site



Honeycomb louvre built into the lighting fixture






ROSE Pro

LT-SL 3.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

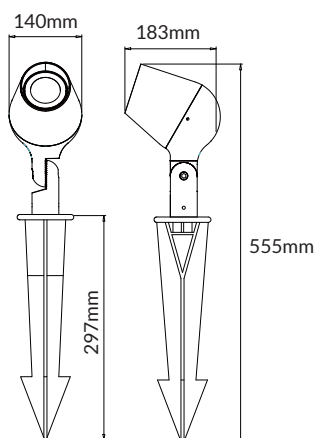

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features




Technical data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

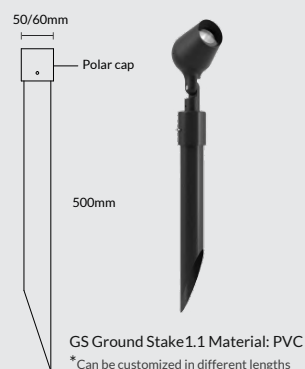

GS Ground Stake 1.1 Material: PVC

*Can be customized in different lengths






ROSE Mini

LT-SL 1.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

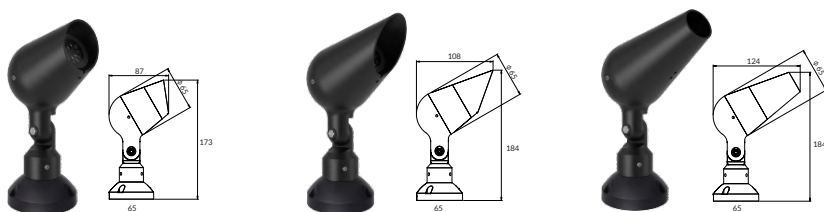

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features





Technical data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging size	41*21*41cm(20Pcs) 8.6kg

Option

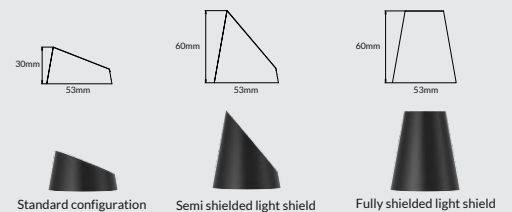

* Different types of light shields can be replaced on site

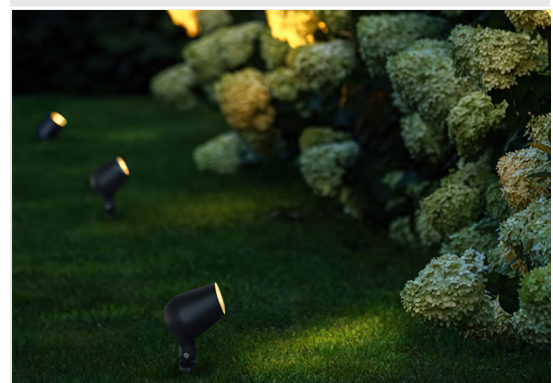
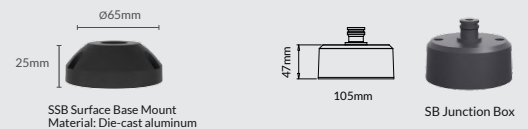




ROSE

LT-SL2.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

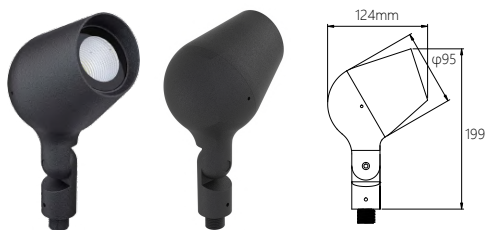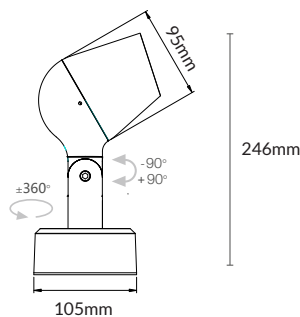

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features



Technical data


Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

OPTION

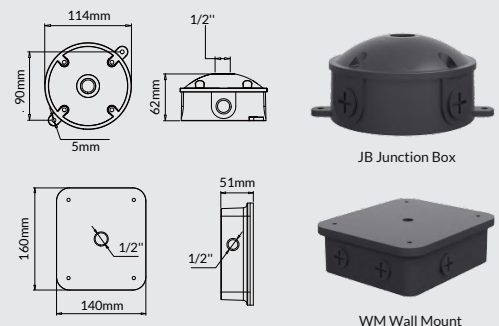

JB Junction Box

WM Wall Mount



NEW

www.lightoria.net



Technical features




Technical data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg


ROSE

LT-SL2.1+


Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

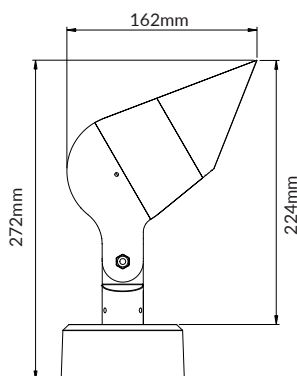

OPTION

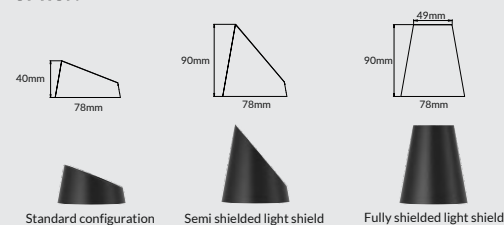


* Different types of light shields can be replaced on site

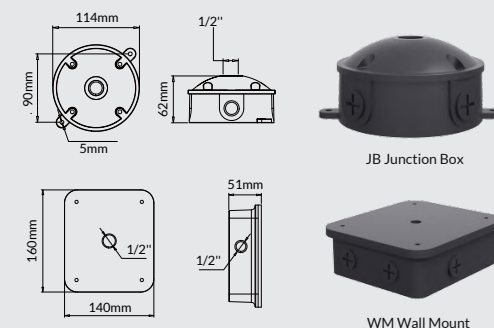

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
			36°
20W COB	1920.0		60°
			40°-70°

2700/4000/5000K CCT available on request

Finish color options :




Customizable in different finishing colors



ROSE Pro

LT-SL3.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

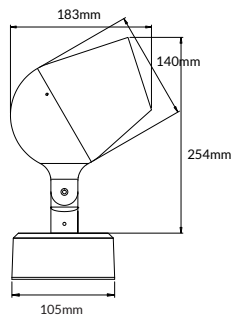

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
			36°
60W COB	6000.0		60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors


Technical features



Technical data


Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
POWER CABLES	Neoprene cable 3x0.75
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

OPTION

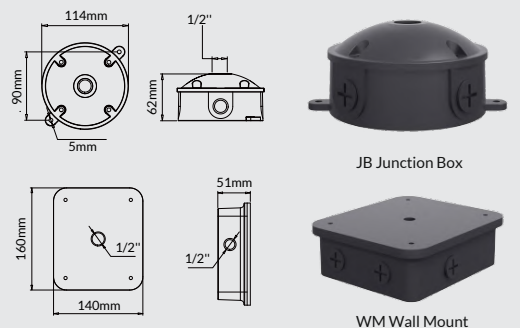




ROSE RGBW


LT-SL 2.0-RGBW

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

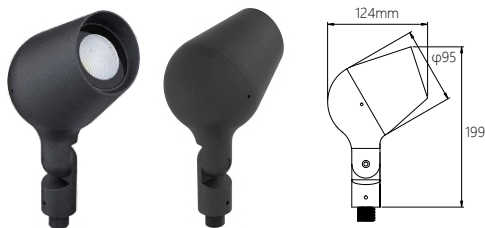

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W COB	396.0	33.00	<div> 15° </div> <div> 24° </div> <div> 36° </div> <div> 60° </div> <div> 40°*70° </div>

Finish color options :



Customizable in different finishing colors


Technical features



Technical data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply DC 24V
Wireless transmission distance	: 30m
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION

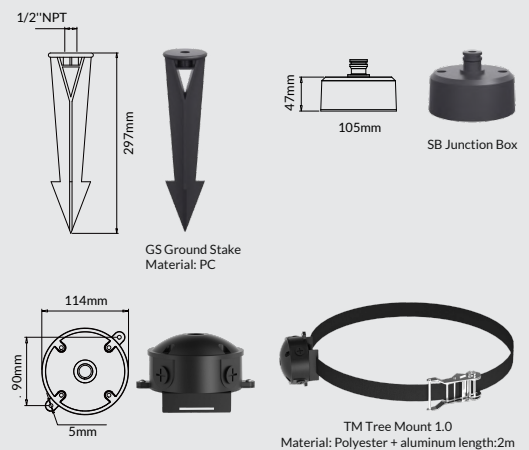



Technical features

IP66

IK 06

CE

CB

5
YEARS

III

DMX512



Technical data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	3x3535LED CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply DC 24V
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

ROSE RGBW

LT-SL2.0-RGBW-512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

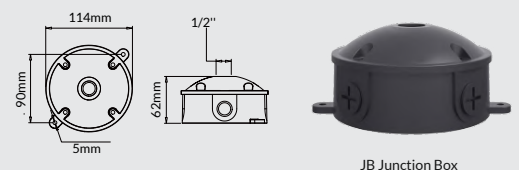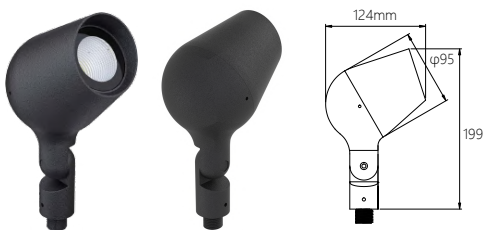

JB Junction Box

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W	396.0	33.00	<div>15°</div> <div>24°</div> <div>36°</div> <div>60°</div> <div>40°70°</div>

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors





Technical features

IP66	IK 06	CE	CB	5 YEARS	III
DMX512					


Technical data

Wattage	24/36W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	8x3535LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply DC 24V
Power Cables	Neoprene cable 5x0.75
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.2Kg

ROSE Pro RGBW

LT-SL3.0-RGBW-512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

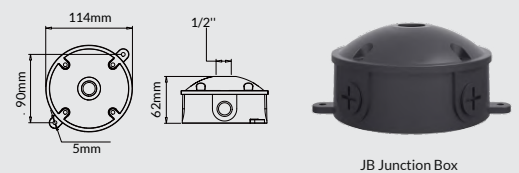

JB Junction Box

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
24W	792.0	33.00	15°
			24°
36W	1188.0		36°
			60°
			40*70°

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (on request)
Bronze RAL8019		

Customizable in different finishing colors






ROSE Mini

LT-SL 1.2


Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

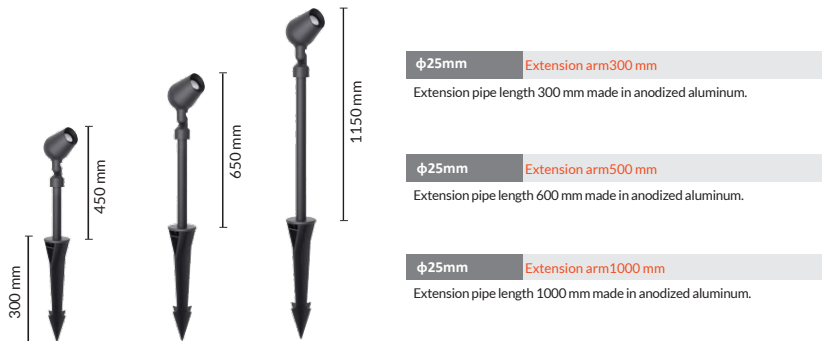

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40°-70°

2700/4000/5000K CCT available on request

Finish color options :



Customizable in different finishing colors


Technical features




Technical data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1x COB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included

Option

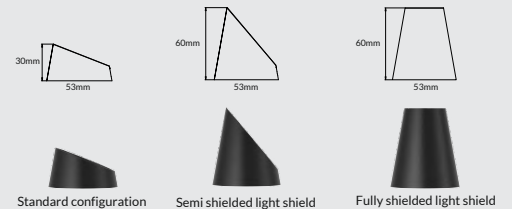

* Different types of light shields can be replaced on site


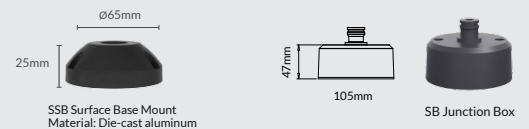




ROSE

LT-SL 2.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

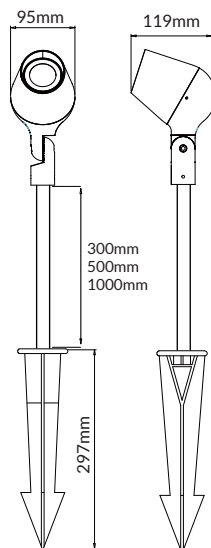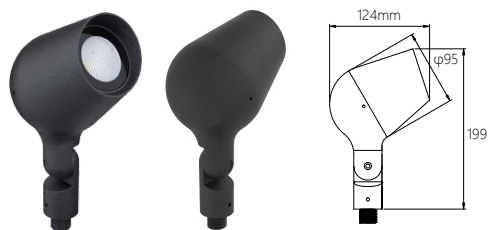

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°-70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors

Technical features



Technical data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg


φ25mm Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.

φ25mm Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.

φ25mm Extension arm 1000 mm
Extension pipe length 900 mm made in anodized aluminum.



OPTION

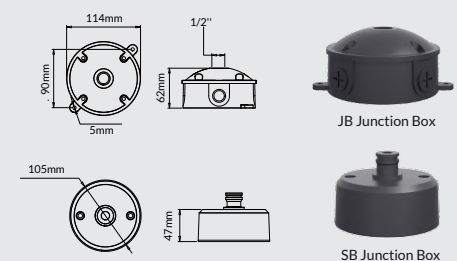




ROSE Pro

LT-SL3.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

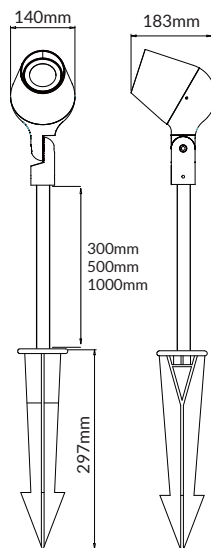

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40°-70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors

Technical features



Technical data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

φ25mm Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.

φ25mm Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.

φ25mm Extension arm 1000 mm
Extension pipe length 1000 mm made in anodized aluminum.



OPTION

