




# LINE ECO

Professional Office Lighting

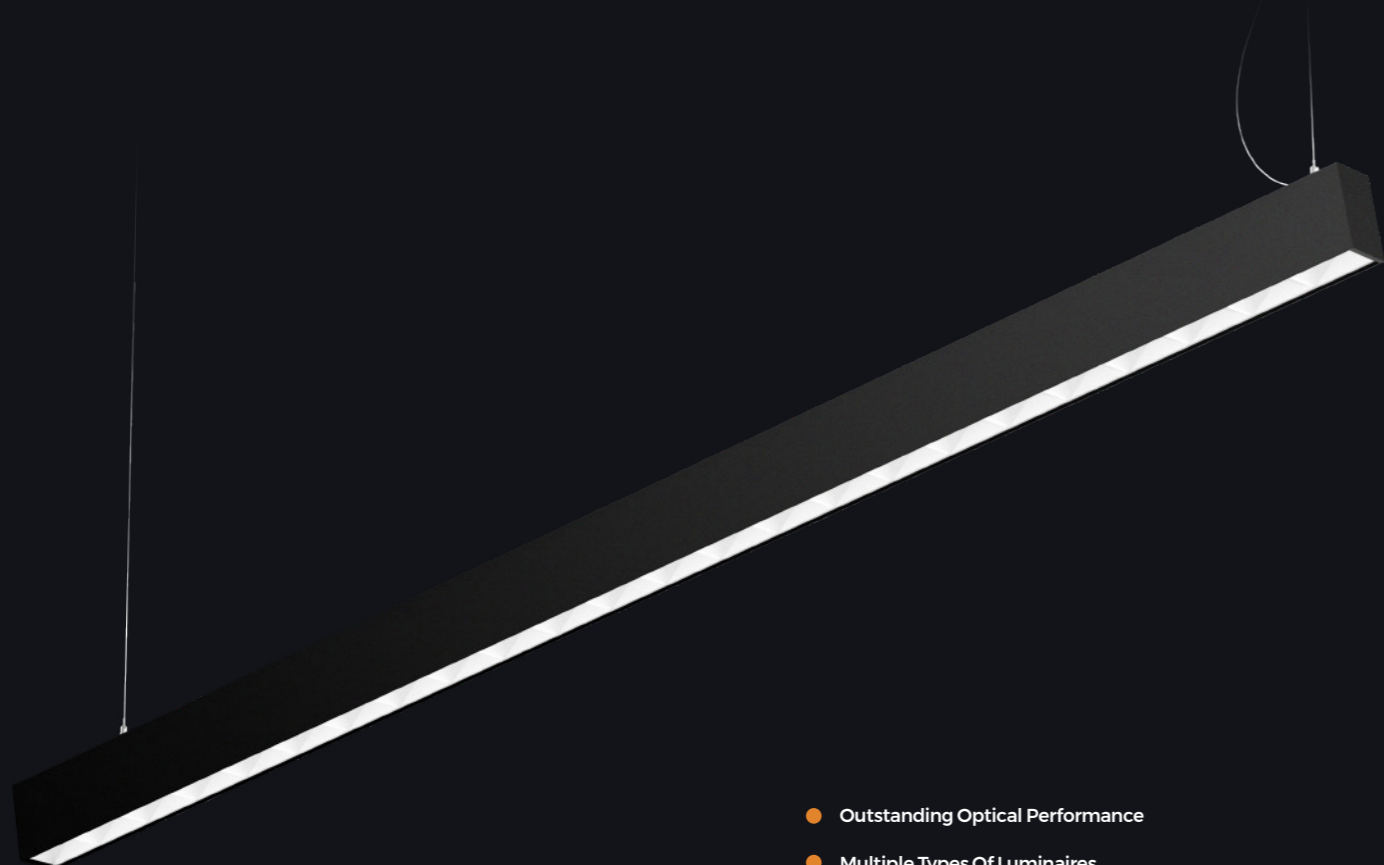

- Outstanding Optical Performance
- Multiple Types Of Luminaires
- Mainstream Size Options
- Rich Professional Optics
- Diverse Color Options
- DIP Switch Color Temperature Adjustment
- DIP Switch For Power Adjustment

# LINE ECO

Professional Office Lighting

## Series Introduction

The LINE ECO series offers a comprehensive range of professional office lighting fixtures. With a high luminous efficacy of up to 150LM/W and UGR <19 as its foundation, it ensures outstanding lighting performance, providing an unparalleled lighting experience for office spaces. Its various sizes and flexible installation options cater to different spatial requirements, allowing for greater freedom of choice. Each model comes equipped with multiple optical options, enabling you to create a diverse range of lighting effects. Whether it's for conference rooms, offices, or relaxation areas, it perfectly matches your needs.

High light eff. Up to 150LM/W

SDCM<3(ANSI)

UGR<19

LM80 ; >54000H

## Outstanding Optical Performance

- **High light efficiency**  
150lm/w With Diffuser  
135lm/w With Prismatic  
130lm/w With Grating
- **UGR<19**  
Prismatic & Grating


**Multiple Types Of Luminaires**

Available in a variety of mounting options, including pendant, surface-mounted and recessed, it can be adapted to the different needs of any type of space and greatly enhanced flexibility. Whether it's a commercial office space, home décor or public space, you'll find the right installation for you.

**Pendant**




**Pendant**  
Up & down light

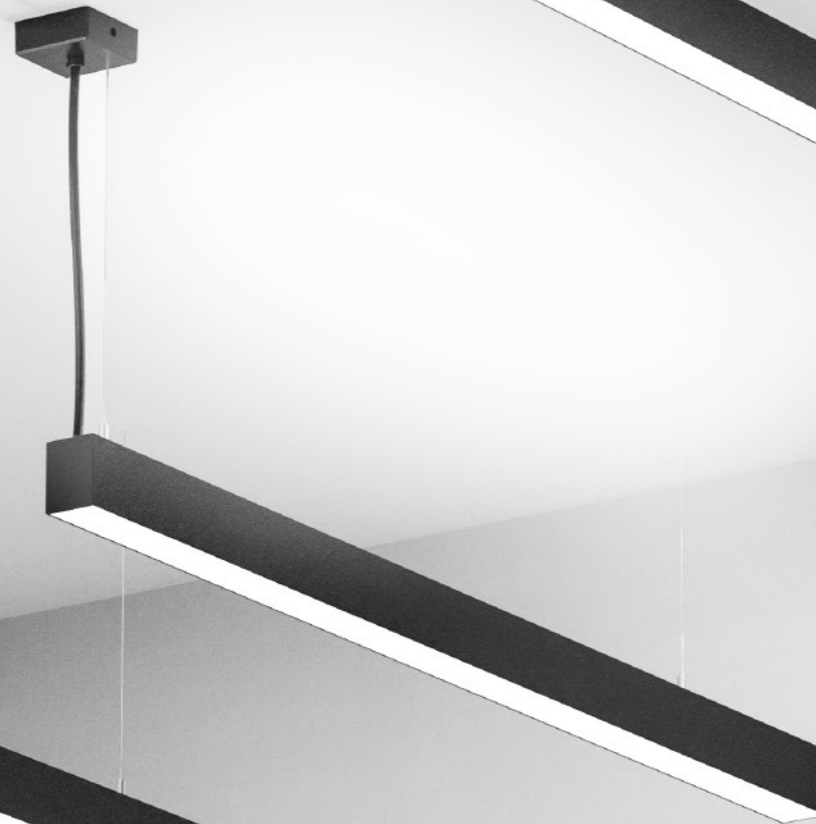

**Surface-mounted**




**Recessed**

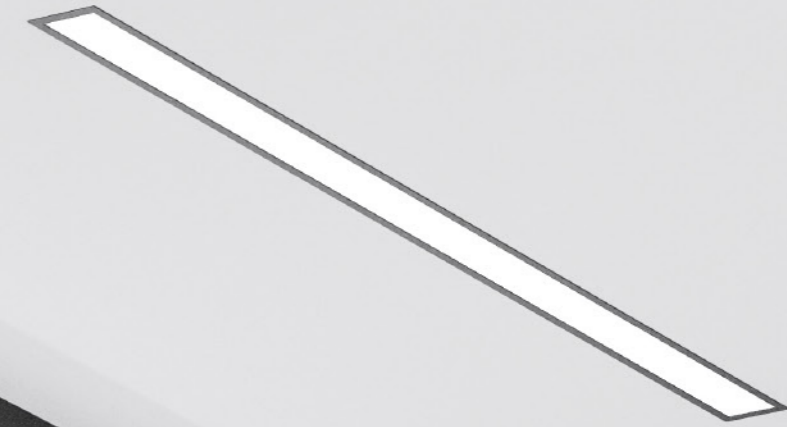

**Mainstream Size Options**

Offering mainstream size options of 35/50/70mm, catering to various spatial dimensions, ensuring both aesthetic appeal and practicality of the luminaires.

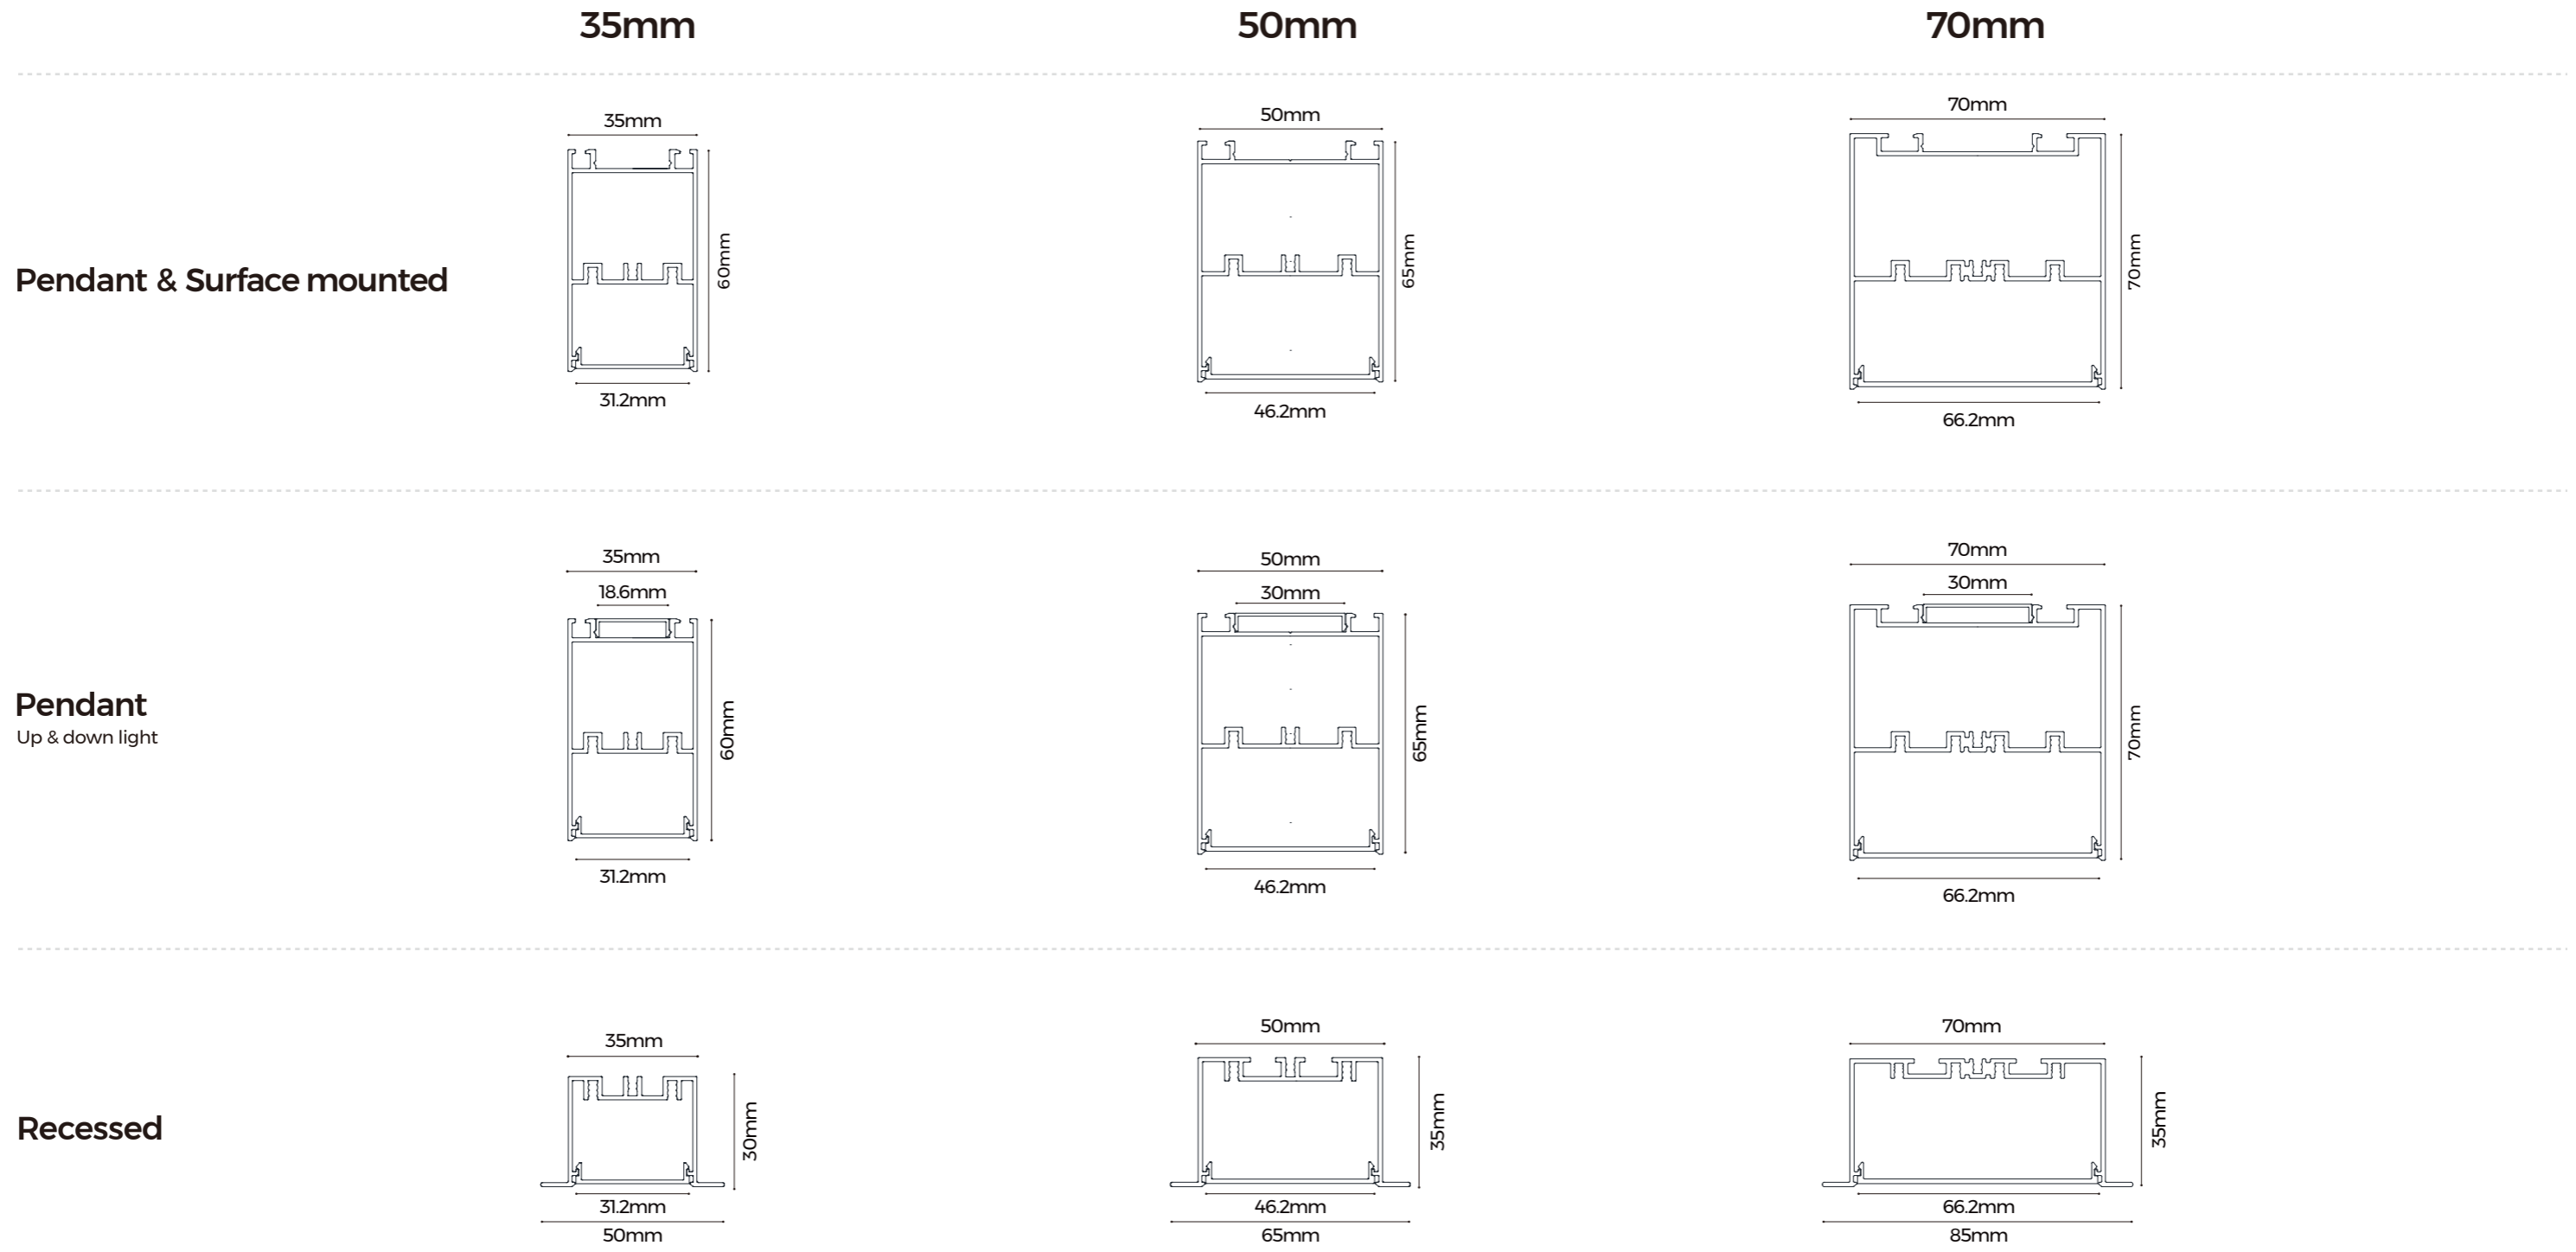

**Rich Professional Optics**

Meet the lighting needs of different scenes and create richer lighting effects.



**Diffuser**

It is made of highly transparent imported PC material to improve light distribution and uniformity. By effectively diffusing light, the contrast between glare and shadows is reduced, creating a bright, soft and comfortable lighting effect. It is suitable for various indoor main lighting scenes.



**Prismatic**

With the help of advanced technology, we print the optical microstructure on the transparent film, so that the luminaire can achieve ultra-high 135LM/W light efficiency, and at the same time meet the UGR<19 standard to achieve precise light control. Suitable for a variety of high-end office environments.



**Grating**

Its unique grille design allows for precise light control and glare reduction. UGR<19 for a wide range of office, commercial and public spaces

# LINE ECO


Professional Office Lighting



## Diverse Color Options


Available in a variety of colours, they can be freely combined according to the décor style and personal preferences to create the ideal lighting atmosphere.

- Matt black
- Matt white
- Silver
- Matt Orange
- Matt blue
- Matt green
- Matt yellow
- Rose gold

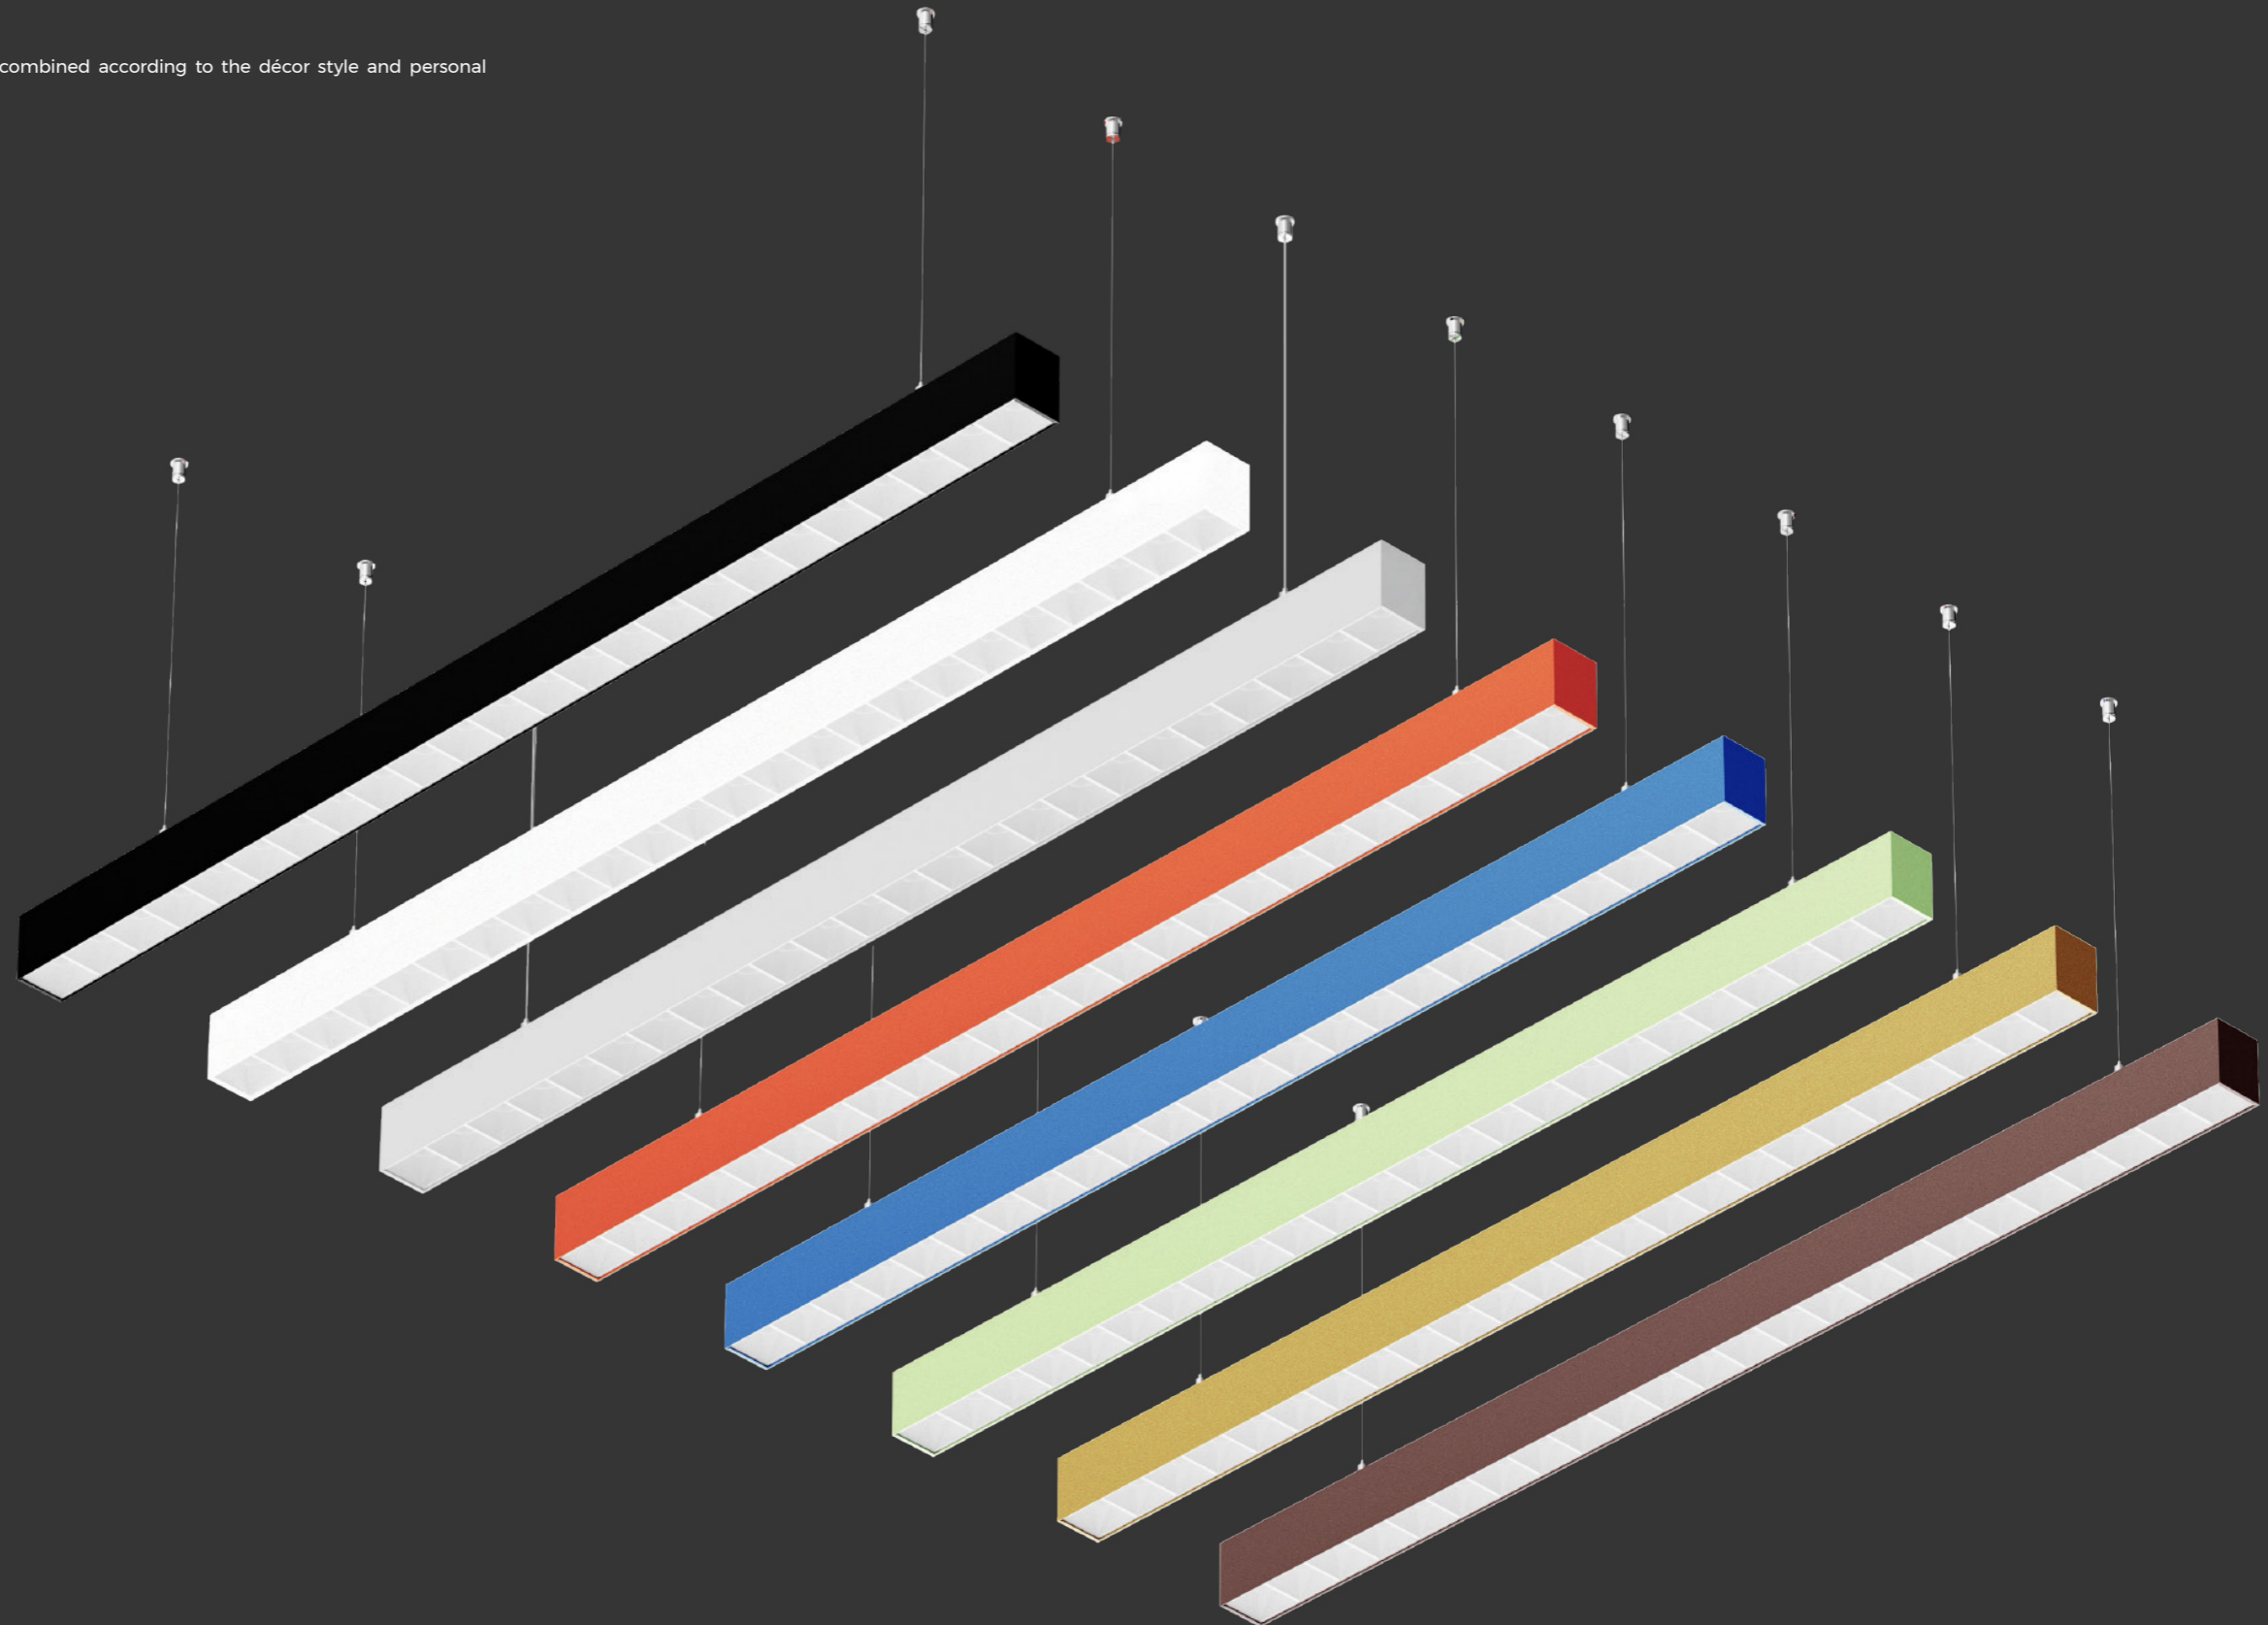

**DIP switch color temperature adjustment**

The lamp supports three color temperature adjustments to meet a variety of lighting needs. Switch the color temperature as you like, and be flexible. Reduce the pressure of backup.

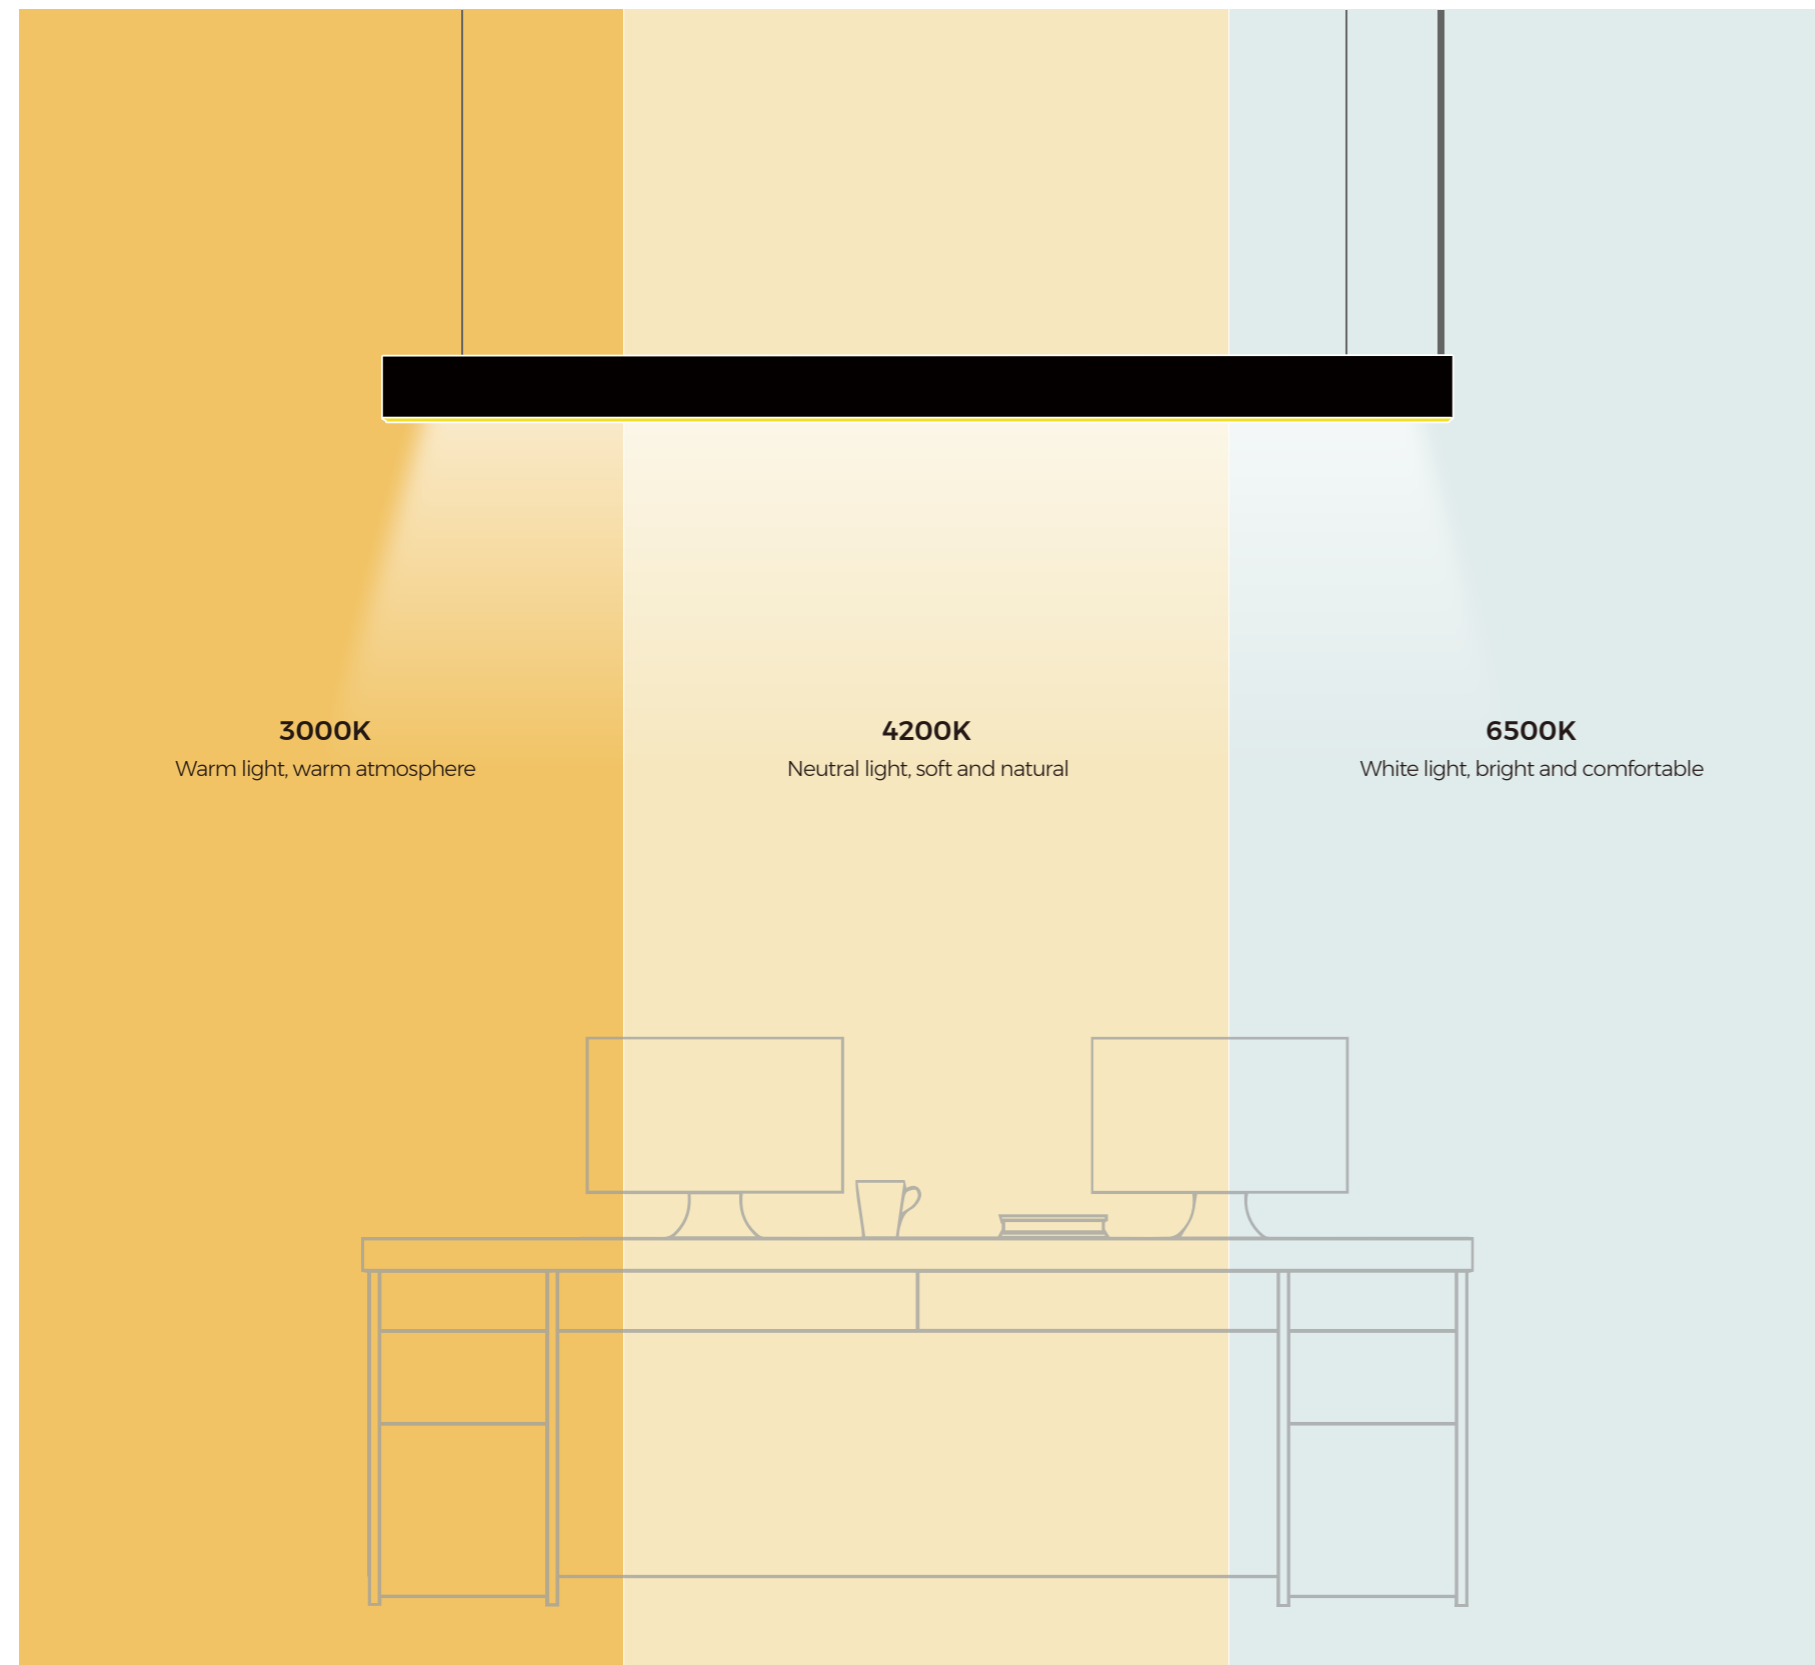

**3000K**

Warm light, warm atmosphere

**4200K**

Neutral light, soft and natural

**6500K**

White light, bright and comfortable

**Surface mounted**



**Pendant**



**Pendant**  
Up & down light



## DIP Switch For Power Adjustment

It supports three-level power regulation, allowing users to freely switch the power of the lamps to meet brightness requirements in different scenarios. The operation is flexible and convenient, significantly reducing inventory pressure.



**Certification & Warranty**

Handpicked international brand LUMILEDS, LM80, CE, UKCA certified, 5-year warranty.

SDCM≤3



Brand LEDs

**LUMILEDS**

High CRI



CRI>80

CRI>90



## LS35FD

Diffuser

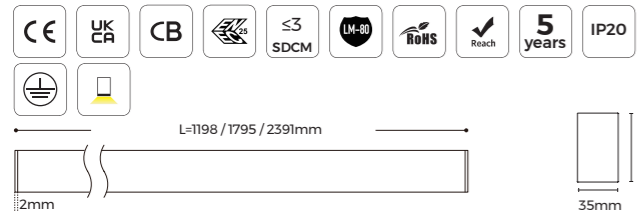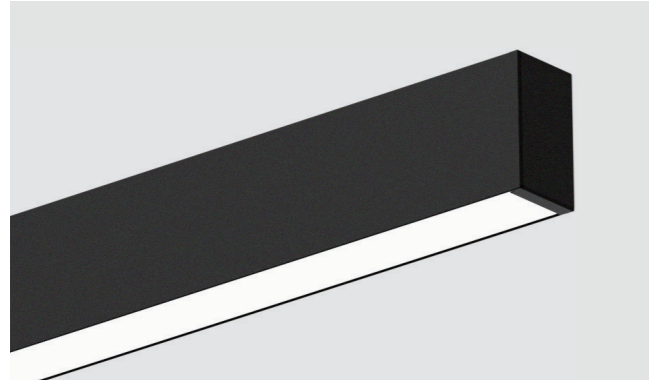

Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	29 / 45 / 58
	Lumen(LM)	3190 / 4950 / 6380
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	3080 / 4620 / 6160
Light efficiency(LM/W)	110 / 140	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D	
Junction box	PY(E)-D	

#### Light Distribution - Regular





#### Light Distribution - High efficiency



## LS35FP-V2

Prismatic

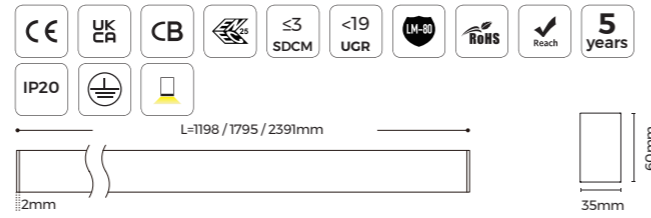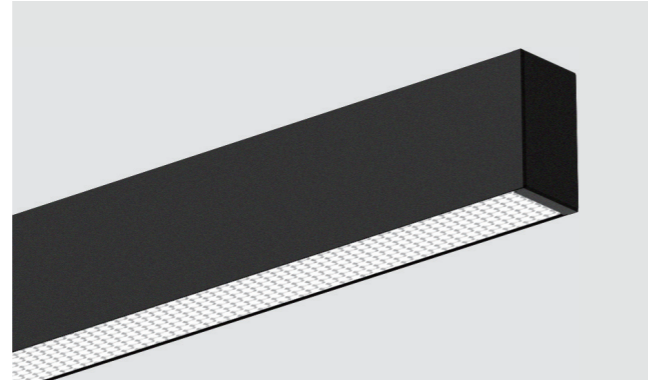

Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	22 / 33 / 44
	Lumen(LM)	2090 / 3135 / 4180
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	2640 / 3960 / 5280
Light efficiency(LM/W)	95 / 120	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D	
Junction box	PY(E)-D	

#### Light Distribution - Regular





#### Light Distribution - High efficiency



## LS50FD

Diffuser

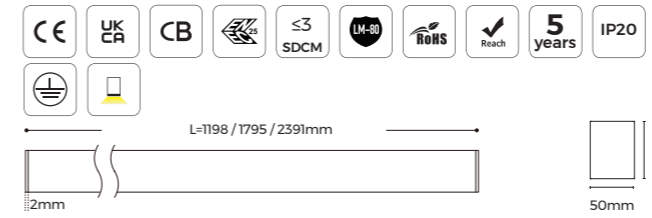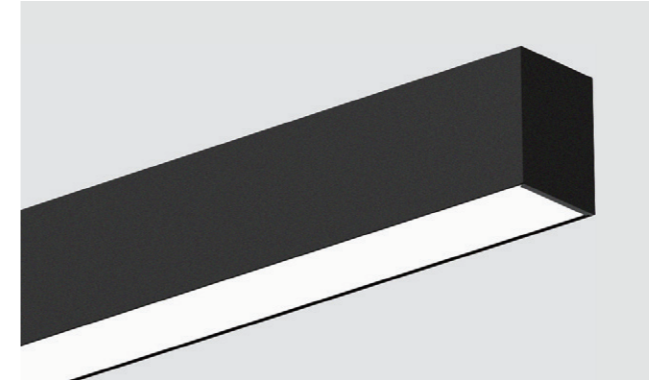

Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	38 / 58 / 76
	Lumen(LM)	4180 / 6380 / 8360
High-efficiency	Power(W)	28 / 42 / 56
	Lumen(LM)	4200 / 6300 / 8400
Light efficiency(LM/W)	110 / 150	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D	
Junction box	PY(E)-D	

#### Light Distribution - Regular





#### Light Distribution - High efficiency



## LS50FP-V2

Prismatic

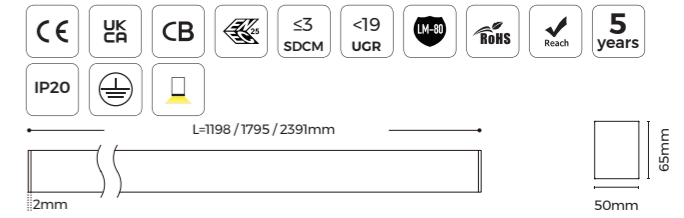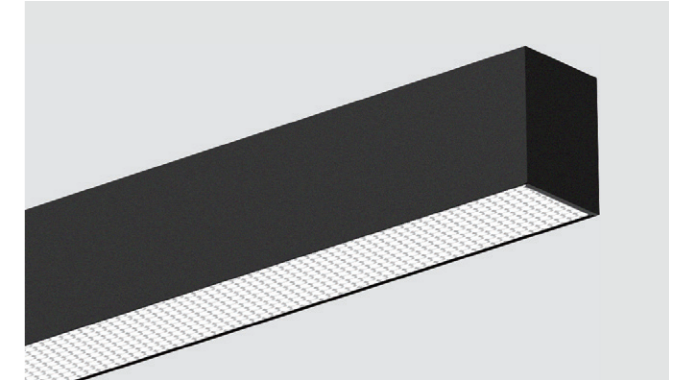

Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	22 / 33 / 44
	Lumen(LM)	2200 / 3300 / 4400
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	2750 / 4125 / 5500
Light efficiency(LM/W)	100 / 125	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D	
Junction box	PY(E)-D	

#### Light Distribution - Regular





#### Light Distribution - High efficiency



## LS50G

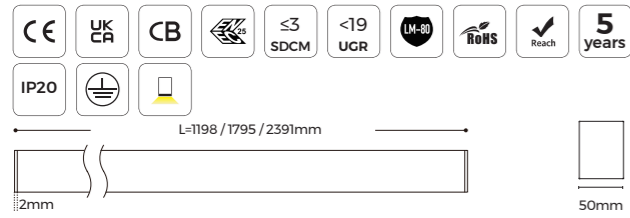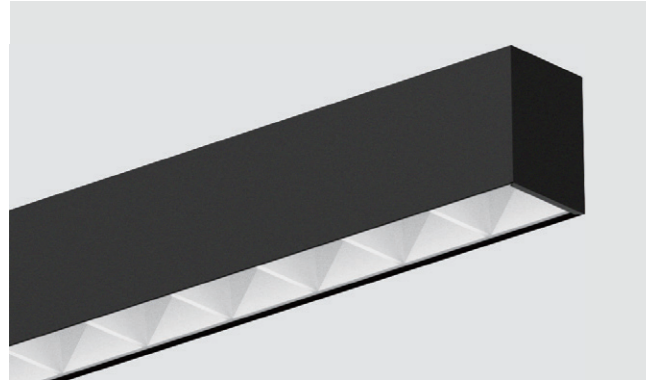

Grating




Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black /White (Spraying)
Control	ON/OFF /1-10V / DALI2+PUSH

Luminaire Parameters	
Input voltage	AC220-240V
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500K
Length (mm)	1200 / 1800 / 2400
Power(W)	34 / 52 / 68
Lumen (lm)(Normal)	4420 / 6760 / 8840
Light efficiency(LM/W)(Normal)	130
Beam angle	90° x80°

\* The above parameters are based on Ra80, 4000K white luminaires.



Installation Accessories	
Pendant cable	PN(E)-D 
Junction box	PY(E)-D 

### Light Distribution - Regular



## LS70FD

Diffuser

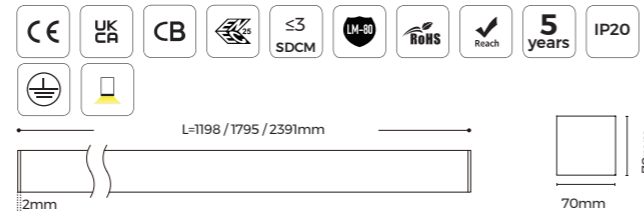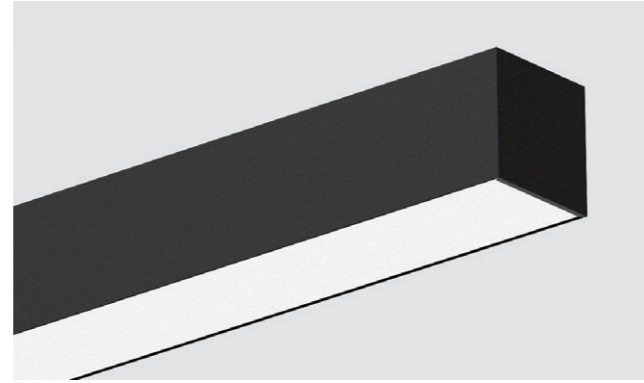


Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black /White (Spraying)
Control	ON/OFF /1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	47 / 70 / 90
	Lumen(LM)	5405 / 8050 / 10350
High-efficiency	Power(W)	36 / 54 / 72
	Lumen(LM)	5400 / 8100 / 10800
Light efficiency(LM/W)	115 / 150	


\* The above parameters are based on Ra80, 4000K white luminaires.  
<sup>①</sup> The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D 
Junction box	PY(E)-D 

### Light Distribution - Regular





### Light Distribution - High efficiency



## LS70FP-V2

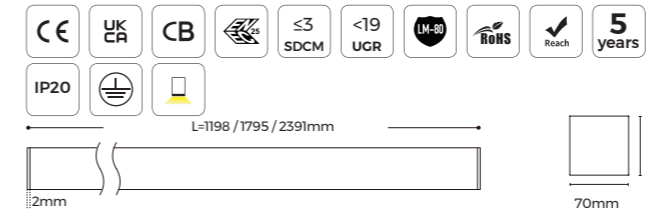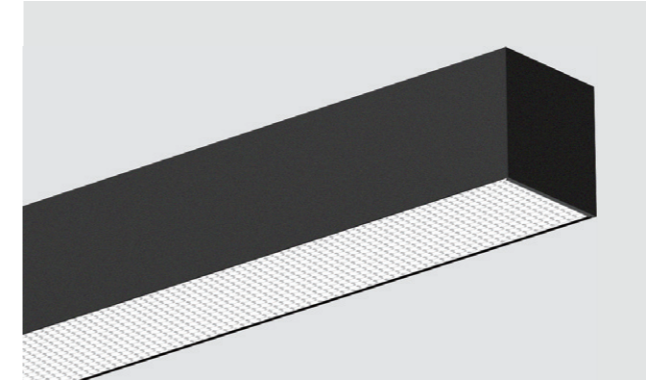

Prismatic




Basic Parameters	
Installation	Pendant, Surface mounted
Material	AL6063-T5
Coating	Black /White (Spraying)
Control	ON/OFF /1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	28 / 42 / 56
	Lumen(LM)	3080 / 4620 / 6160
High-efficiency	Power(W)	28 / 42 / 56
	Lumen(LM)	3780 / 5670 / 7560
Light efficiency(LM/W)	110 / 135	


\* The above parameters are based on Ra80, 4000K white luminaires.  
<sup>①</sup> The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D 
Junction box	PY(E)-D 

### Light Distribution - Regular





### Light Distribution - High efficiency



## LH35FD

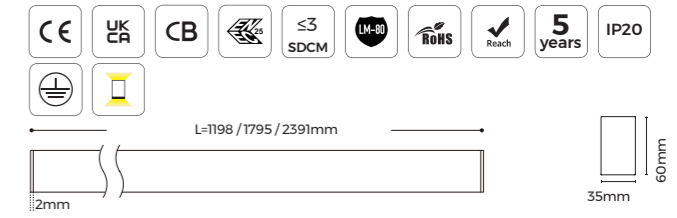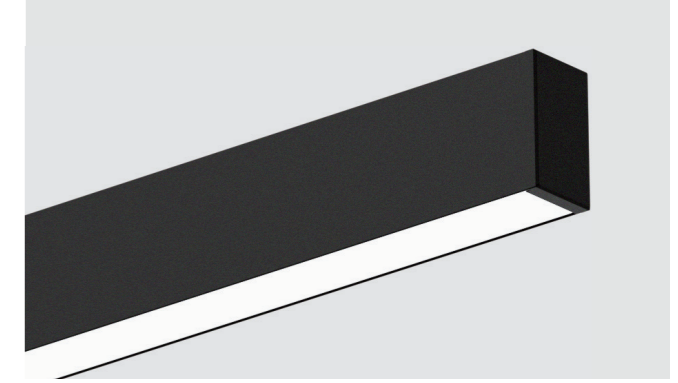

Diffuser




Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black /White (Spraying)
Control	ON/OFF /1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	45 / 67 / 90
	Lumen(LM)	4950 / 7370 / 9900
High-efficiency	Power(W)	33 / 50 / 66
	Lumen(LM)	4620 / 7000 / 9240
Light efficiency(LM/W)	110 / 140	


\* The above parameters are based on Ra80, 4000K white luminaires.  
<sup>①</sup> The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D 
Junction box	PY(E)-D 

### Light Distribution - Regular





### Light Distribution - High efficiency



# LH35FP-V2

Prismatic

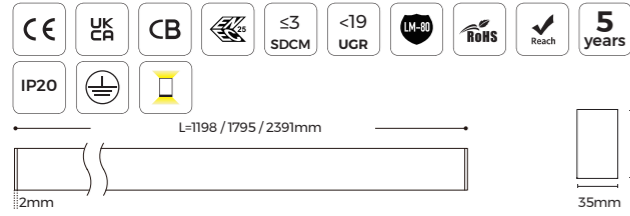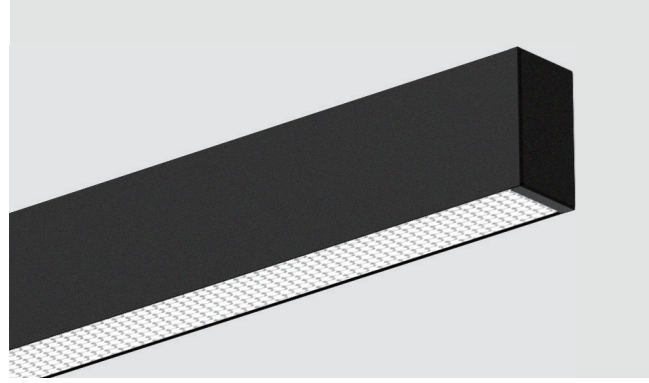


Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	33 / 49 / 66
	Lumen(LM)	3465 / 5145 / 6930
High-efficiency	Power(W)	33 / 49 / 66
	Lumen(LM)	4125 / 6125 / 8250
Light efficiency(LM/W)	105 / 125	



\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D
Junction box	PY(E)-D

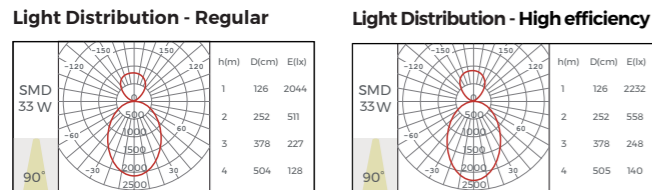

# LH50FD

Diffuser

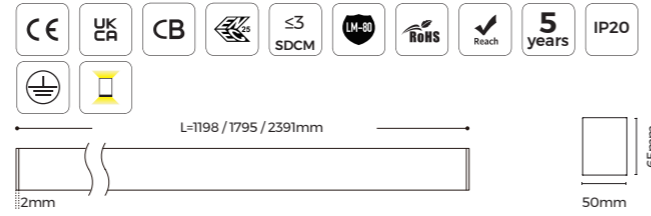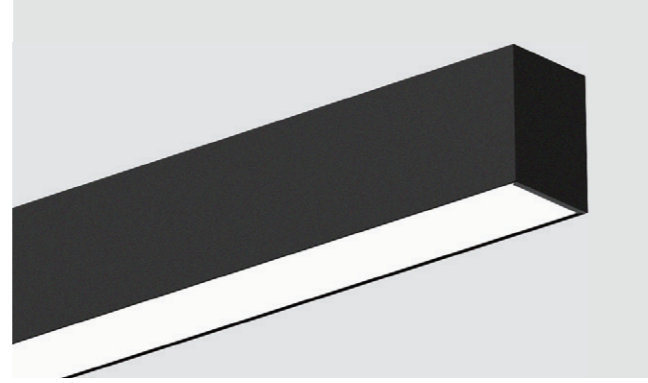


Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	58 / 90 / 120
	Lumen(LM)	6380 / 9900 / 13200
High-efficiency	Power(W)	47 / 70 / 86
	Lumen(LM)	7050 / 10500 / 12900
Light efficiency(LM/W)	110 / 150	



\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D
Junction box	PY(E)-D

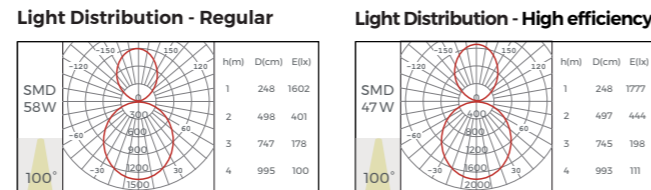

# LH50FP-V2

Prismatic

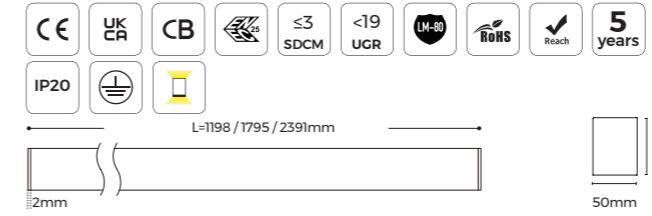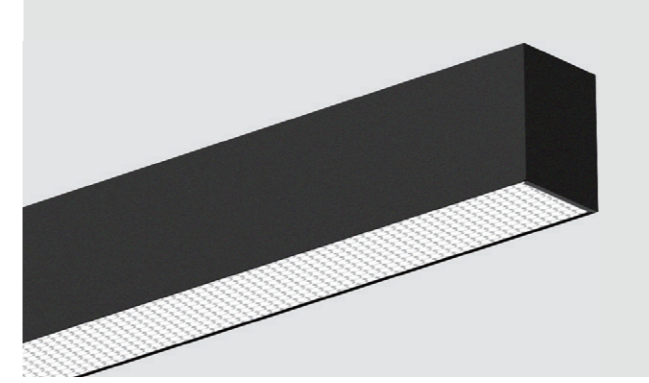


Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	38 / 57 / 76
	Lumen(LM)	4180 / 6270 / 8360
High-efficiency	Power(W)	38 / 57 / 76
	Lumen(LM)	4940 / 7410 / 9880
Light efficiency(LM/W)	110 / 130	



\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Installation Accessories	
Pendant cable	PN(E)-D
Junction box	PY(E)-D

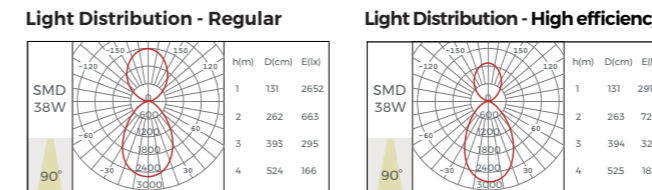

# LH50G

Grating

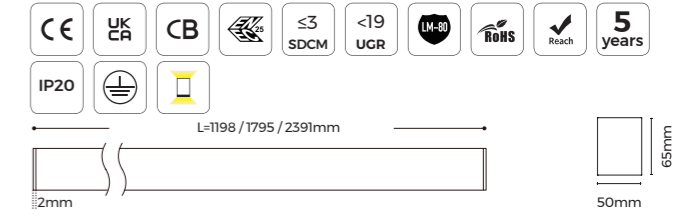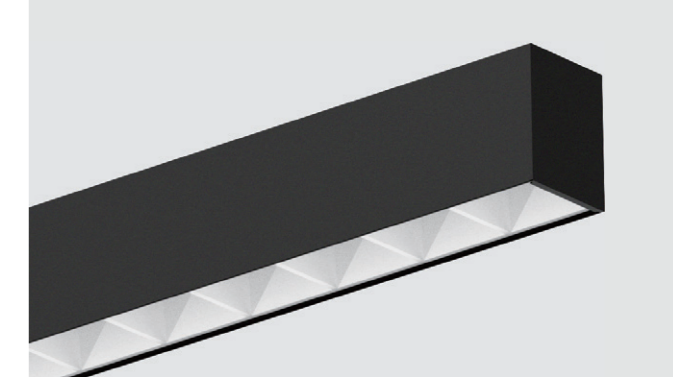


Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

Luminaire Parameters	
Input voltage	AC220-240V
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500K
Length (mm)	1200 / 1800 / 2400
Power(W)	52 / 80 / 100
Lumen (lm) Up (Normal)	2059 / 3168 / 3960
Lumen (lm) Down (Normal)	4181 / 6432 / 8040
Light efficiency(LM/W) (Normal)	120
Beam angle	90° x 80°



\* The above parameters are based on Ra80, 4000K white luminaires.

Installation Accessories	
Pendant cable	PN(E)-D
Junction box	PY(E)-D

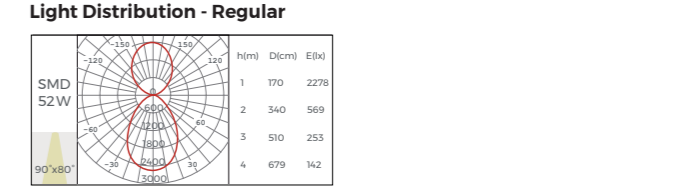

# LH70FD

Diffuser

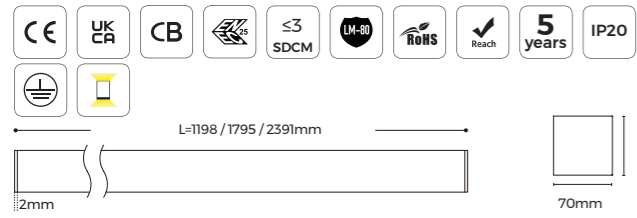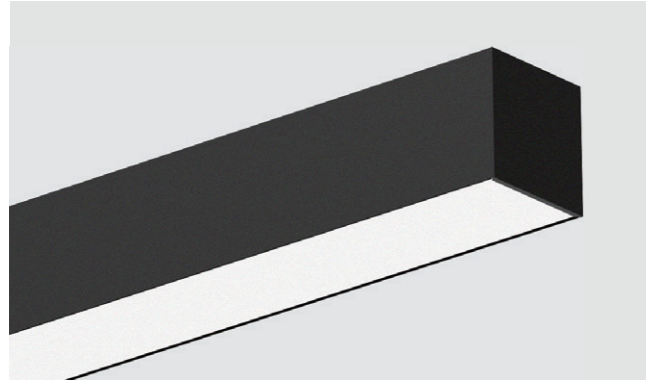

Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	70 / 106 / 140
	Lumen(LM)	7700 / 11660 / 15400
High-efficiency	Power(W)	54 / 81 / 108
	Lumen(LM)	8100 / 12150 / 16200
Light efficiency(LM/W)	110 / 150	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D
Junction box	PY(E)-D

### Light Distribution - Regular





### Light Distribution - High efficiency



# LH70FP-V2

Prismatic

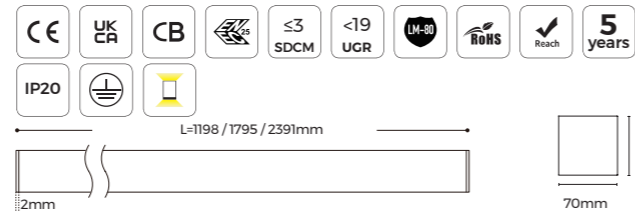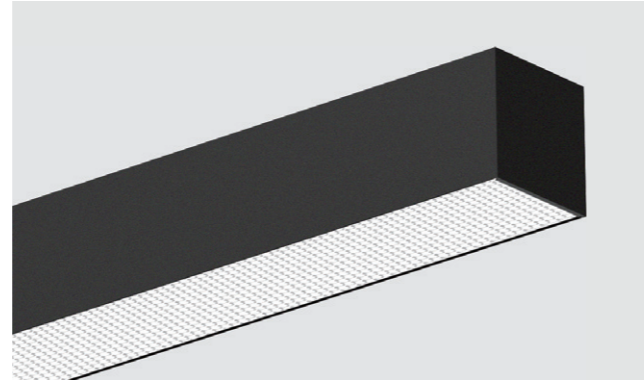

Basic Parameters	
Installation	Pendant
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	47 / 70 / 86
	Lumen(LM)	5170 / 7700 / 9460
High-efficiency	Power(W)	47 / 70 / 86
	Lumen(LM)	6345 / 9450 / 11610
Light efficiency(LM/W)	110 / 135	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


### Installation Accessories

Pendant cable	PN(E)-D
Junction box	PY(E)-D

### Light Distribution - Regular





### Light Distribution - High efficiency



# LE35FD

Diffuser

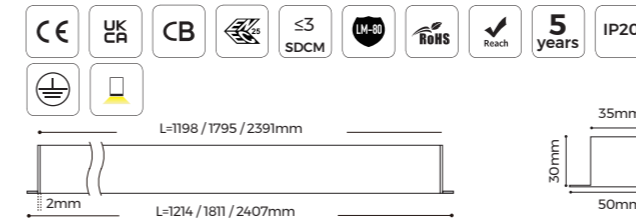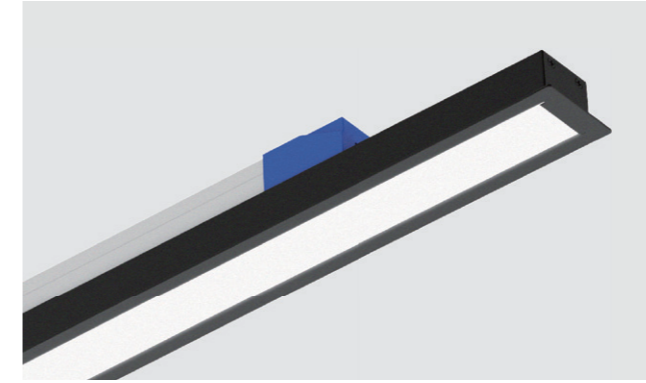


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	29 / 45 / 58
	Lumen(LM)	3190 / 4950 / 6380
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	3080 / 4620 / 6160
Light efficiency(LM/W)	110 / 140	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

### Light Distribution - Regular





### Light Distribution - High efficiency



# LE35FP-V2

Prismatic

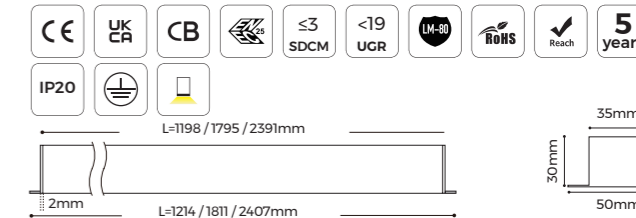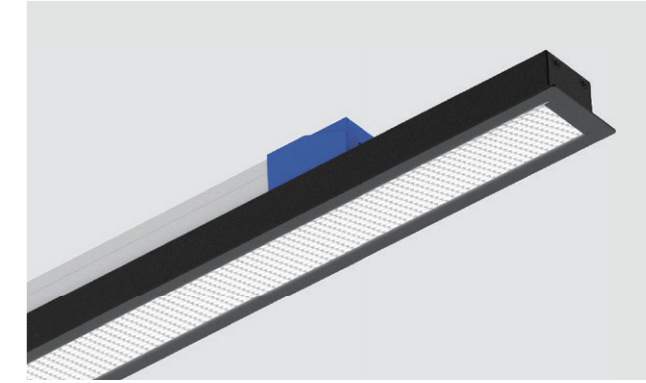


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

### Luminaire Parameters


Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	22 / 33 / 44
	Lumen(LM)	2090 / 3135 / 4180
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	2640 / 3960 / 5280
Light efficiency(LM/W)	95 / 120	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

### Light Distribution - Regular





### Light Distribution - High efficiency



## LE50FD

Diffuser

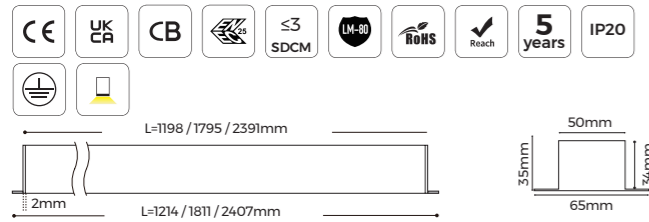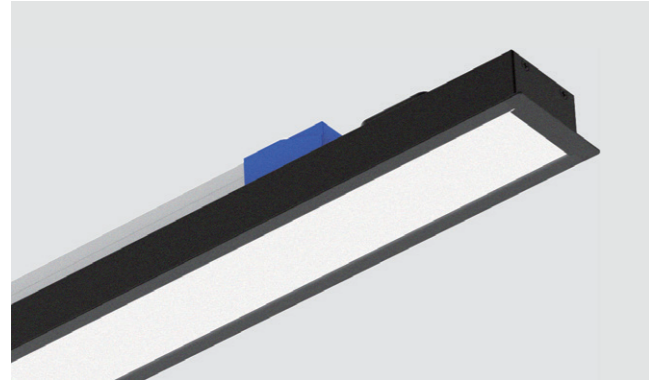


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH


Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	38 / 58 / 76
	Lumen(LM)	4180 / 6380 / 8360
High-efficiency	Power(W)	28 / 42 / 56
	Lumen(LM)	4200 / 6300 / 8400
Light efficiency(LM/W)	110 / 150	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

### Light Distribution - Regular





### Light Distribution - High efficiency



## LE50FP-V2

Prismatic

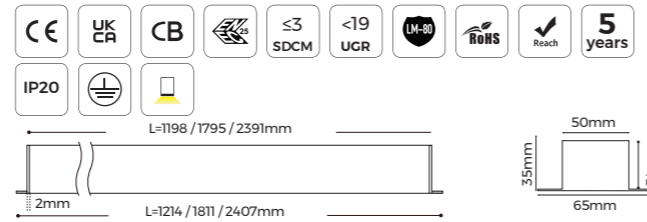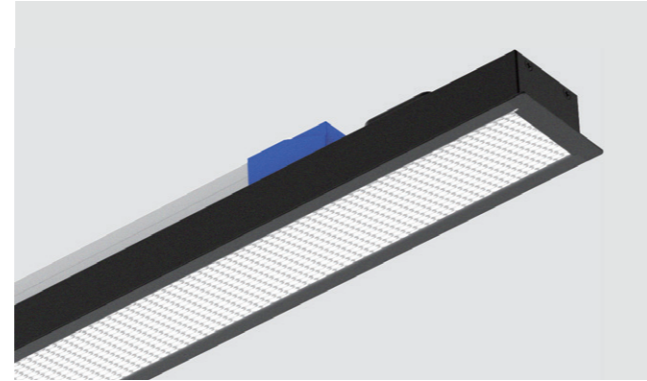


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH


Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	22 / 33 / 44
	Lumen(LM)	2200 / 3300 / 4400
High-efficiency	Power(W)	22 / 33 / 44
	Lumen(LM)	2750 / 4125 / 5500
Light efficiency(LM/W)	100 / 125	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

### Light Distribution - Regular





### Light Distribution - High efficiency



## LE50G

Grating

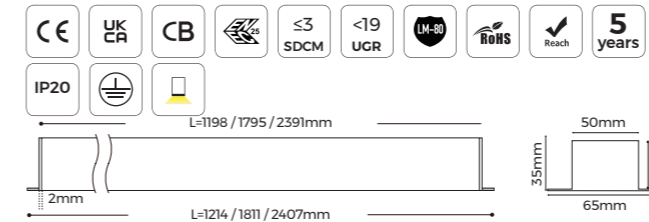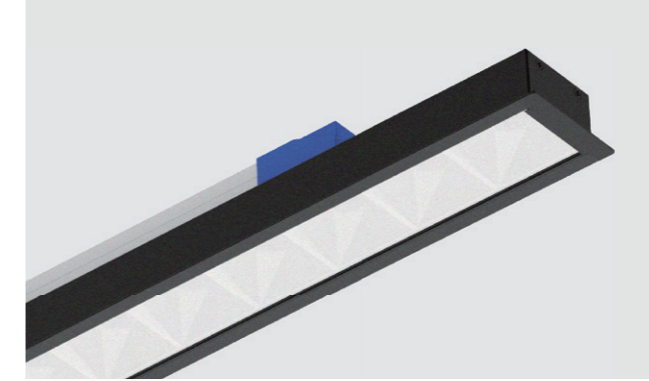


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH

Luminaire Parameters	
Input voltage	AC220-240V
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500K
Length (mm)	1200 / 1800 / 2400
Power(W)	34 / 52 / 68
Luminous flux (lm) (Normal)	4420 / 6760 / 8840
Light efficiency(LM/W) (Normal)	130
Beam angle	90° x 80°



\* The above parameters are based on Ra80, 4000K white luminaires.

### Light Distribution - Regular



## LE70FD

Diffuser

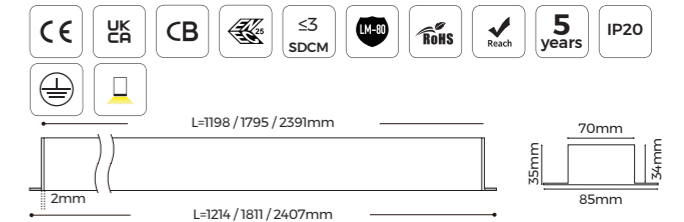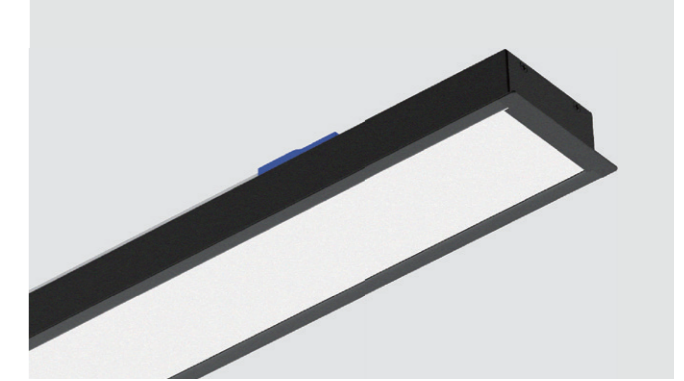


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH


Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	47 / 70 / 90
	Lumen(LM)	5405 / 8050 / 10350
High-efficiency	Power(W)	36 / 54 / 72
	Lumen(LM)	5400 / 8100 / 10800
Light efficiency(LM/W)	115 / 150	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

### Light Distribution - Regular





### Light Distribution - High efficiency



# LE70FP-V2

Prismatic

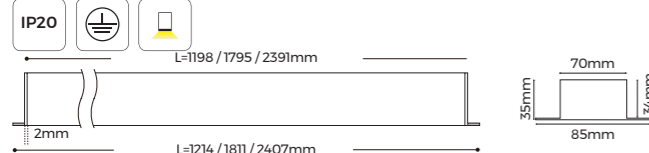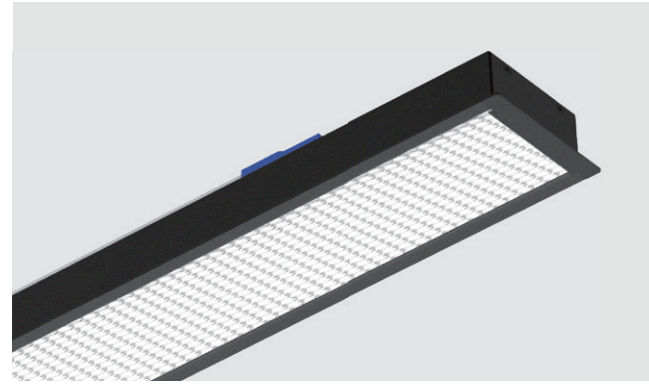


Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Black / White (Spraying)
Control	ON/OFF / 1-10V / DALI2+PUSH


Luminaire Parameters		
Input voltage	AC220-240V	
CRI	80 / 90	
CCT	2700K / 3000K / 4000K / 6500K / 3CCT Dial Switch <sup>①</sup>	
Length (mm)	1200 / 1800 / 2400	
Regular	Power(W)	28 / 42 / 56
	Lumen(LM)	3080 / 4620 / 6160
High-efficiency	Power(W)	28 / 42 / 56
	Lumen(LM)	3780 / 5670 / 7560
Light efficiency(LM/W)	110 / 135	

\* The above parameters are based on Ra80, 4000K white luminaires.  
 ① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K

Light Distribution - Regular




Light Distribution - High efficiency




**Application Scenarios - Pendant & Surface mounted**

\* The above parameters are based on Ra80, 4000K Light source.

**35mm**

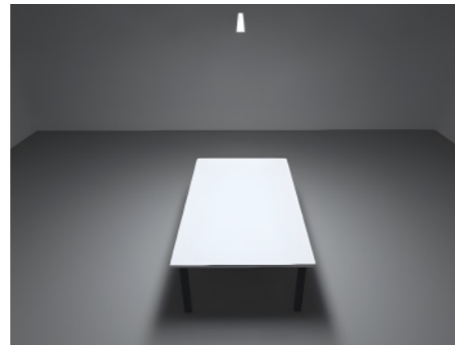

Model	Installation height	Desk center illumination
LE35FD	3M	300LX
LS35FD		

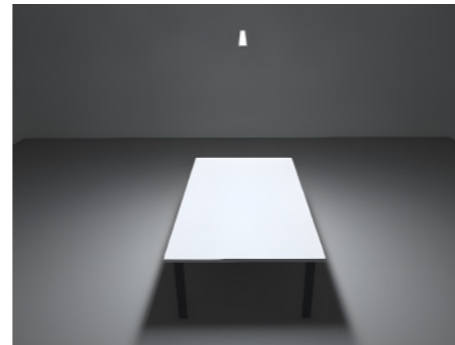


Model	Installation height	Desk center illumination
LE35FP	3M	300LX
LS35FP		


**50mm**



Model	Installation height	Desk center illumination
LE50FD	3M	350LX
LS50FD		

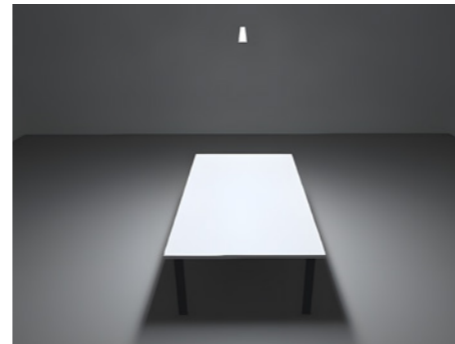


Model	Installation height	Desk center illumination
LE50FP	3M	350LX
LS50FP		

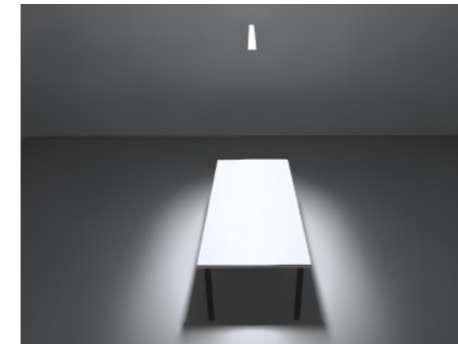


Model	Installation height	Desk center illumination
LE50G	3M	450LX
LS50G		

**70mm**

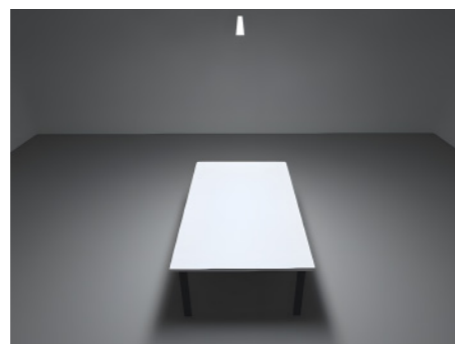

Model	Installation height	Desk center illumination
LE70FD	3M	450LX
LS70FD		

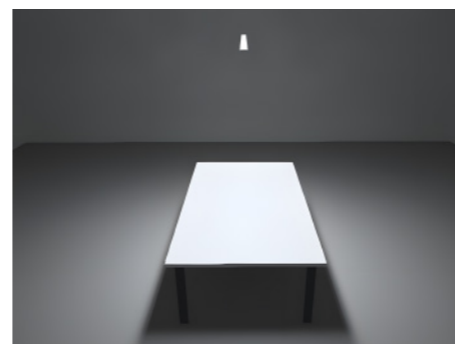


Model	Installation height	Desk center illumination
LE70FP	3M	500LX
LS70FP		


**Application Scenarios – Pendant (Up & down light)**

\* The above parameters are based on Ra80, 4000K Light source.

**35mm**

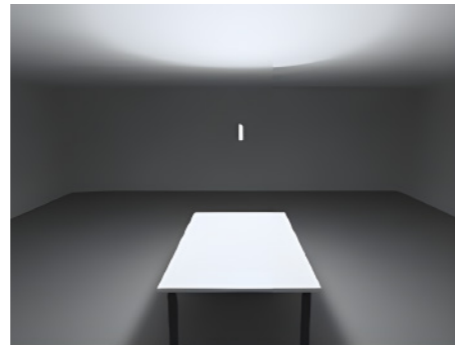


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH35FD	2.5M	500LX	1500LX

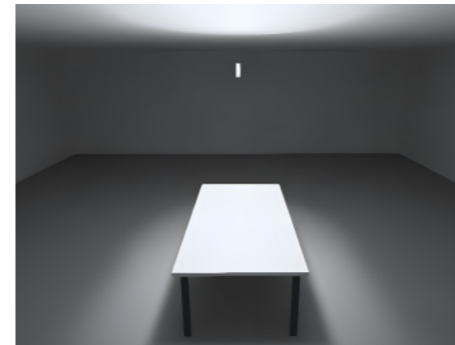


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH35FP	2.5M	500LX	1000LX


**50mm**

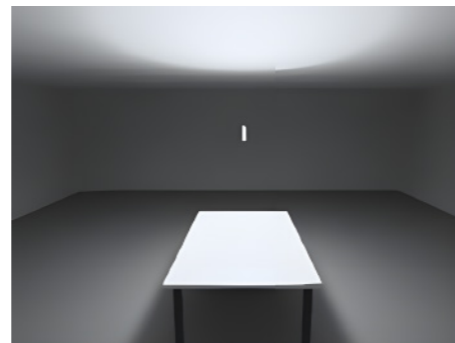

Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH50FD	2.5M	550LX	2000LX

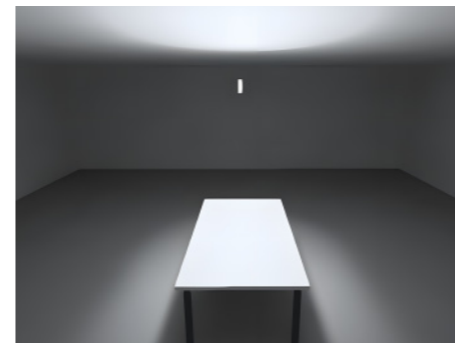


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH50FP	2.5M	600LX	1000LX

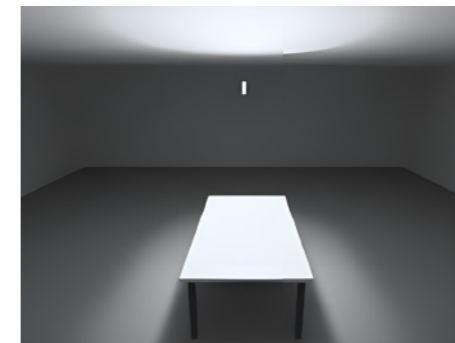


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH50G	2.5M	800LX	1500LX

**70mm**

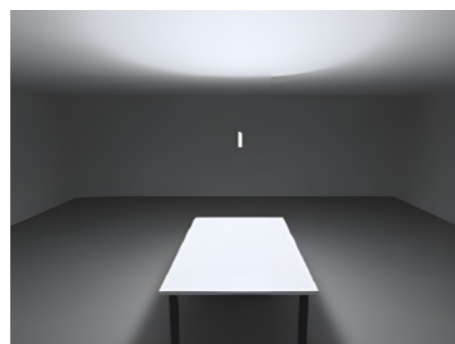


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH70FD	2.5M	700LX	2000LX

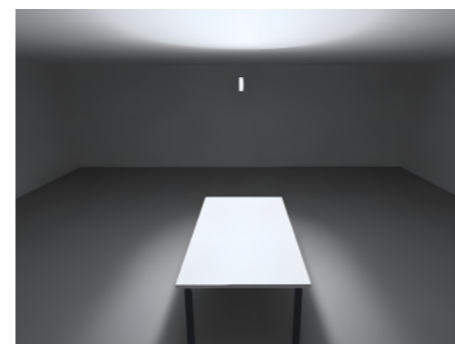


Model	Installation height	Center illuminance (lx)	
		Desktop	Smallpox
LH70FP	2.5M	750LX	1200LX

**Installation Methods**


**Pendant**

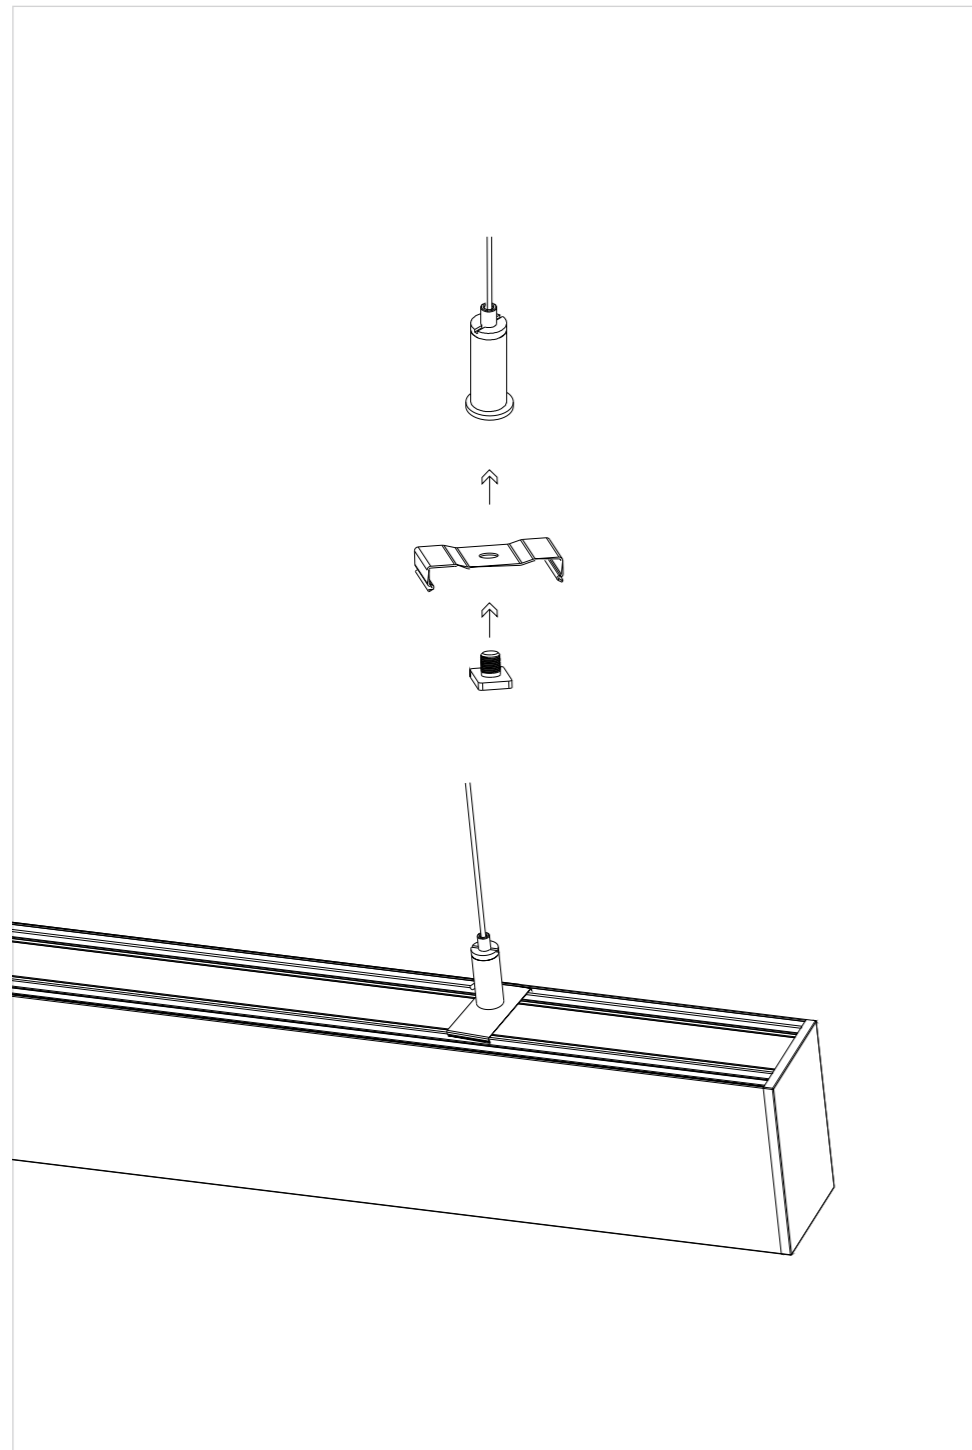

**Surface mounted**

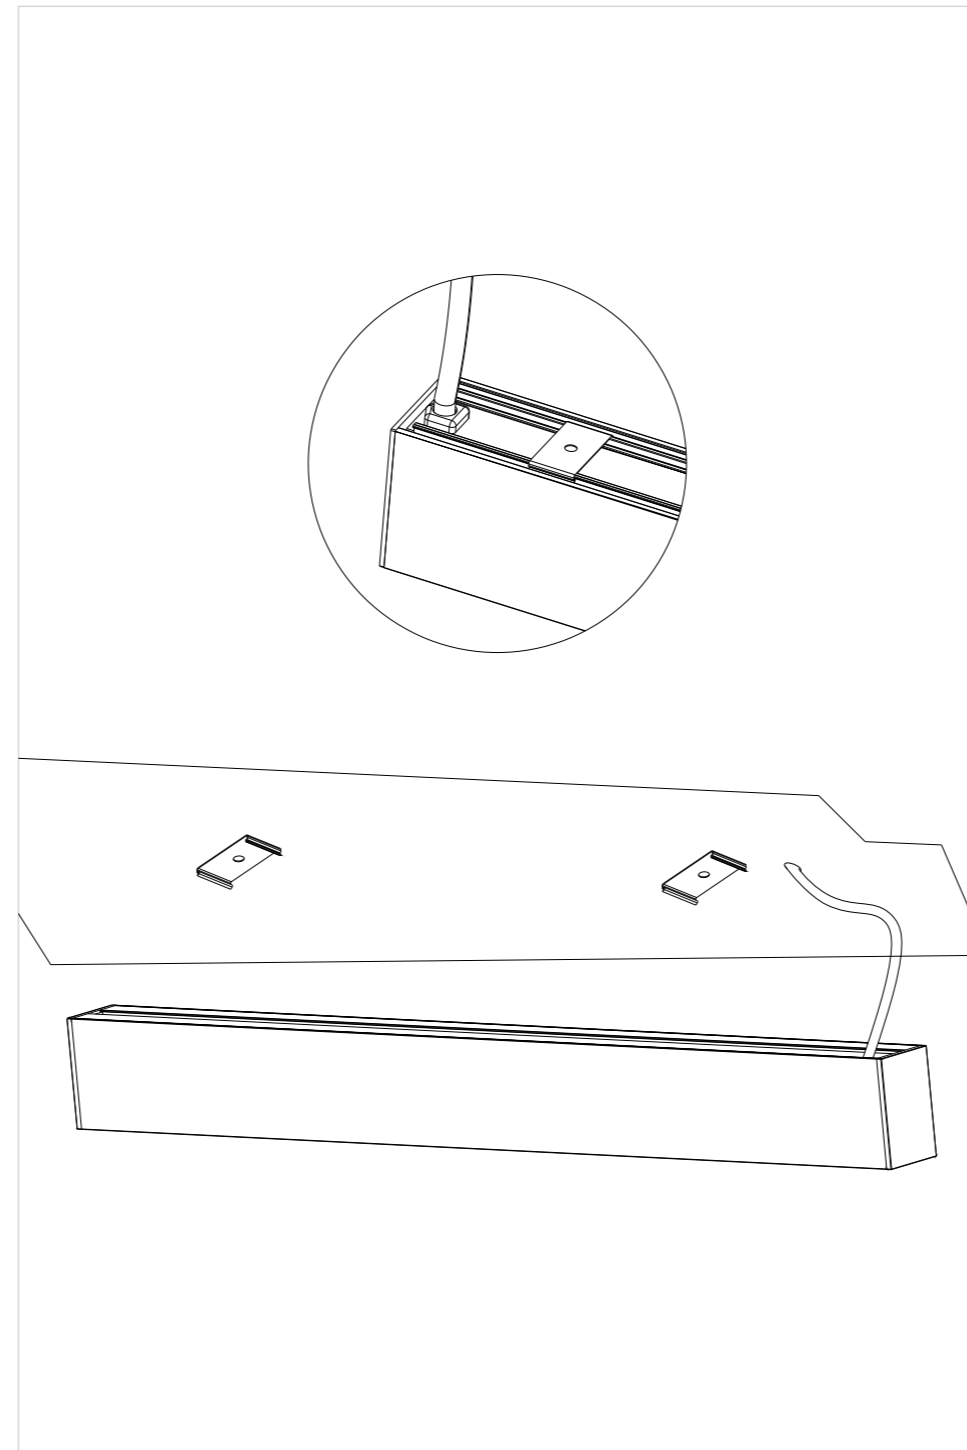

**Recessed**

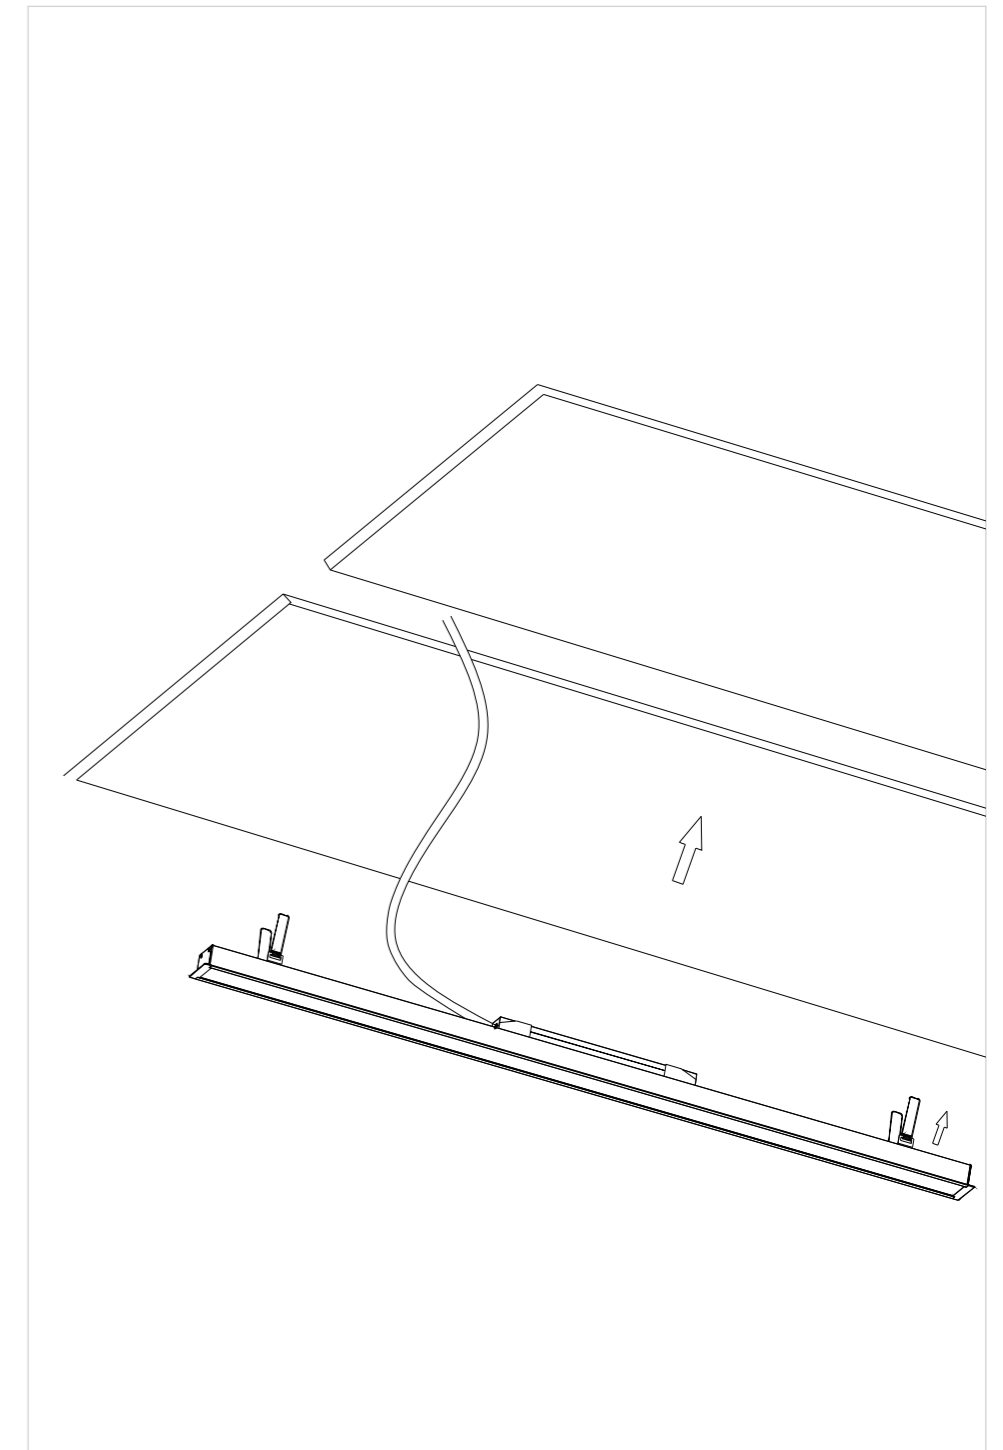









LED LINEAR &  
COMMERCIAL  
LIGHTING



Tel: +86-755-2923-1888

E-mail: [colors@colorsled.com](mailto:colors@colorsled.com)

Web: [www.colorsled.com](http://www.colorsled.com)

Add: 17F, Block B, Building 2, North of Skyworth

Inno Valley, Shiyan town, Bao'an District, Shenzhen