


# LENS NEON

Flexible 5m Cascading | Medium & High Power Wall Washer Application  
3-5-8m Wall Washing Height | Multiple Angles Available | IP67 | 5-Year Warranty

## ALS3646

Top outlet, terminal connection.



## AL3D2722

Bottom outlet, ENP plug.




## AL3D2722

3D bending, 5m max\*.

\*ALS3646 4m max.

Full coverage of 3-10m wall washing height  
Multiple angles available

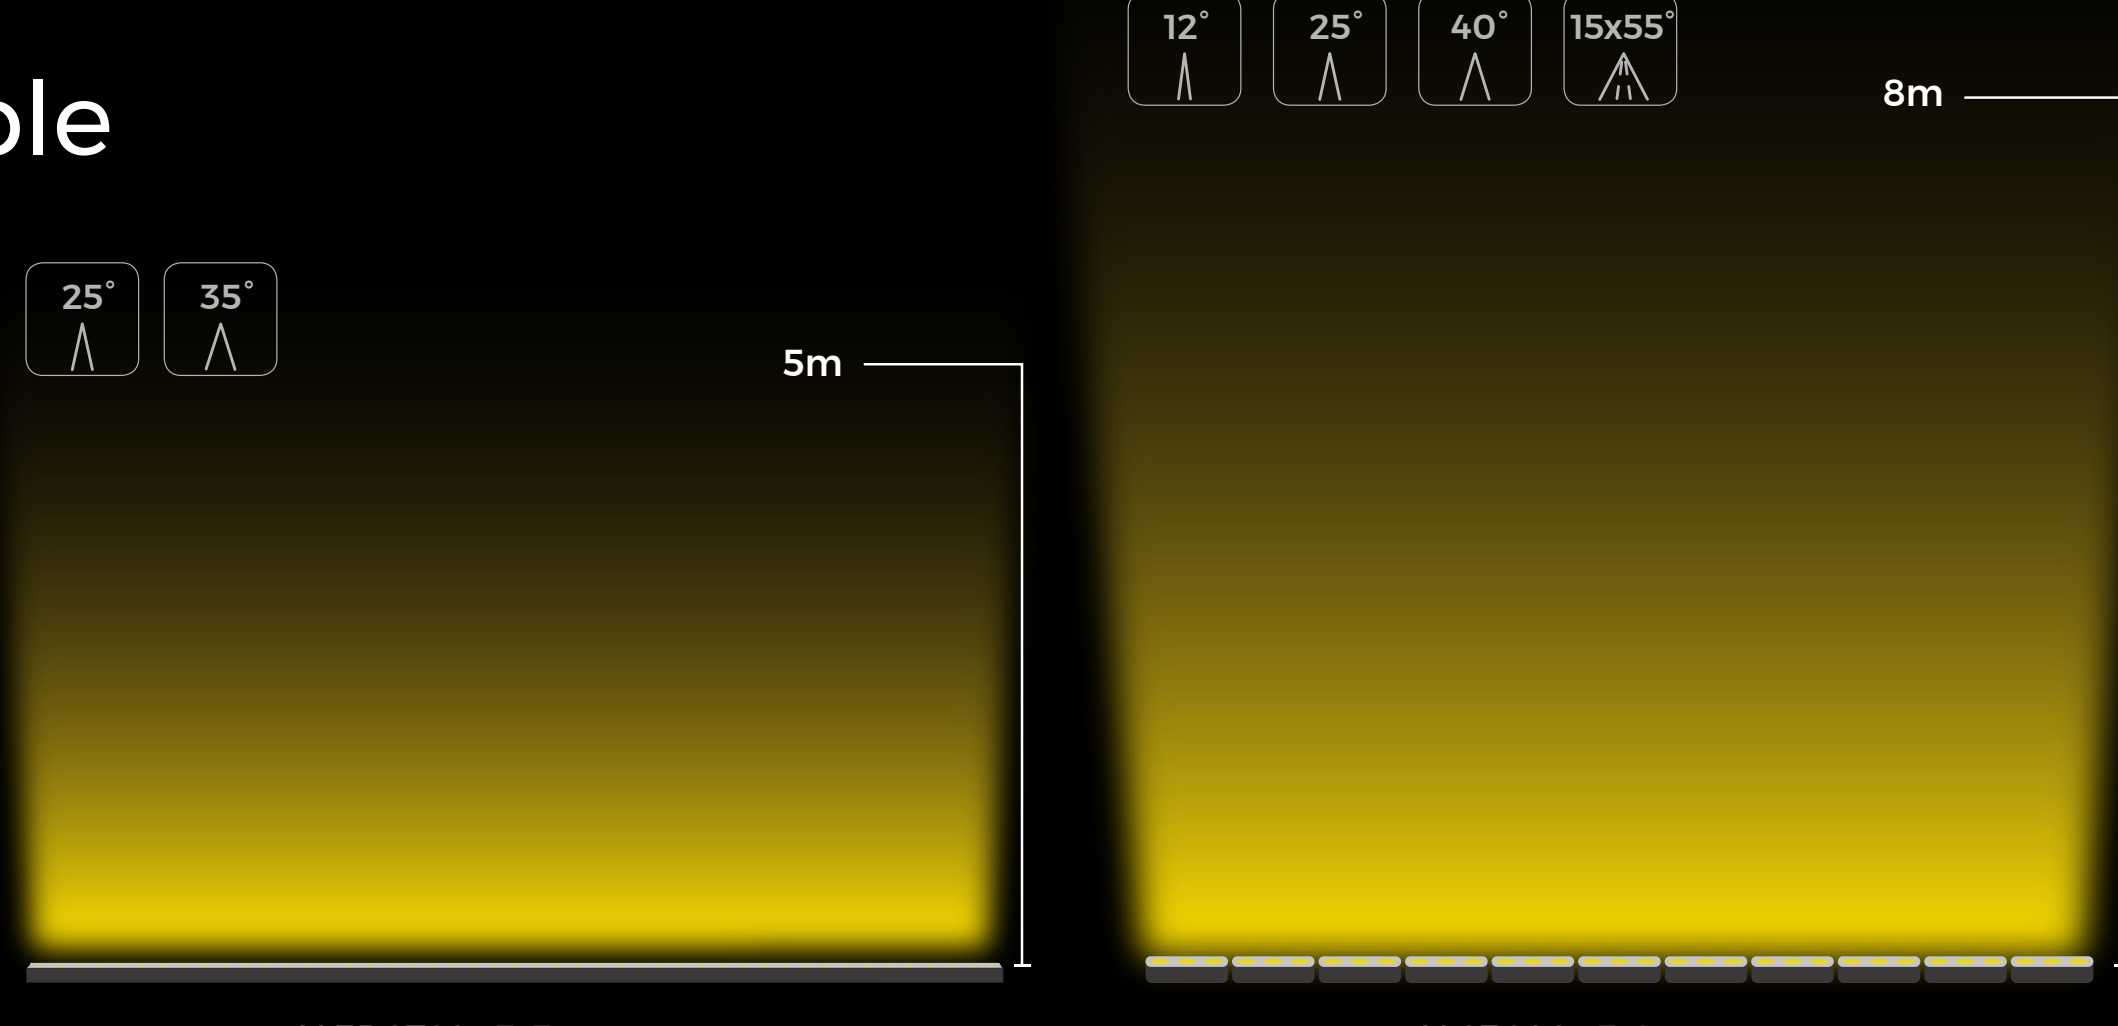


# PRODUCT APPLICATION RECOMMENDATION

### Public Buildings/Facade Wall Washing




#### Recommended models

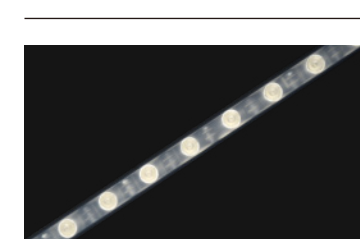


AL3D2722

**Recommendation Reasons:**  
Most facades are relatively high. AL3D2722: wall washing height 3-5m, moderate and versatile. Limited installation space and special-shaped installation surfaces. The product supports 3D bending for easy installation. Outdoor use, exposed to wind and sun. IP67 waterproof, unaffected by rain and short-term submersion. High light control requirements. 25/35° wall washing angles available, can be paired with brackets to adjust detailed angles, meeting different lighting effect needs. Difficult construction, installation and maintenance. Requires a complete product installation solution: flat mounting + (low) light shields, reserved wire outlets + high/low light barriers optional.


#### Accessories

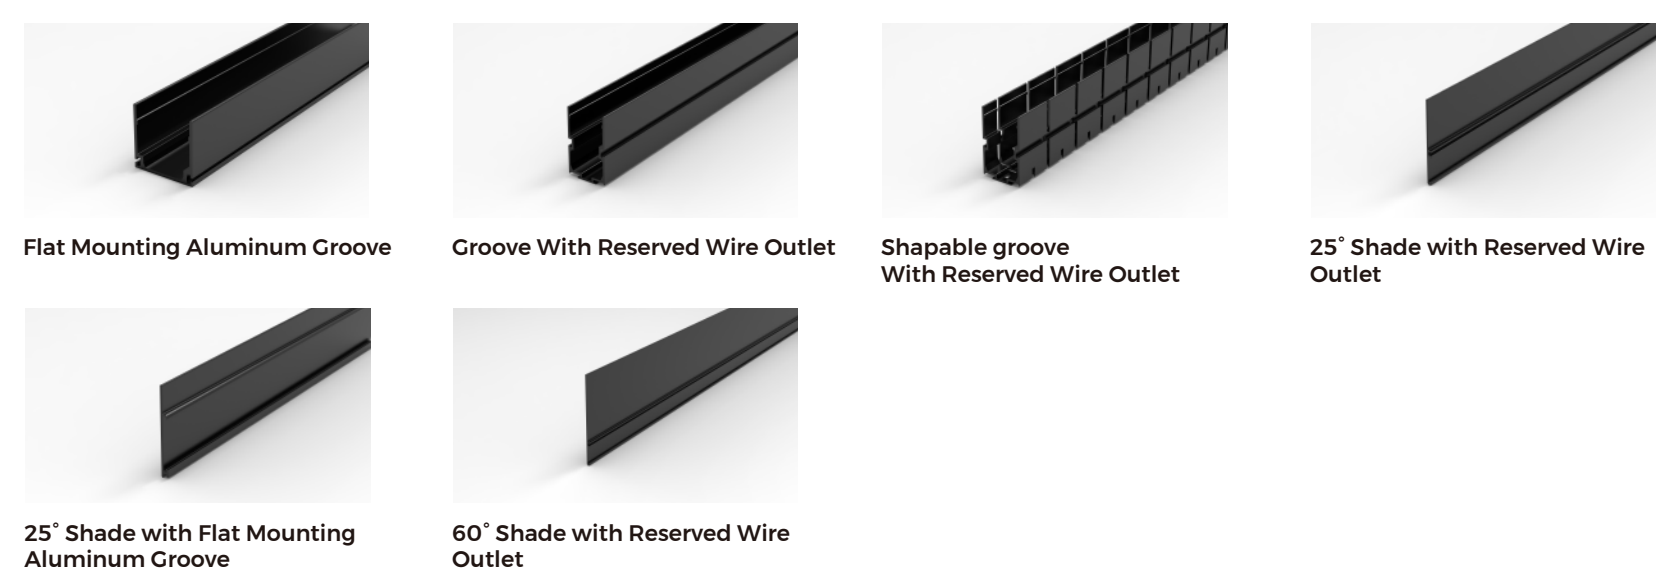

### Garden Landscape Lighting

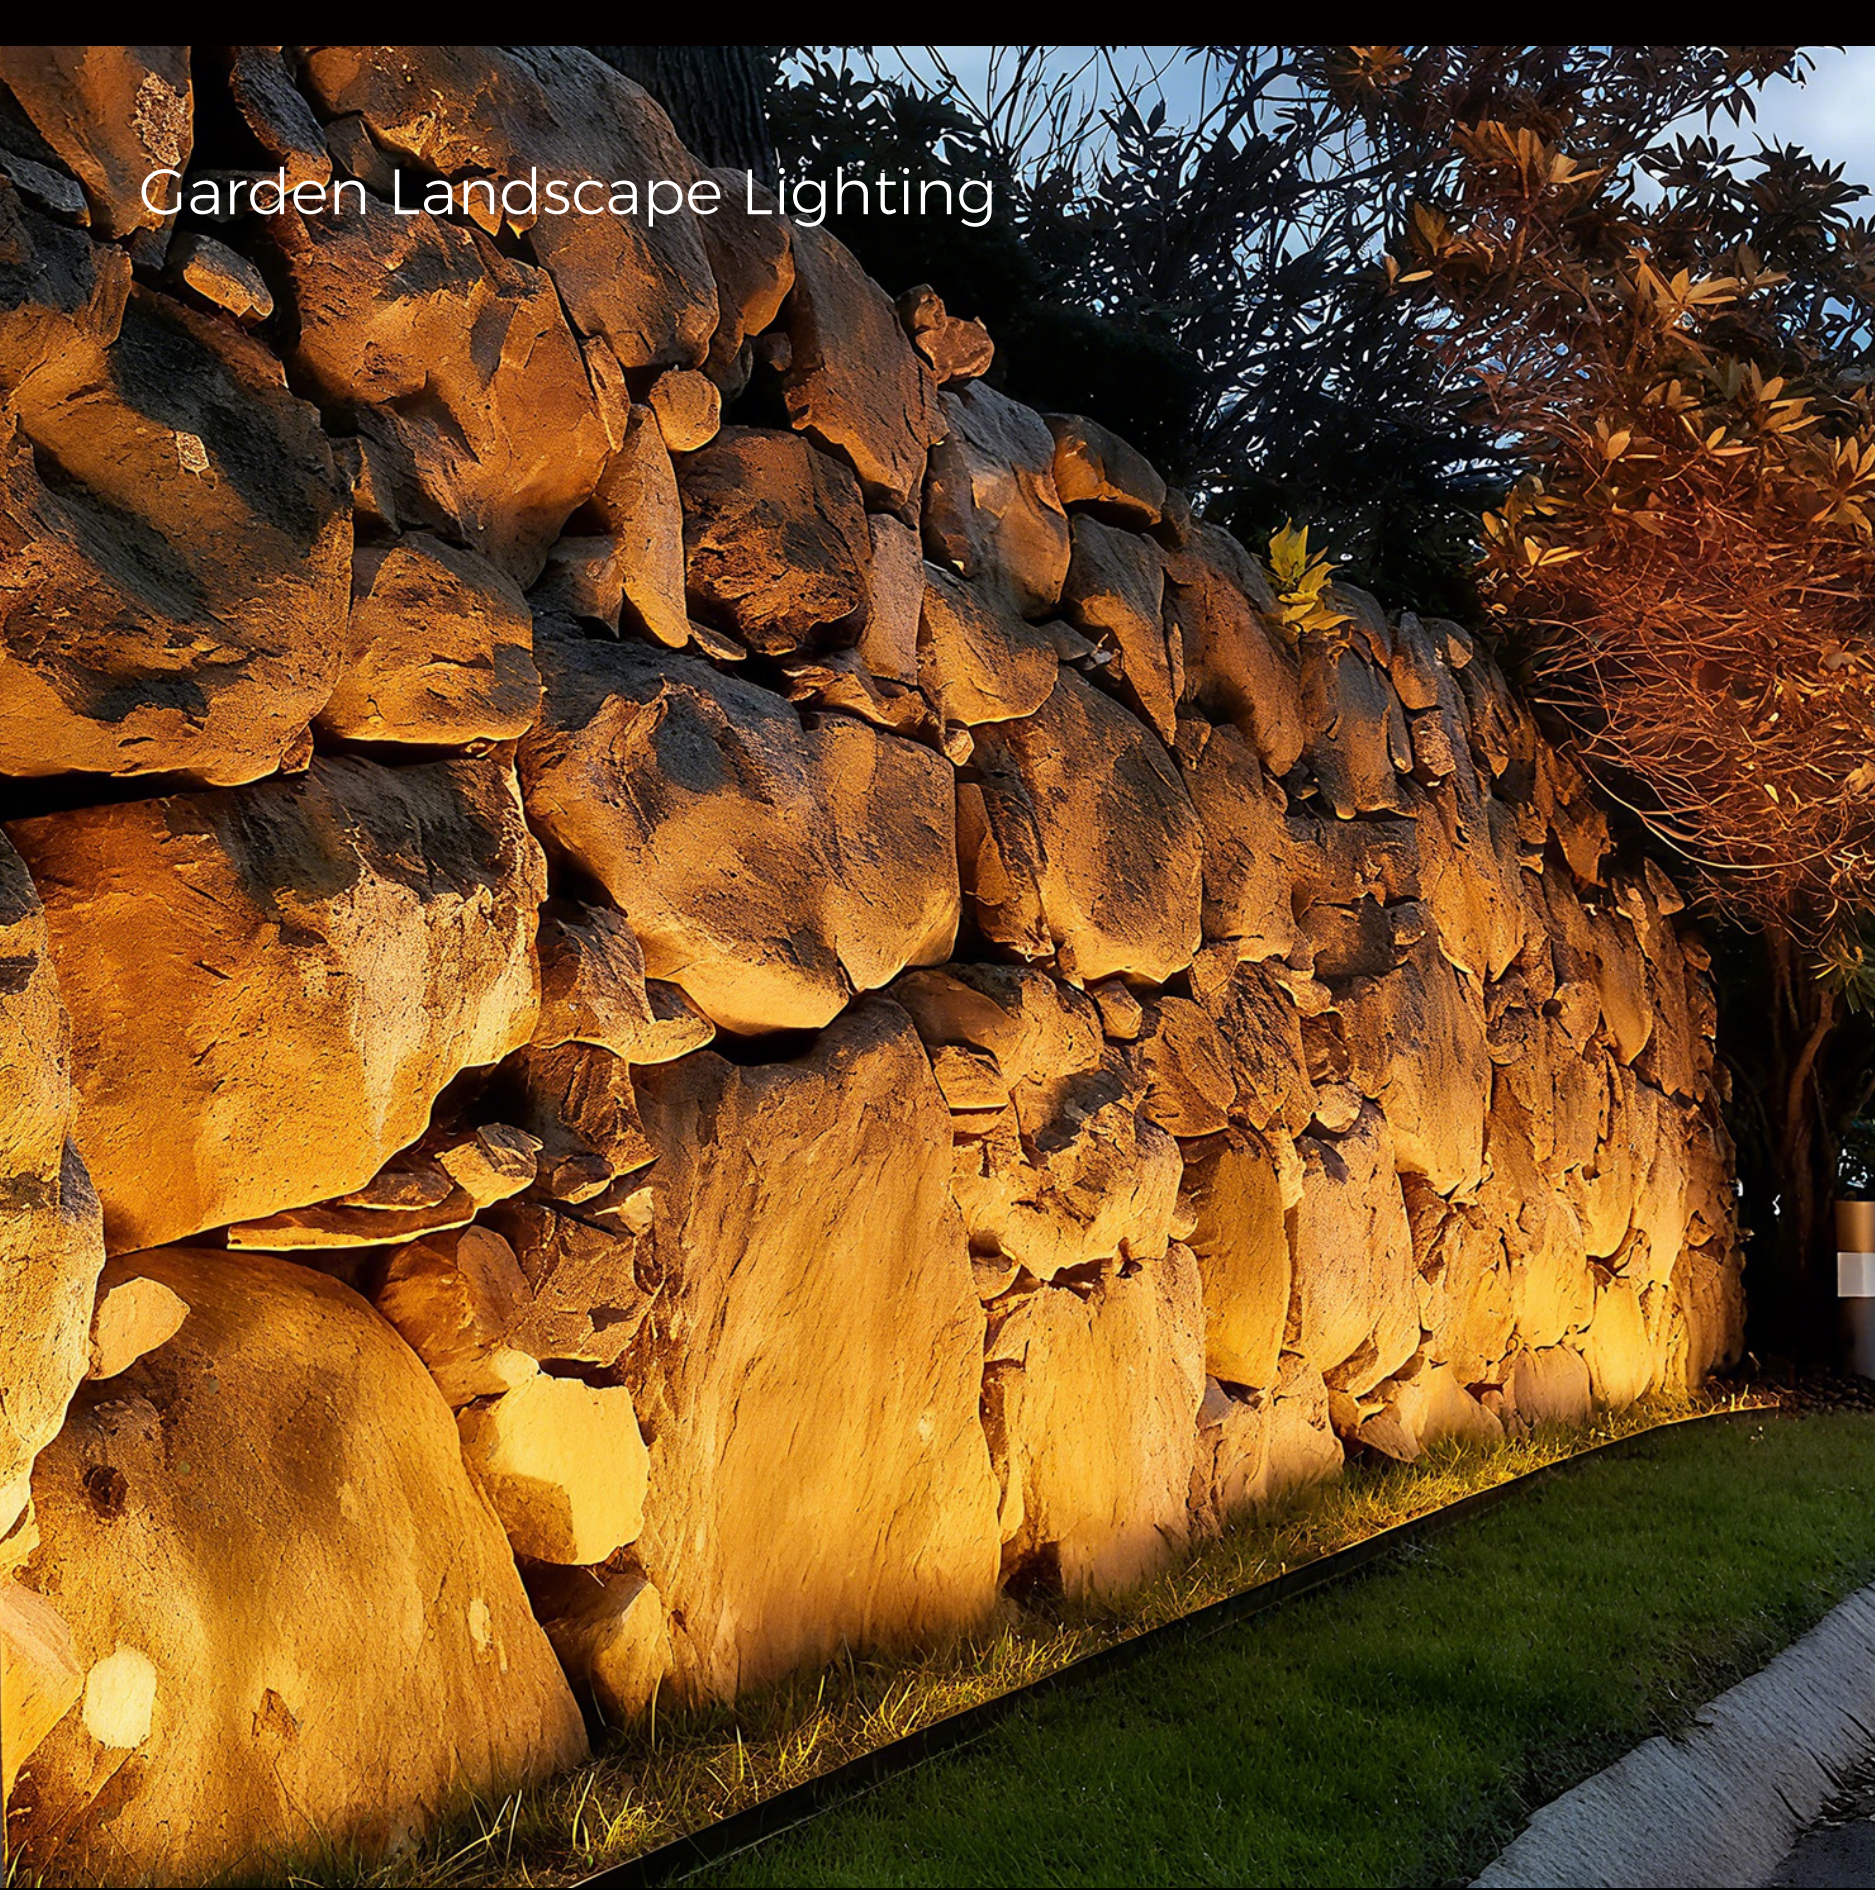


#### Recommended models

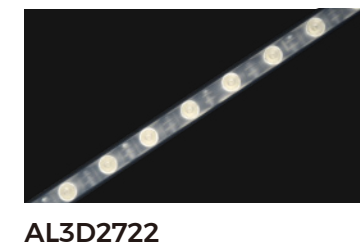

AL3D2722

**Recommendation Reasons:**  
Complex types of illuminated objects. Model AL3D2722: wall washing height 3-5m, moderate and versatile. Special-shaped uneven installation surfaces or combination of top and side mounting. The product supports 3D bending for easy installation. Outdoor use, exposed to wind and sun. IP67 waterproof, unaffected by rain and short-term submersion. High light control requirements. 25/35° wall washing angles available, can be paired with brackets to adjust detailed angles, meeting different lighting effect needs. Difficult construction, installation and maintenance. Requires a complete product installation solution: flat mounting + (low) light shields, reserved wire outlets + high/low light barriers optional.


#### Accessories

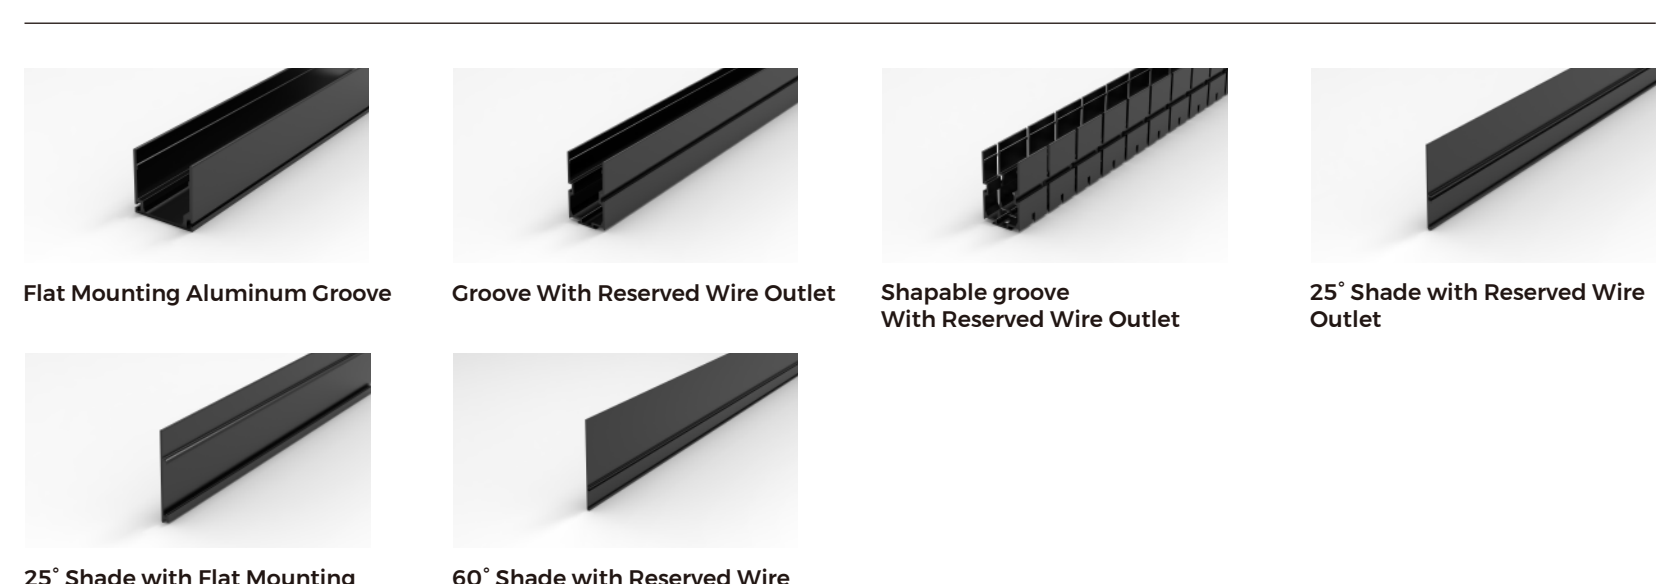

### Column-Wrapping Wall Washing




#### Recommended models

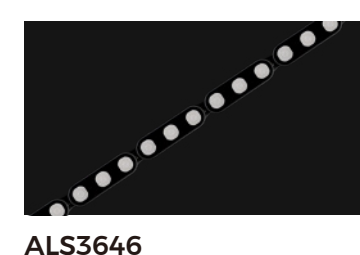


ALS3646

**Recommendation Reasons:**  
High wall washing height requirement. ALS3646 wall washer can achieve 8-10m washing height. Outdoor use, exposed to wind and sun. IP67 waterproof, unaffected by rain. High illumination distance and anti-glare requirements. Good luminous uniformity, multiple angles available. 12°/25° recommended for scenarios. Fixed with base expansion screws, high installation reliability. Maximum 4m terminal wire splicing.

## Model & Specifications

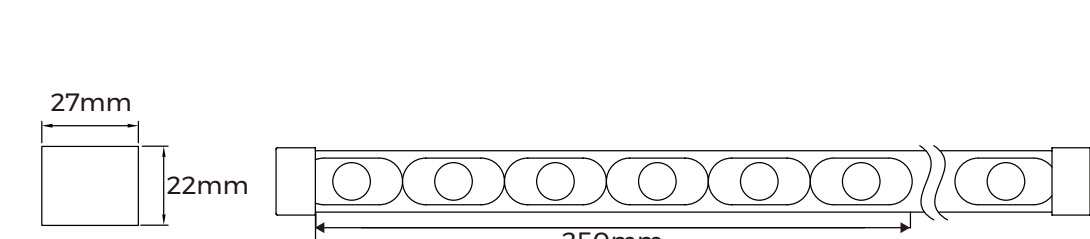

AL3D2722

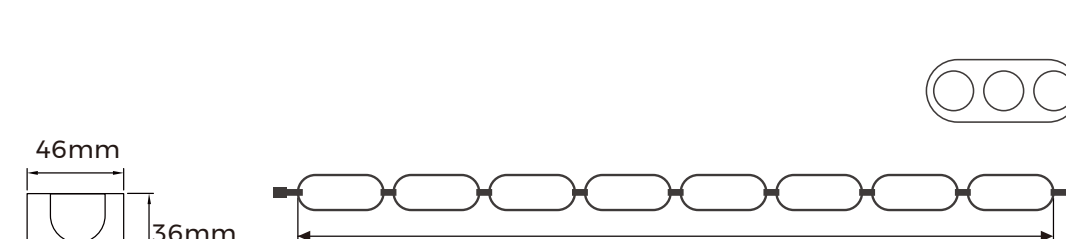

ALS3646

#### COLOR

- 2700 K
- 3000 K
- 3500 K
- 4000 K
- 6500 K

- 5 years
- IP67
- >90 CRI
- +50°C / -20°C