



ANTO+ 

 **planlicht**

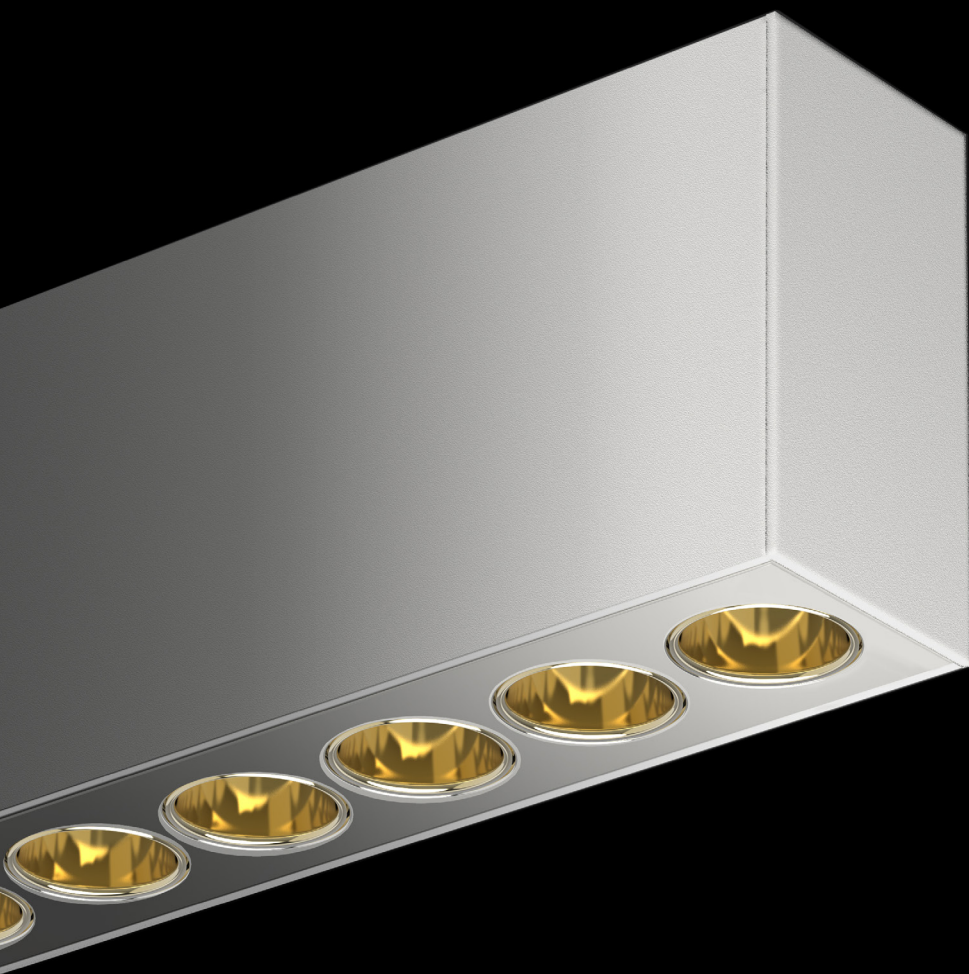


anto+

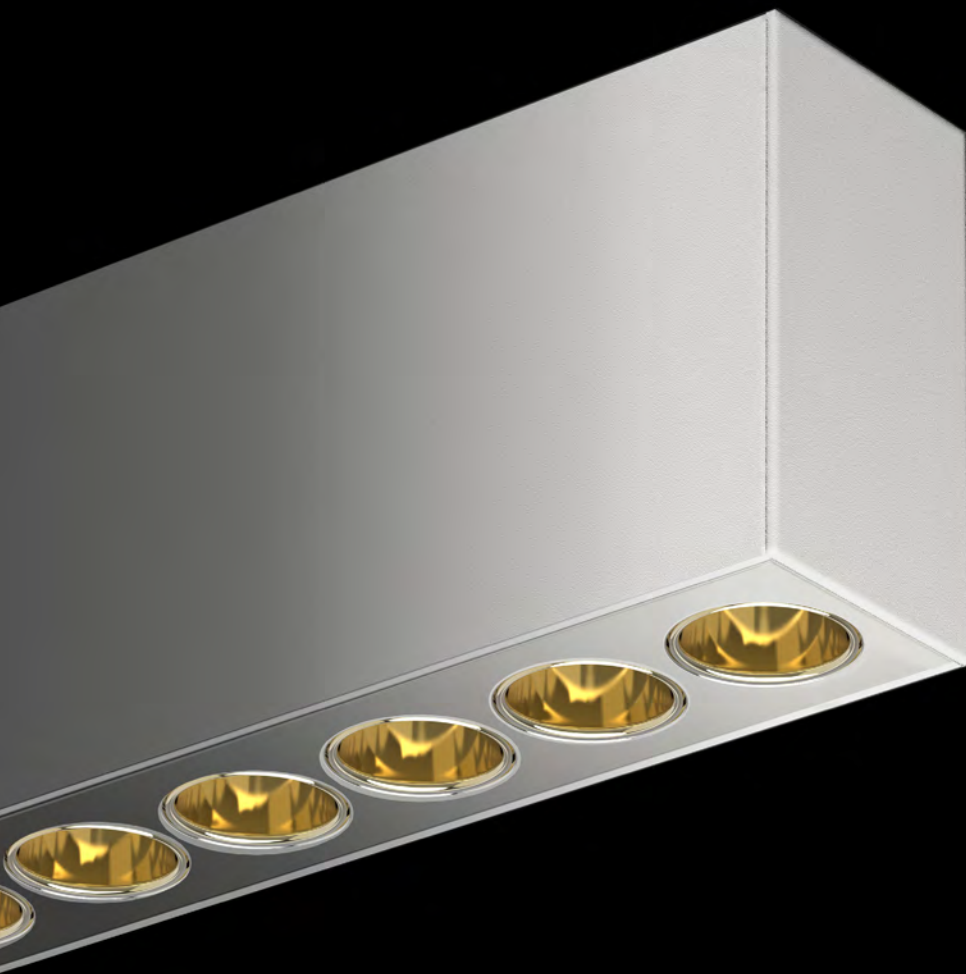


anto+


**LIKE JEWELLERY IN
LIGHTING DESIGN**



Surface



Recessed



Systems



ANTO+ LIKE JEWELLERY IN LIGHTING DESIGN

Projekt: Holiday Inn Messukeskus | Finland
Foto: © Sampsa Paernaenen

Project: Holiday Inn Messukeskus | Finland
Photo: © Sampsa Paernaenen





IKONISCHER LINSENTUBUS & MASKE

Verschiedene Farben in Metallic-Optik für einzigartige Meisterwerke.

Iconic lens tube & mask



BLENDFREIER SEHCOMFORT

Anspruchsvolle Linsentechnologie für blendfreien Augenkomfort.

Visual comfort



VERSCHIEDENE LINSEN

Verschiedene Strahlwinkel und ovale Formen zur Beleuchtung von Böden und Wänden.

Different lenses



NATÜRLICHE FARBWIEDERGABE

Der Farbwiedergabeindex (Ra > 90) dieser Leuchte garantiert natürliche Farben.

Natural color reproduction (CRI > 90)

EINFACHE INSTALLATION

Einbauversionen können mit Montagehalterungen einfach installiert werden.

Easy mounting

INSETS FÜR PROFILSYSTEME

Das anto+ Downlight ist auch für pure 3- und p.forty-Profilssysteme erhältlich.

Insets for profile systems

DYNAMISCHES WEISS

Human Centric Lighting mit einstellbarem Weißlicht von 2.700 bis 6.500 Kelvin.

Dynamic white

INDIVIDUELLE FARBEN

Die Gehäuse, Einsätze und Stromkabel sind in verschiedenen Farben erhältlich.


Individual colours




VERSCHIEDENE GRÖSSEN | VARIOUS SIZES



UNTERSCHIEDLICHE MONTAGEARTEN | DIFFERENT MOUNTING TYPES

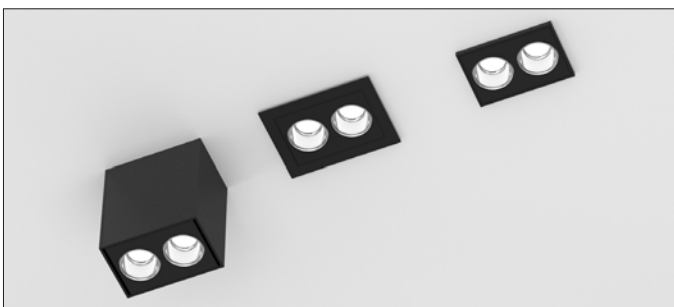

FARBKOMBINATIONEN | COLOUR COMBINATIONS

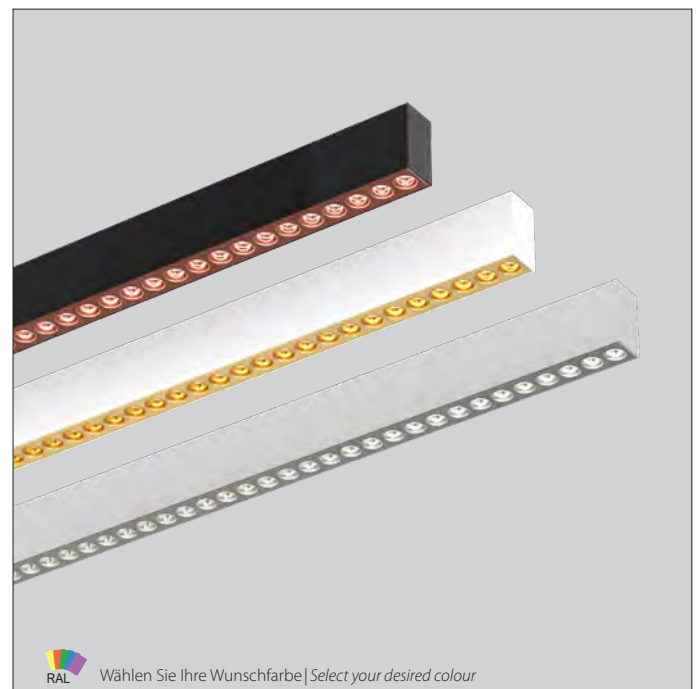

Wählen Sie Ihre Wunschfarbe | Select your desired colour

ANTO+ PROJEKTE

ANTO+ PROJECTS




NOBLESTYLE GRAZ | ÖSTERREICH

Produkt: anto+
Foto: © Alexander Kuenzel

NOBLESTYLE GRAZ | AUSTRIA

Product: anto+
Photo: © Alexander Kuenzel



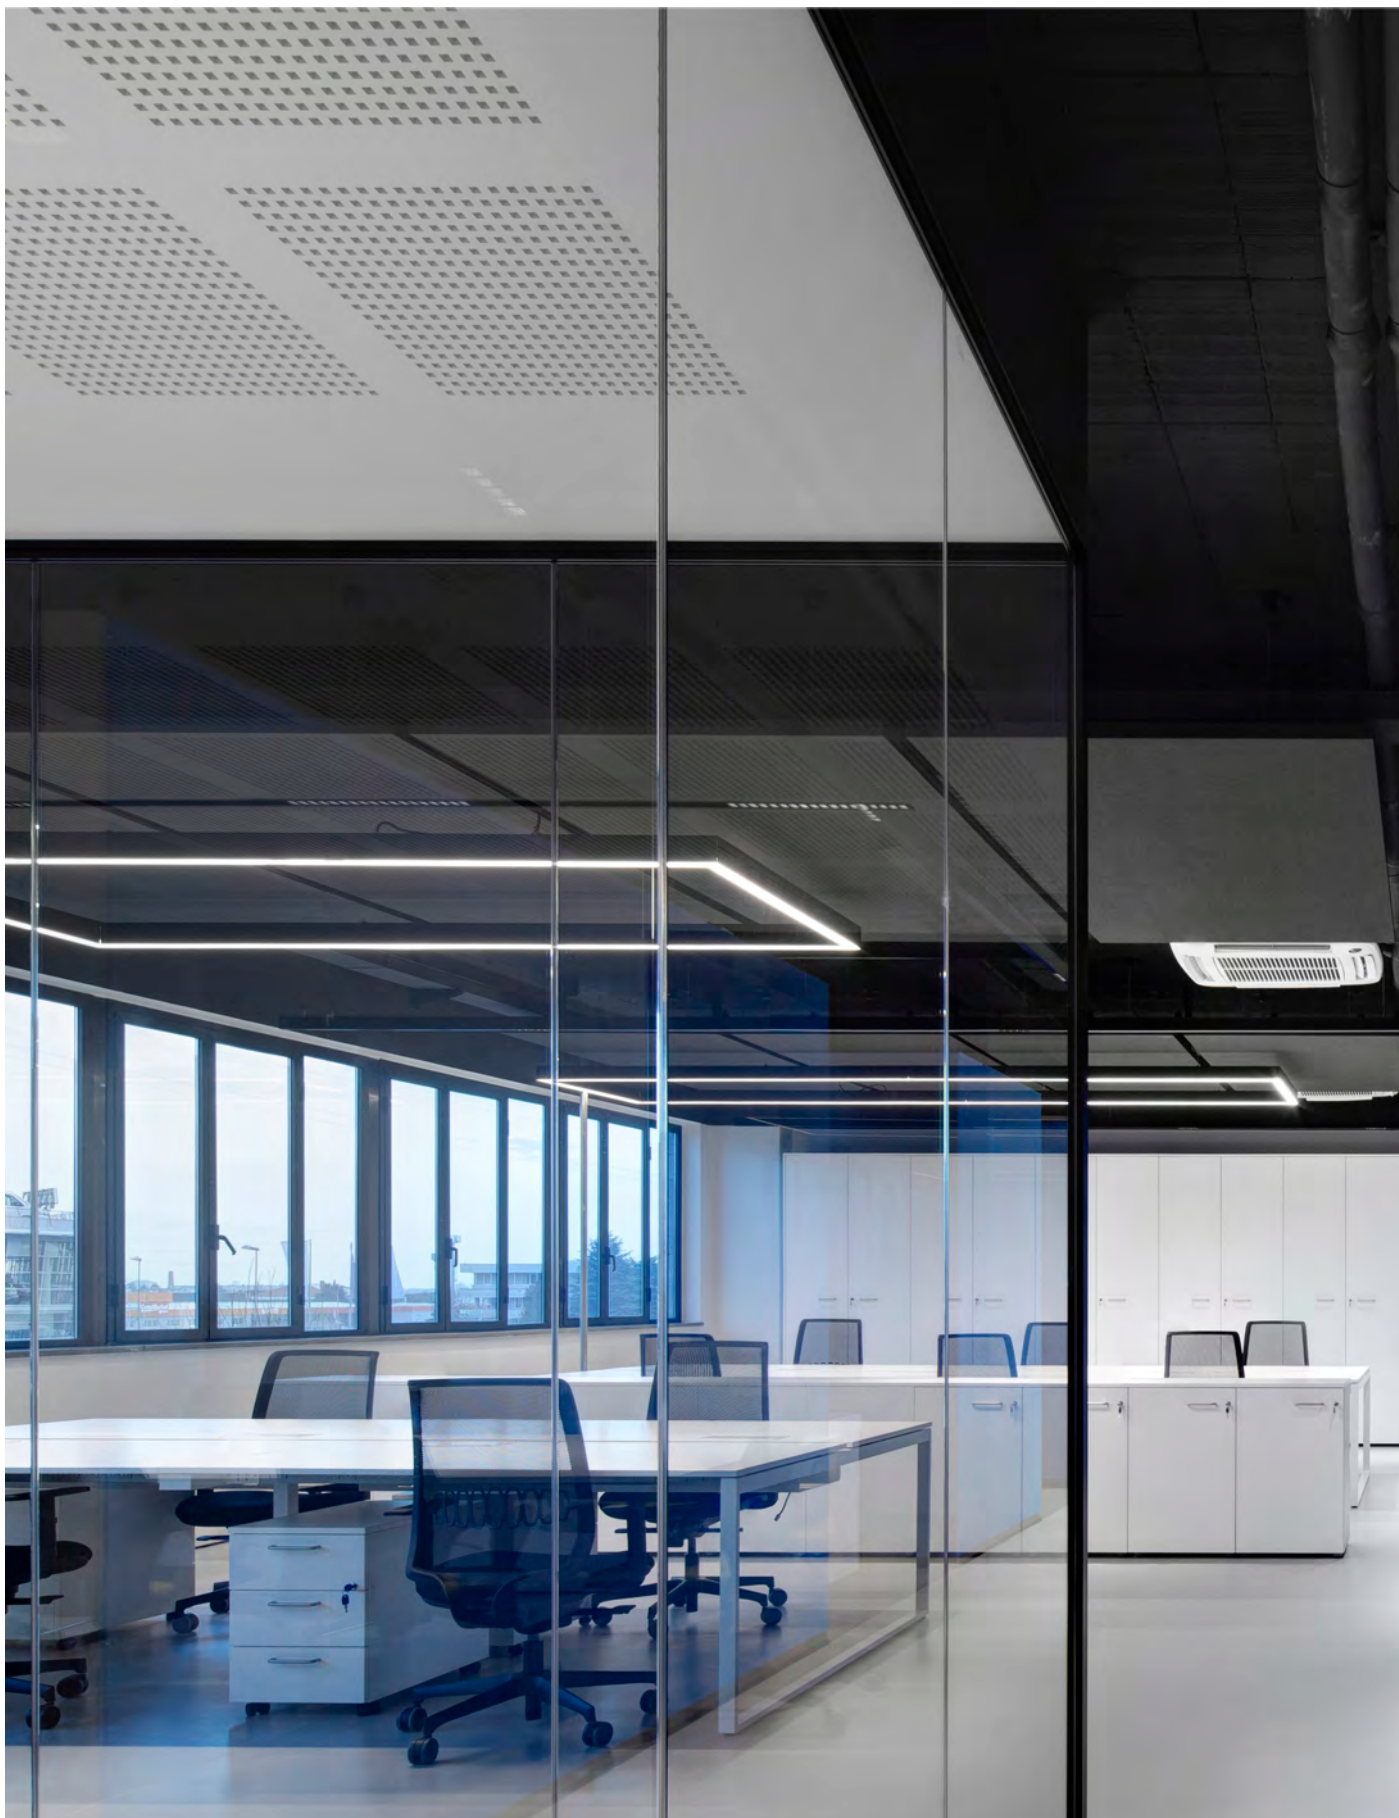

NUOVI UFFICI GIOBERT SPA RIVOLI | ITALIEN

Produkte: anto+, p.forty

NUOVI UFFICI GIOBERT SPA RIVOLI | ITALY

Products: anto+, p.forty



**NEUBAU GEMEINSCHAFTSSCHULE CAMPUS CORDIS |
DRESDEN, DEUTSCHLAND**

Produkte: anto+ insets, p.forty
Foto: © Robert Gommlich Fotografie | Planer: RBZ Generalplanungsgesellschaft,
Raum und Bau, AGZ Zimmermann Architekten GmbH

**NEUBAU GEMEINSCHAFTSSCHULE CAMPUS CORDIS |
DRESDEN, GERMANY**

Products: anto+ insets, p.forty
Photo: © Robert Gommlich Fotografie | Planning: RBZ Generalplanungsgesellschaft,
Raum und Bau, AGZ Zimmermann Architekten GmbH




DELUXE BERGBLICK APARTMENT | ÖSTERREICH

Produkte: anto+, halo

DELUXE BERGBLICK APARTMENT | AUSTRIA

Products: anto+, halo



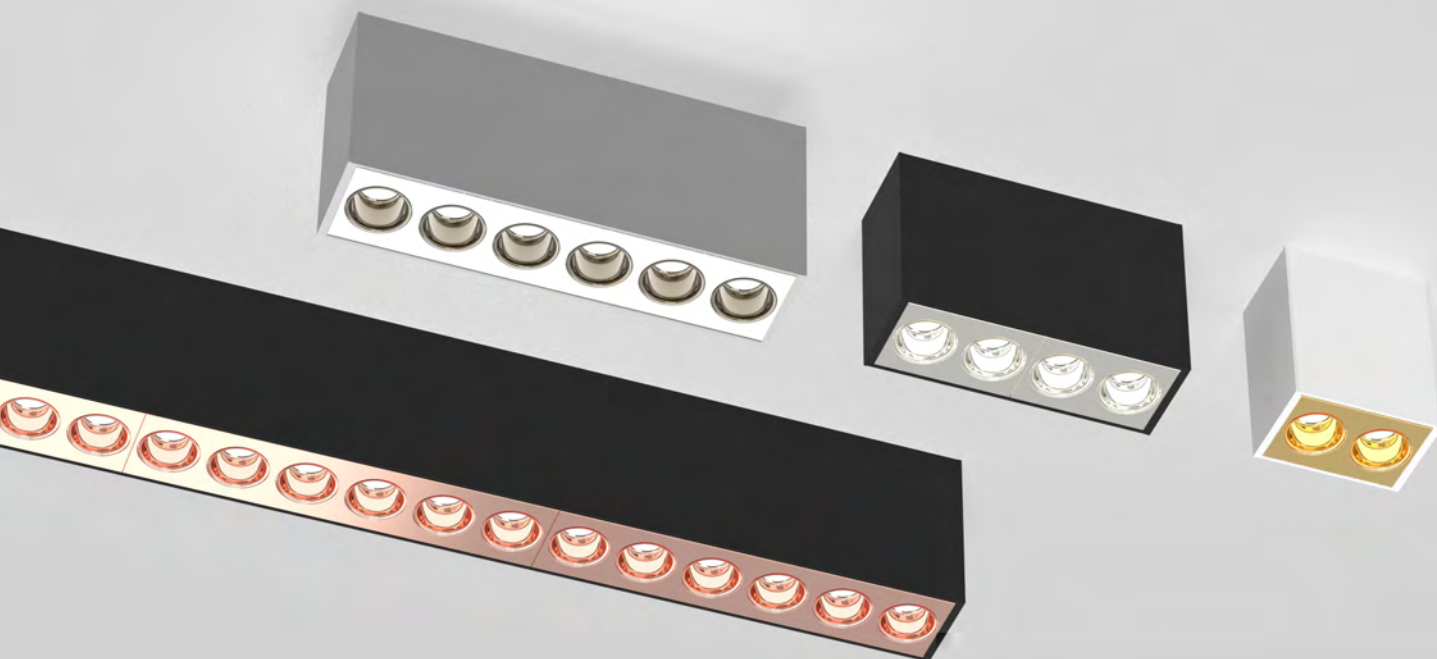

1 SIZE

2 spots - 67 mm
4 spots - 127 mm
6 spots - 187 mm
8 spots - 247 mm
12 spots - 367 mm
18 spots - 547 mm

006
012
018
024
036
054

2 TUBE COLOUR

high-gloss silver	B	black matte	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital copper	R
high-gloss copper	K	gunnery grey	Y
white matte	W	high gloss black chrome	Z

3 MASK COLOUR

high-gloss silver	B	black matte	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital copper	R
high-gloss copper	K	gunnery grey	Y
white matte	W	high-gloss black chrome	Z
UGR > 19 (only 45° 930/940)			

4 HOUSING COLOUR

	silver
	white
	black
	RAL of your choice

SI

WS

SW



5 LED

	2700 K, CRI > 90
	3000 K, CRI > 90
	4000 K, CRI > 90
	2700-6500 K, dynamic white, CRI > 90 (18 spots only)

927

930

940

HCL

6 OUTPUT & CONTROL

	medium output, non dim	M1
	medium output, DALI	M3
	dynamic white	X3



7 BEAM

	15°	1
	30°	3
	45°	4
	asymmetric / oval	A

S44A 1-2 3 4 C1 5 6 7

S44A024-KYWSC1HCLX3A 8 spots, lens tube high-gloss copper, mask gunnery grey, CRI > 90, housing white, IP20, direct, asymmetric, dynamic white, CRI 90, DALI, asymmetric (order sample)

> Configure online on KATALOG.PLANLICHT.COM

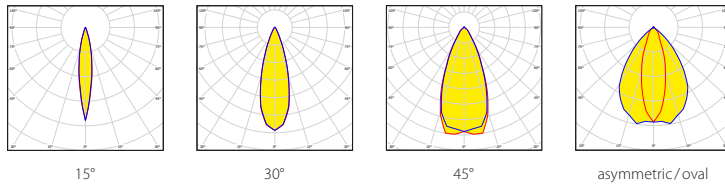

LUMINOUS FLUX (LM) ANTO+ / LENS TUBE SILVER MATTE

	2700 K CRI > 90				3000 K CRI > 90				4000 K output CRI > 90				dynamic white CRI > 90			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
2 spots	241 lm	220 lm	184 lm	193 lm	246 lm	224 lm	188 lm	197 lm	256 lm	234 lm	196 lm	205 lm				
4 spots	478 lm	435 lm	365 lm	382 lm	487 lm	444 lm	372 lm	390 lm	507 lm	463 lm	389 lm	406 lm				
6 spots	737 lm	672 lm	564 lm	590 lm	752 lm	685 lm	575 lm	602 lm	783 lm	714 lm	600 lm	627 lm				
8 spots	990 lm	901 lm	756 lm	791 lm	1008 lm	919 lm	770 lm	807 lm	1050 lm	958 lm	805 lm	840 lm				
12 spots	1526 lm	1391 lm	1167 lm	1221 lm	1557 lm	1418 lm	1190 lm	1246 lm	1621 lm	1478 lm	1242 lm	1298 lm				
18 spots	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1881 lm	1128 lm	1028 lm	863 lm	903 lm

SYSTEM POWER (W)


		dyn. white	
2 spots	4,1W		270 g
4 spots	7,7W		390 g
6 spots	10W		520 g
8 spots	14W		680 g
12 spots	19W		950 g
18 spots	29W	17W	1310 g

(based on medium non-dim)

VARIATIONS ANTO+ SURFACE

	MEDIUM OUTPUT		DYNAMIC WHITE
	non-dim	DALI	
2 spots	●	-	-
4 spots	●	-	-
6 spots	●	-	-
8 spots	●	●	-
12 spots	●	●	-
18 spots	●	●	●

3 MASK COLOUR

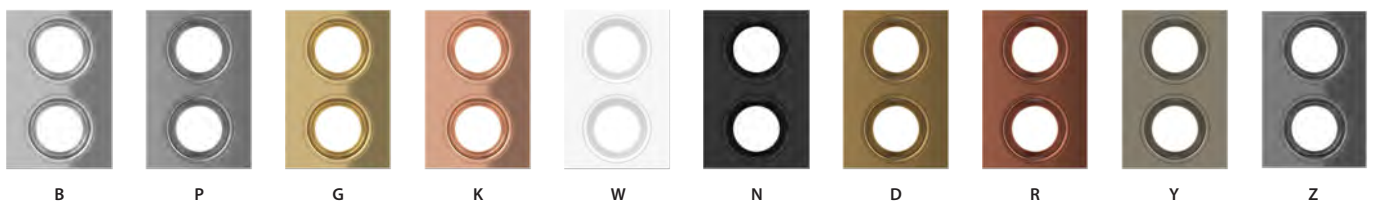


COMPARE LENS TUBES ANTO+ / SURFACE 18 SPOTS

lens tube	2700 K				3000 K				4000 K				dynamic white *			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
silver matte	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1181 lm	1128 lm	1028 lm	863 lm	903 lm
high-gloss silver	2364 lm	2169 lm	1986 lm	2124 lm	2412 lm	2211 lm	2025 lm	2166 lm	2511 lm	2307 lm	2112 lm	2303 lm	1206 lm	1106 lm	1013 lm	1083 lm
white matte	2307 lm	2124 lm	1848 lm	1944 lm	2352 lm	2166 lm	1884 lm	1983 lm	2451 lm	2256 lm	1965 lm	2150 lm	1177 lm	1083 lm	943 lm	991 lm
black matte	2118 lm	1920 lm	1497 lm	1494 lm	2160 lm	1959 lm	1527 lm	1524 lm	2250 lm	2040 lm	1590 lm	1587 lm	1080 lm	979 lm	763 lm	762 lm
high-gloss gold	2349 lm	2154 lm	1983 lm	2121 lm	2397 lm	2196 lm	2022 lm	2163 lm	2496 lm	2289 lm	2109 lm	2277 lm	1198 lm	1097 lm	1011 lm	1082 lm
high gloss copper	2325 lm	2145 lm	1983 lm	2067 lm	2373 lm	2187 lm	2022 lm	2109 lm	2472 lm	2280 lm	2106 lm	2213 lm	1186 lm	1094 lm	1011 lm	1054 lm
glaring gold	2172 lm	1971 lm	1584 lm	1644 lm	2214 lm	2010 lm	1617 lm	1677 lm	2310 lm	2094 lm	1683 lm	1746 lm	1108 lm	1005 lm	808 lm	838 lm
capital copper	2151 lm	1944 lm	1512 lm	1566 lm	2193 lm	1983 lm	1542 lm	1596 lm	2286 lm	2067 lm	1608 lm	1665 lm	1097 lm	991 lm	771 lm	799 lm
gunnery grey	2202 lm	1980 lm	1590 lm	1650 lm	2247 lm	2019 lm	1623 lm	1683 lm	2340 lm	2106 lm	1689 lm	1755 lm	1123 lm	1010 lm	811 lm	842 lm
high-gloss black-chrome	2107 lm	1933 lm	1770 lm	1893 lm	2150 lm	1971 lm	1805 lm	1931 lm	2238 lm	2056 lm	1883 lm	2053 lm	1075 lm	986 lm	903 lm	965 lm

* dynamic white lumens = 2700 K, Lumens 6500 K ca. +11%



Down to UGR ≤ 16 | up to 94 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

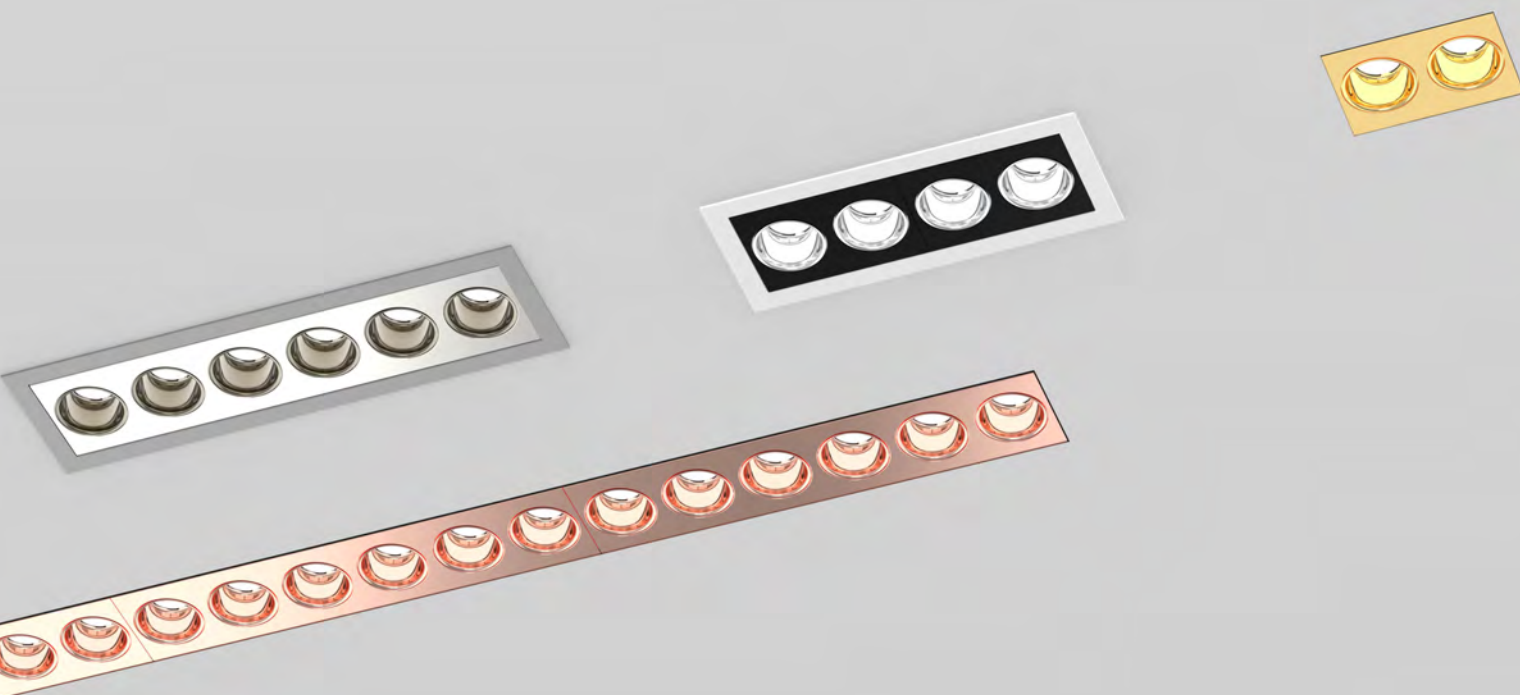

1 MOUNTING

Frame
Frameless

E
F

2 SIZE

FRAME

FRAMELESS

2 spots - 76 mm	007	2 spots - 64 mm	006
4 spots - 136 mm	013	4 spots - 124 mm	012
6 spots - 196 mm	019	6 spots - 184 mm	018
8 spots - 256 mm	025	8 spots - 244 mm	024
12 spots - 376 mm	037	12 spots - 364 mm	036
18 spots - 556 mm	055	18 spots - 544 mm	054

3 TUBE COLOUR

high-gloss silver	B	black matte	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital copper	R
high-gloss copper	K	gunnery grey	Y
white matte	W	high-gloss black chrome	Z

4 MASK COLOUR

high-gloss silver	B	black matte	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital copper	R
high-gloss copper	K	gunnery grey	Y
white matte	W	high-gloss black chrome	Z

5 HOUSING COLOUR

	silver
	white
	black
	RAL of your choice

SI
WS
SW

6 LED

	2700 K, CRI > 90	927
	3000 K, CRI > 90	930
	4000 K, CRI > 90	940
	2700-6500 K, dynamic white, CRI > 90	HCL

7 OUTPUT / CONTROL

	low output non-dim	L1
	high output non-dim	H1
	high output DALI	H3
	dynamic white	X3


8 BEAM

	15°	1
	30°	3
	45°	4
	asymmetric / oval	A

S44 1 2-3 4 5 C1 6 7 8

S44E019-RDSWC1927H33 Recessed frame, 6 spots, lens tube capital copper, mask glaring gold, housing black, IP 20, direct, 2700 K, CRI > 90, high output DALI, 30° (order sample)

► Configure online on KATALOG.PLANLICHT.COM

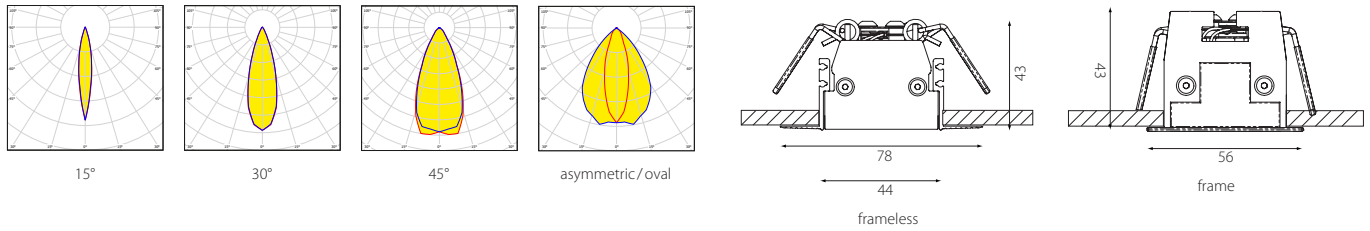

LUMINOUS FLUX (LM) anto+ / lens tube silver matte

	low output				high output				dynamic white			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
2700 K												
2 spots	193 lm	181 lm	151 lm	155 lm	336 lm	313 lm	264 lm	276 lm	-	-	-	-
4 spots	339 lm	326 lm	294 lm	305 lm	688 lm	637 lm	535 lm	572 lm	291 lm	280 lm	253 lm	262 lm
6 spots	560 lm	507 lm	419 lm	438 lm	969 lm	874 lm	716 lm	757 lm	482 lm	436 lm	360 lm	377 lm
8 spots	756 lm	712 lm	593 lm	609 lm	1357 lm	1266 lm	1066 lm	1115 lm	658 lm	612 lm	526 lm	530 lm
12 spots	1123 lm	1057 lm	881 lm	904 lm	1989 lm	1857 lm	1564 lm	1634 lm	966 lm	909 lm	757 lm	777 lm
18 spots	1674 lm	1576 lm	1312 lm	1346 lm	2952 lm	2756 lm	2319 lm	2424 lm	1423 lm	1340 lm	1115 lm	1144 lm
3000 K												
2 spots	197 lm	185 lm	154 lm	158 lm	343 lm	320 lm	269 lm	282 lm				
4 spots	346 lm	333 lm	300 lm	311 lm	702 lm	650 lm	546 lm	584 lm				
6 spots	552 lm	524 lm	427 lm	447 lm	949 lm	893 lm	734 lm	763 lm				
8 spots	772 lm	727 lm	605 lm	621 lm	1384 lm	1292 lm	1088 lm	1137 lm				
12 spots	1147 lm	1079 lm	899 lm	922 lm	2030 lm	1895 lm	1595 lm	1667 lm				
18 spots	1763 lm	1686 lm	1404 lm	1440 lm	3062 lm	2927 lm	2463 lm	2574 lm				
4000 K												
2 spots	205 lm	193 lm	161 lm	165 lm	357 lm	333 lm	280 lm	293 lm				
4 spots	360 lm	346 lm	312 lm	324 lm	731 lm	677 lm	569 lm	608 lm				
6 spots	575 lm	544 lm	446 lm	467 lm	993 lm	929 lm	764 lm	805 lm				
8 spots	805 lm	757 lm	630 lm	647 lm	1442 lm	1346 lm	1133 lm	1184 lm				
12 spots	1193 lm	1123 lm	935 lm	959 lm	2114 lm	1973 lm	1661 lm	1735 lm				
18 spots	1834 lm	1718 lm	1430 lm	1467 lm	3187 lm	3006 lm	2530 lm	2644 lm				

SYSTEM POWER (W)

	low output	high output	dynamic white
2 spots	3W	6,7W	-
4 spots	5,1W	10,5W	7W
6 spots	7,2W	13,5W	9,5W
8 spots	9,6W	18W	11,5W
12 spots	13W	26W	15,5W
18 spots	19,5W	41W	22W

VARIATIONS ANTO+ RECESSED

	LOW OUTPUT		HIGH OUTPUT		DYNAMIC
	non-dim	DALI	non-dim	DALI	WHITE
2 spots	●	-	●	●	-
4 spots	●	-	●	●	●
6 spots	●	-	●	●	●
8 spots	●	-	●	●	●
12 spots	●	-	●	●	●
18 spots	●	-	●	●	●



Down to UGR ≤ 16 | up to 99 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDim

COMPARE LENS TUBES ANTO+ / RECESSED 8 SPOTS / HIGH OUTPUT & DYNAMIC WHITE

lens tube	2700 K				3000 K				4000 K				dynamic white *			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
high-gloss silver	1428lm	1347lm	1240lm	1327lm	1457lm	1375lm	1265lm	1354lm	1518lm	1432lm	1317lm	1409lm	693lm	674lm	613lm	623lm
silver matte	1357lm	1266lm	1066lm	1115lm	1384lm	1292lm	1088lm	1137lm	1442lm	1346lm	1133lm	1184lm	658lm	612lm	526lm	530lm
high-gloss gold	1428lm	1347lm	1240lm	1327lm	1457lm	1375lm	1265lm	1354lm	1518lm	1432lm	1317lm	1409lm	693lm	662lm	612lm	623lm
high gloss copper	1392lm	1313lm	1215lm	1267lm	1421lm	1340lm	1240lm	1293lm	1480lm	1396lm	1290lm	1346lm	679lm	658lm	600lm	592lm
white matte	1392lm	1313lm	1141lm	1201lm	1421lm	1340lm	1164lm	1225lm	1480lm	1396lm	1212lm	1275lm	679lm	656lm	570lm	573lm
black matte	1271lm	1179lm	918lm	916lm	1297lm	1203lm	936lm	934lm	1351lm	1253lm	974lm	972lm	623lm	574lm	447lm	442lm
glaring gold	1299lm	1212lm	973lm	1009lm	1326lm	1237lm	993lm	1029lm	1381lm	1289lm	1034lm	1071lm	633lm	594lm	484lm	479lm
capital copper	1299lm	1212lm	942lm	975lm	1326lm	1237lm	961lm	995lm	1381lm	1289lm	1001lm	1036lm	626lm	582lm	469lm	467lm
gunnery grey	1299lm	1212lm	973lm	1009lm	1326lm	1237lm	993lm	1029lm	1381lm	1289lm	1034lm	1071lm	633lm	598lm	484lm	479lm
high-gloss black chrome	1273lm	1201lm	1105lm	1183lm	1299lm	1226lm	1128lm	1207lm	1353lm	1276lm	1174lm	1256lm	618lm	601lm	546lm	555lm

* dynamic white lumens = 2700 K, Lumens 6500 K ca. +11%

OPTIONAL ACCESSORY
S44-F-SET-MONT

anto+ Dis-/assembly kit **frameless** (3 parts)

anto+ De-/Montageset **frameless** (3 Teile)

anto+ Set de dé-/montage **sans cadre** (3 parties)

anto+ Kit di s-/montaggio **senza cornice** (3 parti)

	CUT OUT / WEIGHT (g)				FRAMELESS			
	FRAME	↑ DALI	↑ non-dim	↑ HCL	FRAMELESS	↑ DALI	↑ non-dim	↑ HCL
2 spots	70x49mm	X+160mm/290g	X+55mm/180g		73x52mm	X+160mm/340g	X+70mm/230g	
4 spots	130x49mm	X+90mm/360g	X+55mm/260g	X+191mm/510g	133x52mm	X+90mm/440g	X+70mm/340g	X+191mm/590g
6 spots	190x49mm	X+55mm/470g	X+55mm/440g	X+70mm/590g	193x52mm	X+70mm/570g	X+70mm/540g	X+70mm/690g
8 spots	250x49mm	X+55mm/540g	X+55mm/520g	X+70mm/660g	253x52mm	X+70mm/660g	X+70mm/640g	X+70mm/780g
12 spots	370x49mm	X+55mm/700g	X+55mm/650g	X+70mm/800g	373x52mm	X+70mm/860g	X+70mm/810g	X+70mm/960g
18 spots	550x49mm	X+70mm/940g	X+55mm/840g	X+70mm/1030g	553x52mm	X+70mm/1135g	X+70mm/1030g	X+70mm/1240g

X = 10-40 mm



HOLIDAY INN MESSUKESKUS | FINNLAND

Produkt: anto+
Foto: © Sampsa Paernaenen

HOLIDAY INN MESSUKESKUS | FINLAND

Product: anto+
Photo: © Sampsa Paernaenen

anto+ inset for p.forty & pure 3 systems

Systeme | Downlight Inset p.forty & pure 3
Systems | Downlight Inset p.forty & pure 3



1 SYSTEM

pure 3	33
p.forty	40

2 SPOTS

2 spots
4 spots
6 spots (2 x 100 mm Blind Cover)
8 spots (2 x 100 mm Blind Cover)
12 spots (2 x 100 mm Blind Cover)
18 spots
30 spots

3 LENS TUBE COLOUR

02	high-gloss silver	B	black matte	N
04	silver matte	P	glaring gold	D
06	high-gloss gold	G	capital cooper	R
08	high-gloss cooper	K	gunnery grey	Y
12	white matte	W	high gloss black chrome	Z
18				
30				

4 MASK COLOUR

high-gloss silver	B	black matte	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital cooper	R
high-gloss cooper	K	gunnery grey	Y
white matte	W	high gloss black chrome	Z
		(for p.forty only)	

5 LED

	2700 K, CRI > 90	927
	3000 K, CRI > 90	930
	4000 K, CRI > 90	940
	2700 - 6500 K, dynamic white, CRI > 90	HCL
	12/18/30 spots	

6 OUTPUT

	medium output	M
	dynamic white	X

7 DIM

	non-dim	1
	DALI	3


8 BEAM ANGLE

	15°	1
	30°	3
	45°	4
	asymmetric/oval	A

P-A 1-2 3 4 5 6 7 8

P40-A18-PZ940M14 Inset 18 spots, for p.forty, lens tube silver matte, mask high gloss black chrome, 4000 K, CRI > 90, medium output, non-dim, beam angle 45° (order sample)

► Configure online on KATALOG.PLANLICHT.COM

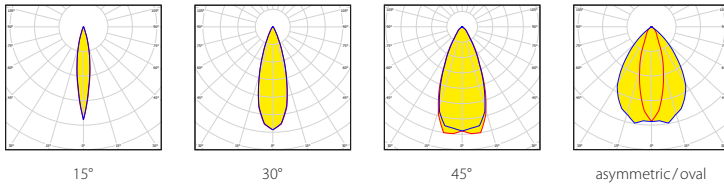
LUMINOUS FLUX (LM) / ANTO+ / LENS TUBE SILVER MATTE, CRI > 90

	2700 K				3000 K				4000 K				dynamic white			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
2 spots	241 lm	220 lm	184 lm	193 lm	246 lm	224 lm	188 lm	197 lm	256 lm	234 lm	196 lm	205 lm	-	-	-	-
4 spots	478 lm	435 lm	365 lm	382 lm	487 lm	444 lm	372 lm	390 lm	507 lm	463 lm	389 lm	406 lm	-	-	-	-
6 spots	737 lm	672 lm	564 lm	590 lm	752 lm	685 lm	575 lm	602 lm	783 lm	714 lm	600 lm	627 lm	-	-	-	-
8 spots	990 lm	901 lm	756 lm	791 lm	1008 lm	919 lm	770 lm	807 lm	1050 lm	958 lm	805 lm	840 lm	-	-	-	-
12 spots	1526 lm	1391 lm	1167 lm	1221 lm	1557 lm	1418 lm	1190 lm	1246 lm	1621 lm	1478 lm	1242 lm	1298 lm	752 lm	685 lm	575 lm	602 lm
18 spots	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1181 lm	1128 lm	1028 lm	863 lm	903 lm
30 spots	3685 lm	3360 lm	2820 lm	2950 lm	3760 lm	3425 lm	2875 lm	3010 lm	3915 lm	3570 lm	3000 lm	3135 lm	1880 lm	1713 lm	1438 lm	1505 lm

COMPARE LENS TUBE ANTO+ INSET 18 SPOTS

lens tube	4000 K			
	15°	30°	45°	asym.
high-gloss silver	2511 lm	2307 lm	2112 lm	2303 lm
silver matte	2349 lm	2142 lm	1800 lm	1881 lm
high-gloss gold	2496 lm	2289 lm	2109 lm	2277 lm
high-gloss copper	2472 lm	2280 lm	2106 lm	2213 lm
white matte	2451 lm	2256 lm	1965 lm	2150 lm
black matte	2250 lm	2040 lm	1590 lm	1587 lm
glaring gold	2310 lm	2094 lm	1683 lm	1746 lm
capital copper	2286 lm	2067 lm	1608 lm	1665 lm
gunnery grey	2340 lm	2106 lm	1689 lm	1755 lm
high-gloss black chrome	2238 lm	2056 lm	1883 lm	2053 lm

SYSTEM POWER (W) / WEIGHT


	non dim DALI	dyn. white	Inset p.forty		Inset pure 3	
			non-dim	DALI/HCL	non-dim	DALI/HCL
2 spots	4,1W		0,1 kg		0,1 kg	
4 spots	7,7W		0,1 kg		0,1 kg	
6 spots	10W		0,3 kg	0,4 kg	0,3 kg	0,4 kg
8 spots	14W		0,5 kg	0,5 kg	0,5 kg	0,5 kg
12 spots	19W	11 W	0,5 kg	0,6 kg	0,6 kg	0,6 kg
18 spots	29W	17W	0,6 kg	0,6 kg	0,6 kg	0,7 kg
30 spots	47W	27W	1,0 kg	1,0 kg	1,0 kg	1,0 kg

VARIATIONS ANTO+ INSETS

	MEDIUM OUTPUT		DYNAMIC
	non-dim	DALI	WHITE
2 spots	●	-	-
4 spots	●	-	-
6 spots	●*	●*	-
8 spots	●*	●*	-
12 spots	●*	●*	●*
18 spots	●	●	●
30 spots	●	●	●

* blind cover



COMPARE LENS TUBES / ANTO+ INSET 18 SPOTS

lens tube	2700K				3000K				4000K				dynamic white			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
silver matte	2211lm	2016lm	1692lm	1770lm	2256lm	2055lm	1725lm	1806lm	2349lm	2142lm	1800lm	1881lm	1128lm	1028lm	863lm	903lm
high-gloss silver	2364lm	2169lm	1986lm	2124lm	2412lm	2211lm	2025lm	2166lm	2511lm	2307lm	2112lm	2303lm	1206lm	1099lm	923lm	965lm
white matte	2307lm	2124lm	1848lm	1944lm	2352lm	2166lm	1884lm	1983lm	2451lm	2256lm	1965lm	2150lm	1177lm	1073lm	900lm	942lm
black matte	2118lm	1920lm	1497lm	1494lm	2160lm	1959lm	1527lm	1524lm	2250lm	2040lm	1590lm	1587lm	1081lm	985lm	827lm	865lm
high-gloss gold	2349lm	2154lm	1983lm	2121lm	2397lm	2196lm	2022lm	2163lm	2496lm	2289lm	2109lm	2277lm	1198lm	1092lm	917lm	959lm
high gloss copper	2325lm	2145lm	1983lm	2067lm	2373lm	2187lm	2022lm	2109lm	2472lm	2280lm	2106lm	2213lm	1186lm	1081lm	907lm	950lm
glaring gold	2172lm	1971lm	1584lm	1644lm	2214lm	2010lm	1617lm	1677lm	2310lm	2094lm	1683lm	1746lm	1108lm	1010lm	848lm	887lm
capital copper	2151lm	1944lm	1512lm	1566lm	2193lm	1983lm	1542lm	1596lm	2286lm	2067lm	1608lm	1665lm	1097lm	1000lm	840lm	878lm
gunnery grey	2202lm	1980lm	1590lm	1650lm	2247lm	2019lm	1623lm	1683lm	2340lm	2106lm	1689lm	1755lm	1123lm	1024lm	859lm	899lm
high gloss black chrome	2107lm	1933lm	1770lm	1893lm	2150lm	1971lm	1805lm	1931lm	2238lm	2056lm	1883lm	2053lm	1075lm	980lm	822lm	861lm



NOBELSTYLE GRAZ

Produkt: anto+ insets
Fotos: © Alexander Kuenzel


NOBELSTYLE GRAZ

Product: anto+ insets
Photos: © Alexander Kuenzel



FARBKARTEN | RASTER, MASKEN & TUBI

COLOUR CHARTS | LOUVRES, MASKS & TUBES

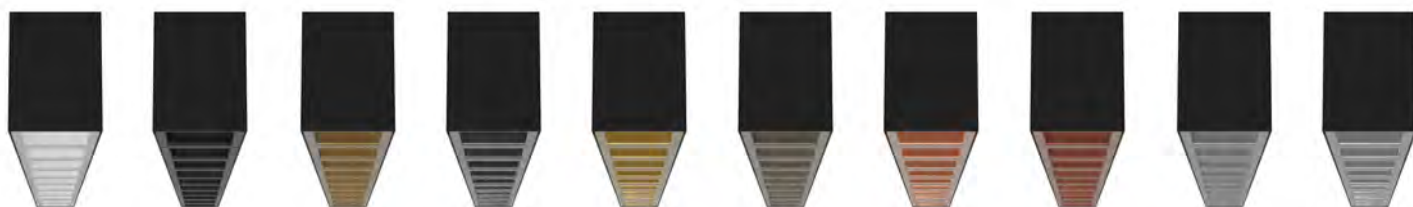

white
9019

black
9005

glaring
gold

high-gloss
black
chrome

high-gloss
gold

gunnery
grey

high-gloss
copper


capital
copper

silver
matte

high-gloss
silver



ANTO+ | BESTANDTEILE
ANTO+ | COMPONENTS

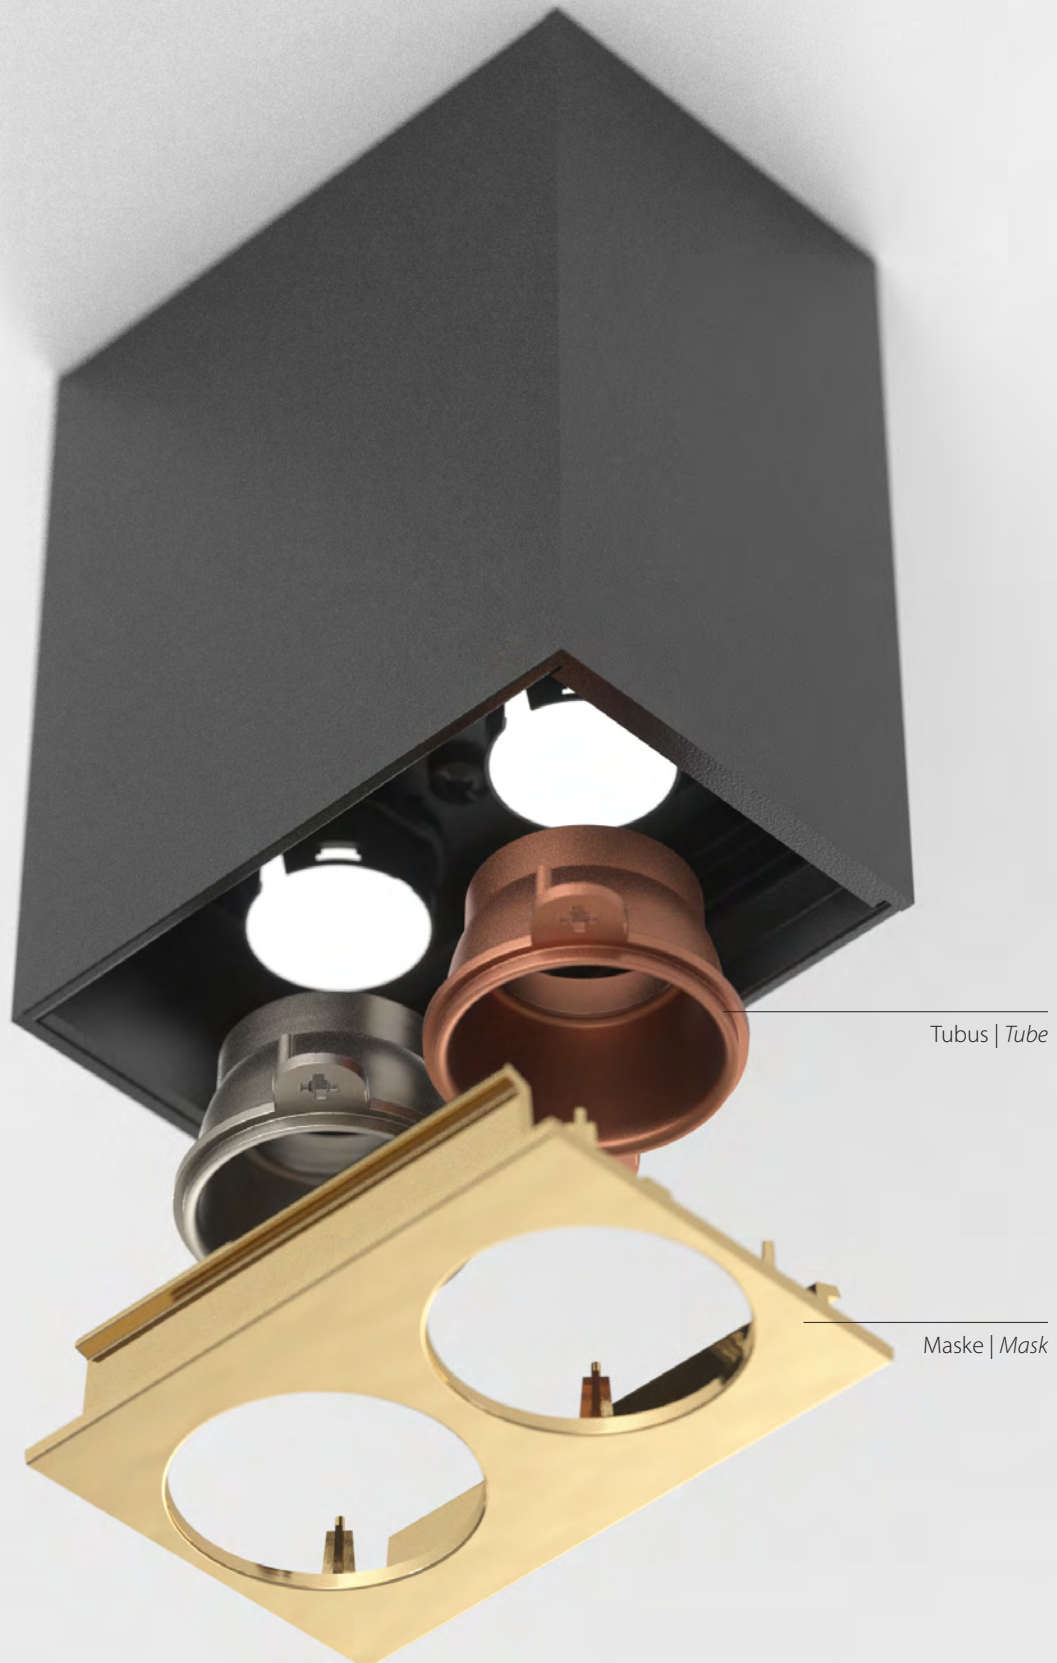

RAL OF YOUR CHOICE | OPTIONAL HOUSING COLOURS



WICHTIGE HINWEISE

Dieser Katalog richtet sich ausschliesslich an gewerbliche Kunden. Die in diesem Katalog angegebenen Werte sind Bemessungswerte und unterliegen produktionsbedingten Toleranzen*. Alle angeführten Angaben – insbesondere Grössen-, Material-, Farb- und technische Angaben – entsprechen dem Stand zum Zeitpunkt des Drucks und dienen ausschliesslich zur Information. Der Herausgeber haftet nicht für Satz- und Druckfehler sowie für Abweichungen der Produkte von Abbildungen und Angaben. PLANLICHT behält sich vor, jederzeit ohne Ankündigung Änderungen an Produkten vor zu nehmen. Es gelten die Allgemeinen Geschäftsbedingungen der planlicht GmbH & Co KG, die unter WWW.PLANLICHT.COM/AGB-LANDING/ eingesehen werden können.

Technische Kennzahlen, angeführte Werte und die Piktogramme betreffen zumindest einen aber nicht zwingend alle Artikel der jeweiligen Leuchtenfamilie, exakte Angaben je Artikel finden Sie im Online-Katalog bzw. in PLANLICHT-Verkaufsbelegen und Datenblättern.

WEEE-Reg.-Nr. DE 54728470

* Leistung, Lichtstrom und Farbtemperatur unterliegen durch den Einsatz von elektronischen Bauteilen produktionsbedingten Toleranzen. Toleranzen Leistung und Lichtstrom: +/- 10%. Toleranz Farbtemperatur: +/- 150 K. Lichtstrom dynamisch weiss bei 2700 K.

IMPORTANT REMARKS

This catalogue is reserved for professionals only. The values published in this catalogue are rated values, which can slightly change for reasons related to the production process. The published data such as dimensions, materials, colours and technical data are valid at time of printing, and exclusively provided for informational purposes. The editor takes no responsibility for typographical and print errors, as well as for any differences in the products, pictures and data. PLANLICHT reserves the right to change the products at any time and without any notice. The Terms and Conditions of planlicht GmbH & Co KG (available on WWW.PLANLICHT.COM/AGB-LANDING/) shall apply.*

Key technical specifications, listed values as well as the pictogram bar relate to at least one but not necessarily all items of the respective luminaire family, exact details for each item can be found in the online web catalogue or in PLANLICHT sales documents and data sheets.

** The power output, luminous flux and colour temperature can be slightly different due to specific electronic components used in the manufacturing process. The power output and luminous flux can differ by +/- 10%. The colour temperature can differ by +/- 150 K. Luminous flux dynamic white at 2700 K.*

RELEVANTE INFORMATIONEN AUF EINEN BLICK

- Allgemeine Geschäfts- & Lieferbedingungen – Die Grundlage unserer Zusammenarbeit
- Garantie 66 – Das Qualitätsversprechen im Detail
- Technische Hinweise – Wichtige Informationen zur Planung
- Produktseiten – So lesen Sie unsere Übersichten
- Artikelnummer – Die Logik hinter dem Code
- Piktogramme – Die Symbole und ihre Bedeutung



RELEVANT INFORMATION AT A GLANCE

- Terms & Conditions – The Basis of Our Cooperation
- Guarantee 66 – Our Commitment to Quality
- Technical Notes – Essential Guidance for Planning
- Product Pages – How to Read Our Overviews
- Article Number – The Logic Behind the Code
- Pictograms – The Meaning Behind the Symbols

NOTLICHT | EMERGENCY LIGHTING

NOTLICHTTAUGLICHE VARIANTEN ERHÄLTICH | EMERGENCY LIGHTING AVAILABLE

ANTO+

frame/frameless

	LO	HO	HCL
2 spots	-	-	-
4 spots	●	●	-
6 spots	●	●	-
8 spots	●	●	-
12 spots	●	●	-
18 spots	-	-	-

● Notlichttaugliche Variante erhältlich | Emergency lighting available

○ Notlichttaugliche Variante teilweise erhältlich | Emergency lighting partially available

- Notlichttaugliche Variante nicht erhältlich | Emergency lighting not available

Erstladung | Initial charging

3,7W

Schnellladung | Quick charging

4,1W

Erhaltungsladung | Trickle charging

2,8W



IMPRINT

Publisher: planlicht GmbH & Co. KG, Vomp
Creative Concept: Katrin Atzinger
Graphic Design: Beatrice Praxmarer, Christoph Höflinger
Print: Kraler Druck, Vahrn (BZ)
 © 2026



6134 Vomp, Austria, Au 25
 Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com
WWW.PLANLICHT.COM



ANTO+



WWW.PLANLICHT.COM